



# Artix™

---

## Getting Started with Artix

Version 4.0, March 2006

IONA Technologies PLC and/or its subsidiaries may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this publication. Except as expressly provided in any written license agreement from IONA Technologies PLC, the furnishing of this publication does not give you any license to these patents, trademarks, copyrights, or other intellectual property. Any rights not expressly granted herein are reserved.

IONA, IONA Technologies, the IONA logo, Orbix, Orbix Mainframe, Orbix Connect, Artix, Artix Mainframe, Artix Mainframe Developer, Mobile Orchestrator, Orbix/E, Orbacus, Enterprise Integrator, Adaptive Runtime Technology, and Making Software Work Together are trademarks or registered trademarks of IONA Technologies PLC and/or its subsidiaries.

Java and J2EE are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. CORBA is a trademark or registered trademark of the Object Management Group, Inc. in the United States and other countries. All other trademarks that appear herein are the property of their respective owners.

While the information in this publication is believed to be accurate, IONA Technologies PLC makes no warranty of any kind to this material including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. IONA shall not be liable for errors contained herein, or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

---

#### COPYRIGHT NOTICE

No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, photocopying, recording or otherwise, without prior written consent of IONA Technologies PLC. No third-party intellectual property right liability is assumed with respect to the use of the information contained herein. IONA Technologies PLC assumes no responsibility for errors or omissions contained in this publication. This publication and features described herein are subject to change without notice.

Copyright © 1999-2006 IONA Technologies PLC. All rights reserved.

All products or services mentioned in this publication are covered by the trademarks, service marks, or product names as designated by the companies that market those products.

Updated: 08-May-2006

# Contents

<b>List of Figures</b>	<b>v</b>
<b>Preface</b>	<b>vii</b>
What is Covered in this Book	vii
Who Should Read this Book	vii
Organization of this Book	vii
The Artix Library	vii
Getting the Latest Version	x
Searching the Artix Library	x
Artix Online Help	xi
Artix Glossary	xi
Additional Resources	xi
Document Conventions	xii
<b>Chapter 1 Introduction</b>	<b>1</b>
What is Artix?	2
Solving Problems with Artix	7
Using the Artix Documentation	9
<b>Chapter 2 Artix Concepts</b>	<b>13</b>
The Artix Runtime Components	14
The Artix Bus	15
Artix Endpoints	16
Artix Contracts	17
Artix Services	19
<b>Chapter 3 Understanding WSDL</b>	<b>21</b>
WSDL Basics	22
Abstract Data Type Definitions	25
Abstract Message Definitions	28
Abstract Interface Definitions	31
Mapping to the Concrete Details	34

<b>Chapter 4 Using Artix Designer</b>	<b>35</b>
<b>Introduction</b>	<b>36</b>
<b>Creating Artix Designer Projects</b>	<b>42</b>
<b>Creating a WSDL File</b>	<b>44</b>
<b>Defining the WSDL Elements</b>	<b>46</b>
Defining Types	47
Defining Messages	52
Defining Port Types	55
Defining Bindings	59
Defining a Service	63
<b>Developing the Applications</b>	<b>67</b>
Creating code generation configurations	68
<b>Adding Logic to the Code</b>	<b>74</b>
The Java Code	75
The C++ Code	77
<b>Running the Applications</b>	<b>80</b>
<b>Index</b>	<b>83</b>

# List of Figures

Figure 1: Artix High-Performance Architecture	4
Figure 2: Artix Runtime Components	14
Figure 3: The Empty JavaHello Project in the Navigator View	43
Figure 4: The CppHello Project With a Link to the HelloWorld.wsdl File	45
Figure 5: The Select Source Resources Panel	48
Figure 6: The Define Type Properties Panel	49
Figure 7: The Define Element Data Panel	50
Figure 8: Define Message Properties panel	52
Figure 9: The Define Message Parts panel	53
Figure 10: The Define Message Parts panel, after clicking Add	53
Figure 11: The Define Port Type Properties panel	56
Figure 12: The Define Port Type Operations panel	56
Figure 13: The Define Operation Messages Panel	57
Figure 14: The Select Binding Type Panel	60
Figure 15: The Set Binding Defaults Panel	61
Figure 16: Edit Operation panel	61
Figure 17: Edit Operation panel, sayHi node selected	62
Figure 18: The Define Service Panel	63
Figure 19: The Define Port panel	64
Figure 20: The Define Port Properties panel	64
Figure 21: The Artix Tools panel	69
Figure 22: Artix Tools panel, General tab	70
Figure 23: Artix Tools panel, Generation tab	71
Figure 24: Artix Tools panel, WSDL Details tab	72
Figure 25: Eclipse Console View toolbar	81

## LIST OF FIGURES

# Preface

## What is Covered in this Book

*Getting Started with Artix* provides an introduction to IONA's Artix technology. It gives a brief overview of the architecture and functionality of Artix, and an introduction to Web Services Description Language (WSDL).

This book takes you through the process of creating a WSDL file and generating starting point code in both C++ and Java using the Artix Designer development tool.

This book also provides guidance for finding your way around the Artix product library.

## Who Should Read this Book

*Getting Started with Artix* is for anyone who needs to understand the concepts and terms used in IONA's Artix product.

## Organization of this Book

This book contains conceptual information about Artix and WSDL:

- [“Introduction” on page 1](#) introduces the Artix product and the types of problems it is designed to solve, and provides an introduction walkthrough of the Artix documentation library.
- [“Artix Concepts” on page 13](#) explains the main concepts used in Artix.
- [“Understanding WSDL” on page 21](#) explains the basics of WSDL.
- [“Using Artix Designer” on page 35](#) explains the basics of using the Artix GUI to edit Artix contracts and other Artix project artifacts.

## The Artix Library

The Artix documentation library is organized in the following sections:

- [Getting Started](#)
- [Designing and Developing Artix Solutions](#)
- [Configuring and Deploying Artix Solutions](#)
- [Using Artix Services](#)
- [Integrating Artix Solutions](#)
- [Integrating with Enterprise Management Systems](#)
- [Reference Documentation](#)

### **Getting Started**

The books in this section provide you with a background for working with Artix. They describe many of the concepts and technologies used by Artix. They include:

- [Release Notes](#) contains release-specific information about Artix.
- [Installation Guide](#) describes the prerequisites for installing Artix and the procedures for installing Artix on supported systems.
- [Getting Started with Artix](#) describes basic Artix and WSDL concepts.
- [Using Artix Designer](#) describes how to use Artix Designer to build Artix solutions.
- [Artix Technical Use Cases](#) provides a number of step-by-step examples of building common Artix solutions.

### **Designing and Developing Artix Solutions**

The books in this section go into greater depth about using Artix to solve real-world problems. They describe how Artix uses WSDL to define services, and how to use the Artix APIs to build new services. They include:

- [Building Service-Oriented Architectures with Artix](#) provides an overview of service-oriented architectures and describes how they can be implemented using Artix.
- [Understanding Artix Contracts](#) describes the components of an Artix contract. Special attention is paid to the WSDL extensions used to define Artix-specific payload formats and transports.
- [Developing Artix Applications in C++](#) discusses the technical aspects of programming applications using the C++ API.
- [Developing Advanced Artix Plug-ins in C++](#) discusses the technical aspects of implementing advanced plug-ins (for example, interceptors) using the C++ API.

- [Developing Artix Applications in Java](#) discusses the technical aspects of programming applications using the Java API.

### **Configuring and Deploying Artix Solutions**

This section includes:

- [Configuring and Deploying Artix Solutions](#) discusses how to configure and deploy Artix-enabled systems, and provides examples of typical use cases.

### **Using Artix Services**

The books in this section describe how to use the services provided with Artix:

- [Artix Locator Guide](#) discusses how to use the Artix locator.
- [Artix Session Manager Guide](#) discusses how to use the Artix session manager.
- [Artix Transactions Guide, C++](#) explains how to enable Artix C++ applications to participate in transacted operations.
- [Artix Transactions Guide, Java](#) explains how to enable Artix Java applications to participate in transacted operations.
- [Artix Security Guide](#) explains how to use the security features of Artix.

### **Integrating Artix Solutions**

The books in this section describe how to integrate Artix solutions with other middleware technologies:

- [Artix for CORBA](#) provides information on using Artix in a CORBA environment.
- [Artix for J2EE](#) provides information on using Artix to integrate with J2EE applications.

For details on integrating with Microsoft's .NET technology, see the documentation for Artix Connect.

### **Integrating with Enterprise Management Systems**

The books in this section describe how to integrate Artix solutions with a range of enterprise management systems. They include:

- [IBM Tivoli Integration Guide](#) explains how to integrate Artix with IBM Tivoli.

- [BMC Patrol Integration Guide](#) explains how to integrate Artix with BMC Patrol.
- [CA WSDM Integration Guide](#) explains how to integrate Artix with CA WSDM.

### Reference Documentation

These books provide detailed reference information about specific Artix APIs, WSDL extensions, configuration variables, command-line tools, and terminology. The reference documentation includes:

- [Artix Command Line Reference](#)
- [Artix Configuration Reference](#)
- [Artix WSDL Extension Reference](#)
- [Artix Java API Reference](#)
- [Artix C++ API Reference](#)
- [Artix .NET API Reference](#)
- [Artix Glossary](#)

### Getting the Latest Version

The latest updates to the Artix documentation can be found at <http://www.iona.com/support/docs>.

Compare the version dates on the web page for your product version with the date printed on the copyright page of the PDF edition of the book you are reading.

### Searching the Artix Library

You can search the online documentation by using the **Search** box at the top right of the documentation home page:

<http://www.iona.com/support/docs>

To search a particular library version, browse to the required index page, and use the **Search** box at the top right, for example:

<http://www.iona.com/support/docs/artix/4.0/index.xml>

You can also search within a particular book. To search within a HTML version of a book, use the **Search** box at the top left of the page. To search within a PDF version of a book, in Adobe Acrobat, select **Edit|Find**, and enter your search text.

## Artix Online Help

Artix Designer and the Artix Management Console include comprehensive online help, providing:

- Step-by-step instructions on how to perform important tasks
- A full search feature
- Context-sensitive help for each screen

There are two ways that you can access the online help:

- Select **Help|Help Contents** from the menu bar. Sections on Artix Designer and the Artix Management Console appear in the contents panel of the Eclipse help browser.
- Press **F1** for context-sensitive help.

In addition, there are a number of cheat sheets that guide you through the most important functionality in Artix Designer. To access these, select **Help|Cheat Sheets**.

## Artix Glossary

The [Artix Glossary](#) provides a comprehensive reference of Artix terminology. It provides quick definitions of the main Artix components and concepts. All terms are defined in the context of the development and deployment of Web services using Artix.

## Additional Resources

The [IONA Knowledge Base](#) contains helpful articles written by IONA experts about Artix and other products.

The [IONA Update Center](#) contains the latest releases and patches for IONA products.

If you need help with this or any other IONA product, go to [IONA Online Support](#).

Comments, corrections, and suggestions on IONA documentation can be sent to [docs-support@iona.com](mailto:docs-support@iona.com).

## Document Conventions

### Typographical conventions

This book uses the following typographical conventions:

<i>Fixed width</i>	<p>Fixed width (courier font) in normal text represents portions of code and literal names of items such as classes, functions, variables, and data structures. For example, text might refer to the <code>IT_Bus::AnyType</code> class.</p> <p>Constant width paragraphs represent code examples or information a system displays on the screen. For example:</p> <pre>#include &lt;stdio.h&gt;</pre>
<i>Fixed width italic</i>	<p>Fixed width italic words or characters in code and commands represent variable values you must supply, such as arguments to commands or path names for your particular system. For example:</p> <pre>% cd /users/<i>YourUserName</i></pre>
<i>Italic</i>	<p>Italic words in normal text represent <i>emphasis</i> and introduce <i>new terms</i>.</p>
<b>Bold</b>	<p>Bold words in normal text represent graphical user interface components such as menu commands and dialog boxes. For example: the <b>User Preferences</b> dialog.</p>

## Keying Conventions

This book uses the following keying conventions:

No prompt	When a command's format is the same for multiple platforms, the command prompt is not shown.
%	A percent sign represents the UNIX command shell prompt for a command that does not require root privileges.
#	A number sign represents the UNIX command shell prompt for a command that requires root privileges.
>	The notation > represents the MS-DOS or Windows command prompt.
...	Horizontal or vertical ellipses in format and syntax descriptions indicate that material has been eliminated to simplify a discussion.
[ ]	Brackets enclose optional items in format and syntax descriptions.
{ }	Braces enclose a list from which you must choose an item in format and syntax descriptions.
	In format and syntax descriptions, a vertical bar separates items in a list of choices enclosed in { } (braces).  In graphical user interface descriptions, a vertical bar separates menu commands (for example, select <b>File   Open</b> ).

## PREFACE

# Introduction

*This chapter introduces the main features of Artix, and describes where to look in the documentation for further information.*

**In this chapter**

---

This chapter discusses the following topics:

<a href="#">What is Artix?</a>	<a href="#">page 2</a>
<a href="#">Solving Problems with Artix</a>	<a href="#">page 7</a>
<a href="#">Using the Artix Documentation</a>	<a href="#">page 9</a>

---

# What is Artix?

## Overview

Artix is an extensible enterprise service bus (ESB). It provides the tools for rapid application integration that exploits the middleware technologies and the products already present within your enterprise.

The approach taken by Artix relies on existing Web service standards and extends these standards to provide rapid integration solutions that increase operational efficiencies, capitalize on existing infrastructure, and enable the adoption or extension of a service-oriented architecture (SOA).

---

## Web services and SOAs

The information services community generally regards Web services as application-to-application interactions that use SOAP over HTTP.

Web services have the following advantages:

- The data encoding scheme and transport semantics are based on standardized specifications.
- The XML message content is human readable.
- The contract defining the service is XML-based and can be edited by any text editor.
- They promote loosely coupled architectures.

Service-oriented architectures take the Web services concept and extend it to the entire enterprise. Using a service-oriented architecture, your infrastructure becomes a collection of loosely coupled services. Each service becomes an endpoint defined by a contract written in Web Services Description Language (WSDL). Clients, or service consumers, can then access the services by reading a service's contract.

---

## Artix and services

Using IONA's proven *Adaptive Runtime Technology* (ART), Artix extends the Web service standards to include more than just SOAP over HTTP. Thus, Artix allows organizations to define their existing applications as services without worrying about the underlying middleware. It also provides the ability to expose those applications across a number of middleware technologies without writing any new code.

Artix also provides developers with the tools to write new applications in C++ or Java that can be exposed as middleware-neutral services. These tools aid in the definition of the new service in WSDL and in the generation of stub and skeleton code.

Just like the WSDL contracts used to define a service, the code that Artix generates adheres to industry standards.

---

## Benefits of Artix

Artix's extensible nature provides a number of benefits compared to other ESB products and older enterprise application integration (EAI) products. Chief among these is its speed and flexibility. In addition, Artix provides enterprise levels of service such as session management, service discovery, security, and cross-middleware transaction propagation.


EAI products typically use a proprietary, canonical message format in a centralized EAI hub. When the hub receives a message, it transforms the message to this canonical format and then transforms the message to the format of the target application before sending it to its destination. Each application requires two adapters that are typically proprietary and that translate to and from the canonical format.

By contrast, the Artix bus does not require a hub architecture, nor does it use any intermediate message format. When a message is received by the bus, it is transformed directly into the target application's message format.

Because Artix uses a standardized means of defining its services, the plug-ins used to connect applications to the bus are reusable.

Figure 1 shows an example Artix integration between BEA Tuxedo and IBM WebSphere MQ.

**Figure 1:** *Artix High-Performance Architecture*

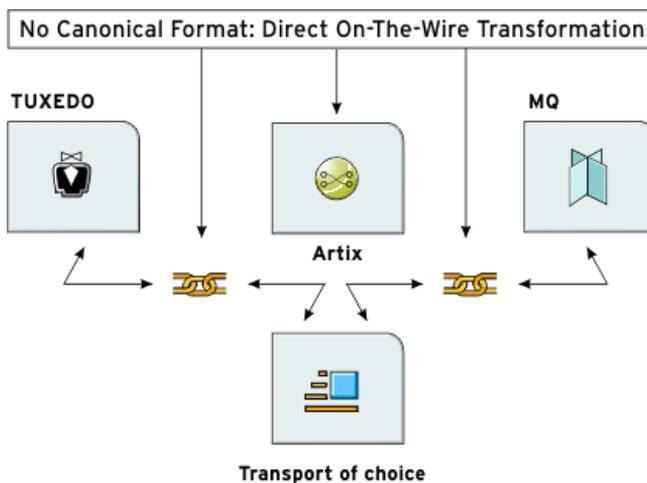

Because Artix is built on top of ART, it is modular in nature. This means that it is highly configurable and that it is easily extendable. You can configure Artix to only load the pieces you need for the functionality you require. If Artix does not provide a transport or message format you need, you can easily develop your own plug-in, extend the contract definitions, and configure Artix to load it.

## Using Artix

There are two ways to use Artix in your enterprise:

- You can use Artix to develop new applications using the Artix Application Programming Interface (API). In this situation, developers generate Artix stubs and skeletons from an Artix contract and Artix becomes a part of your development environment.
- You can use the Artix bus to integrate two existing applications, built on different middleware technologies, into a single application. In this situation, developers simply create an Artix contract defining the integration of the systems. In most cases, no new code is needed.

---

**Becoming proficient with Artix**

To become an effective Artix developer you need an understanding of the following:

1. The syntax for WSDL files and the Artix extensions to the WSDL specification.
2. The relationship between Artix WSDL extensions, ART plug-ins, and setting configuration entries.
3. The Artix APIs that you can use in your application.
4. Artix Designer, a GUI tool that enables you to write, generate, and edit WSDL files, and to generate, compile, and run code.

This book introduces these four concepts. The other books in the Artix documentation library covers the same technologies in greater detail.

---

**Artix features**

Artix includes the following unique features:

- Support for multiple transports and message data formats
- C++ and Java development
- Message routing
- Cross-middleware transaction support
- Asynchronous Web services
- Deployment of services as plug-ins via the Artix container
- Role-based security, single sign-on, and security integration
- Session management and stateful Web services
- Look-up services
- Load-balancing
- High-availability service clustering
- Integration with EJBs
- Easy-to-use development tools
- Support for Microsoft .NET
- Integration with enterprise management tools such as IBM Tivoli and BMC Patrol
- Support for XSLT-based message transformation
- No need to hard code WSDL references into applications

---

### Supported transports and protocols

A *transport* is an on-the-wire format for messages; whereas a *protocol* is a transport that is defined by an open specification. For example, MQ and Tuxedo are transports, while HTTP and IIOP are protocols.

In Artix, both protocols and transports are referred to as transports. Artix supports the following message transports:

- HTTP
- BEA Tuxedo
- IBM WebSphere MQ (formerly MQSeries)
- TIBCO Rendezvous™
- IIOP
- CORBA
- Java Messaging Service

---

### Supported payload formats

A *payload format* defines the layout of a message delivered over a transport. Artix can automatically transform between the following payload formats:

- CORBA Common Data Representation (CDR)
- G2++
- Fixed record length (FRL)
- SOAP
- Pure XML
- Tagged (variable record length)
- TibrvMsg (a TIBCO Rendezvous format)
- Tuxedo's Field Manipulation Language (FML)

---

### Further information

For more information about supported transports and payload formats, see [Designing Artix Solutions](#).

For information about Artix mainframe support, see the documentation for Artix for z/OS, available at <http://www.iona.com/support/docs/index.xml>.

---

# Solving Problems with Artix

---

## Overview

Artix enables you to easily solve problems arising from the integration of existing back-end systems using a service-oriented approach. Artix enables you to develop new services using C++ or Java, and to retain all of the enterprise levels of service that you require.

In general, there are three phases to an Artix project:

1. The design phase, where you define your services and define how they are integrated using Artix contracts.
2. The development phase, where you write the application code required to implement new services.
3. The deployment phase, where you configure and deploy your Artix solution.

---

## Design phase

In the design phase, you define the logical layout of your system in an Artix contract. The logical or abstract definition of a system includes: the services that it contains, the operations each service offers, and the data the services will use to exchange information.

Once you have defined the logical aspects of your system, you then add the physical network details to the contracts.

The physical details of your system include the transports and payload formats used by your services, as well as any routing schemes needed to connect services that use different transports or payload formats.

Artix Designer and the Artix command-line tools automate the mapping of your service descriptions into WSDL-based Artix contracts. These tools enable you to:

- Import existing WSDL documents
- Create Artix contracts from scratch
- Generate Artix contracts from:
  - ◆ CORBA IDL
  - ◆ A description of tagged data
  - ◆ A description of fixed record length data
  - ◆ A COBOL copybook

- ◆ A Java class
  - Add the following bindings to an Artix contract:
    - ◆ CORBA
    - ◆ Fixed record length
    - ◆ SOAP
    - ◆ Tagged data
    - ◆ XML
- 

### Development phase

You need to write Artix application code if your solution involves creating new applications or a custom router, or involves using the locator or session management features. The first step in writing Artix code is to generate client stub code and server skeleton code from the Artix contracts that you created in the design phase. You can generate this code using Artix Designer or the Artix command-line tools.

After you have generated the client stub code and server skeleton code, you can develop the code that implements the business logic you require. For most applications, Artix-generated code allows you to stick to using standard C++ or Java code for writing business logic.

Artix Designer is integrated with the open-source Eclipse application framework, but you are not required to use Eclipse for the whole project. Once the stub code is generated, you can switch to your favorite development environment to develop and debug the application code.

Artix also provides advanced APIs for directly manipulating messages, for writing message handlers, and for other advanced features your application might require. These can be plugged into the Artix runtime for customized processing of messages.

---

### Deployment phase

In the deployment phase, you configure the Artix runtime to fine-tune the Artix bus for your new Artix system. This involves modifying the Artix configuration files and editing the Artix contracts that describe your solution to fit the exact circumstances of your deployment environment.

This phase also includes the managing of the deployed system. This might involve, for example, using an enterprise management tool such as Tivoli along with the Artix command interface. These tools allow you to further fine-tune your system.

---

# Using the Artix Documentation

---

## Overview

The Artix library consists of a number of guides to help you use Artix. The guides are organized in groups that reflect the three phases of Artix problem solving. This section gives a brief overview of each guide and suggests an order in which to read the library.

---

## If you are new to Artix

If you are approaching Artix for the first time, work through the library in the following order:

1. *Getting Started with Artix* (this book)
2. [Using Artix Designer](#)
3. [Artix Technical Use Cases](#)
4. [Building Service Oriented Infrastructures with Artix](#)
5. [Understanding Artix Contracts](#)
6. [Developing Artix Applications in C++](#), or  
[Developing Artix Applications in Java](#)
7. [Deploying and Managing Artix Solutions](#)

In addition, the following publications provide useful background information:

- *Understanding Web Services: XML, WSDL, SOAP, and UDDI*, by Eric Newcomer
  - *Understanding SOA with Web Services*, by Eric Newcomer and Greg Lomow
  - The W3C XML Schema page at [www.w3.org/XML/Schema](http://www.w3.org/XML/Schema)
  - THE W3C WSDL specification at [www.w3.org/TR/wsdl](http://www.w3.org/TR/wsdl)
- 

## Designing Artix solutions

The design and planning section of the library has two guides:

- [Building Service Oriented Infrastructures with Artix](#)
- [Understanding Artix Contracts](#)

*Building Service Oriented Infrastructures with Artix* introduces service oriented architectures (SOA), and provides an overview of the ways Artix can facilitate the deployment of an enterprise quality SOA. It uses concrete use cases to illuminate the value of a SOA, then provides a bird's eye view of the distributed, extensible architecture of Artix.

*Understanding Artix Contracts* discusses how to describe your services and their integration using Artix contracts, and describes in detail the Artix extensions to WSDL that are used to describe non-SOAP payload formats, transports, and routing rules.

---

## Developing Artix applications

The Artix documentation suite includes three primary development guides:

- [Developing Artix Applications in C++](#)
- [Developing Artix Applications in Java](#)
- [Developing Advanced Artix Plug-Ins in C++](#)

Both of the *Developing Artix Applications* guides describe how to develop clients, servers, and container plug-ins using the Artix APIs. They discuss how the Artix code generators map XML Schema types to code and show how to work with the generated types.

The Java guide also explains how to develop message handlers, plug-ins, and custom message transports. For C++ developers, this material is covered in the *Developing Advanced Artix Plug-Ins* guide.

In addition to the primary developer guides, the Artix documentation suite includes:

- [Java API](#) reference material in JavaDoc format
- [C++ API](#) reference material in Doxygen format
- [Microsoft .NET](#) documentation in Ndoc format

---

## Deploying and managing Artix solutions

[Configuring and Deploying Artix Solutions](#) explains how to configure and deploy Artix services in a runtime environment. It describes the Artix configuration file, where to locate the contracts that control your Artix services, and how to start and run Artix applications.

The [Artix Configuration Reference](#) provides a comprehensive reference for the configuration variables in an Artix configuration domain.

In addition, the [IONA Tivoli Integration Guide](#), the [IONA BMC Patrol Integration Guide](#), and the [Artix CA WSDM Integration Guide](#) explain Artix integration with third-party enterprise management systems.

Lastly, Artix provides the [Artix Security Guide](#) for security configuration and management.

---

**Latest updates**

The latest updates to the Artix 4.0 documentation can be found at: <http://www.ionas.com/support/docs/artix/4.0/index.xml>.



# Artix Concepts

*This chapter introduces the key concepts used in the Artix product.*

**In this chapter**

---

This chapter discusses the following topics:

<a href="#">The Artix Runtime Components</a>	<a href="#">page 14</a>
<a href="#">The Artix Bus</a>	<a href="#">page 15</a>
<a href="#">Artix Endpoints</a>	<a href="#">page 16</a>
<a href="#">Artix Contracts</a>	<a href="#">page 17</a>
<a href="#">Artix Services</a>	<a href="#">page 19</a>

---

# The Artix Runtime Components

---


## How it fits together

Artix is comprised of a group of components that are built on the Adaptive Runtime Technology (ART) platform:

- [The Artix Bus](#) is at the core of Artix, and provides the transport and payload format support.
- [Artix Contracts](#) describe your applications in such a way that they become services that can be deployed as [Artix Endpoints](#).
- [Artix Services](#) include a number of advanced services, such as the locator and session manager. Each Artix service is defined with an Artix contract and can be deployed as an Artix endpoint.

[Figure 2](#) illustrates how the Artix elements fit together.

**Figure 2:** *Artix Runtime Components*

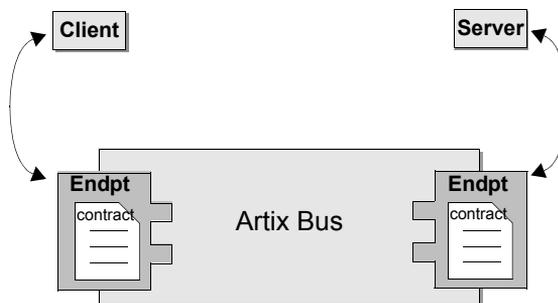

---

## Plugability

Because Artix is built on ART, all Artix services are implemented as plug-ins. You can also deploy your own services as plug-ins. This means that you can host any Artix service either as a standalone application or as a plug-in to another Artix application.

Each separate service, regardless of how it is deployed, becomes a separate endpoint.

---

# The Artix Bus

---

## Overview

The Artix bus is at the heart of the Artix architecture. It is the component that hosts the services that you create and connects your applications to those services.

The bus is also responsible for translating data from one format into another. This translation process works as follows:

1. Reader plug-ins accept incoming data in one format.
2. The Artix bus directly translates the data into another format.
3. Writer plug-ins write the data back out to the wire in the new format.

In this way, Artix enables all of the services in your company to communicate, without needing to communicate in the same way. It also means that clients can contact services without understanding the native language of the server handling requests.

---

## Benefits

While other products provide some ability to expose applications as services, they frequently require a good deal of coding. The Artix bus eliminates the need to modify your applications or write code by directly translating the application's native communication protocol into any of the other supported protocols.

For example, by deploying an Artix instance with a SOAP-over-WebSphere MQ endpoint and a SOAP-over-HTTP endpoint, you can expose a WebSphere MQ application directly as a Web service. The WebSphere MQ application does not need to be altered or made aware that it was being exposed using SOAP over HTTP.

The Artix bus translation facility also makes it a powerful integration tool. Unlike traditional EAI products, Artix translates directly between different middlewares without first translating into a canonical format. This saves processing overhead and increases the speed at which messages are transmitted.

---

# Artix Endpoints

---

## Overview

An Artix endpoint is where a service or a service consumer connects to the Artix bus. Endpoints are described by a contract describing the services offered and the physical representation of the data on the network.

---

## Reconfigurable connection

An Artix endpoint provides an abstract connection point between applications, as shown in [Figure 2 on page 14](#). The benefit of using this abstract connection is that it allows you to change the underlying communication mechanisms without recoding any of your applications. You simply need to modify the contract describing the endpoint.

For example, if one of your back-end service providers is a Tuxedo application and you want to swap it for a CORBA implementation, you simply change the endpoint's contract to contain a CORBA connection to the Artix bus. The clients accessing the back-end service provider do not need to be aware of the change.

---

# Artix Contracts

---

## Overview

Artix contracts are written in WSDL. In this way, a standard language is used to describe the characteristics of services and their associated Artix endpoints. By defining characteristics such as service operations and messages in an abstract way—independent of the transport or protocol used to implement the endpoint—these characteristics can be bound to a variety of protocols and formats.

Artix allows an abstract definition to be bound to multiple specific protocols and formats. This means that the same definitions can be reused in multiple implementations of a service. Artix contracts define the services exposed by a set of systems, the payload formats and transports available to each system, and the rules governing how the systems interact with each other. The simplest Artix contract defines a pair of systems with a shared interface, payload format, and transport. Artix contracts, however, can define very complex integration scenarios.

---

## WSDL elements

Understanding Artix contracts requires some familiarity with WSDL. The key WSDL elements are as follows:

**WSDL types** provide data type definitions used to describe messages.

**A WSDL message** is an abstract definition of the data being communicated. Each part of a message is associated with a defined type.

**A WSDL operation** is an abstract definition of the capabilities supported by a service, and is defined in terms of input and output messages.

**A WSDL portType** is a set of abstract operation descriptions.

**A WSDL binding** associates a specific data format for operations defined in a `portType`.

**A WSDL port** specifies the transport details for a binding, and defines a single communication endpoint.

**A WSDL service** specifies a set of related ports.

## The Artix contract

An Artix contract is specified in WSDL and is conceptually divided into logical and physical components.

### The logical contract

The logical contract specifies components that are independent of the underlying transport and wire format. It fully specifies the data structure and the possible operations or interactions with the interface. It enables Artix to generate skeletons and stubs without having to define the physical characteristics of the connection (transport and wire format).

The logical contract includes the `types`, `message`, `operation`, and `portType` elements of the WSDL file.

### The physical contract

The physical component of an Artix contract defines the format and transport-specific details. For example:

- The wire format, middleware transport, and service groupings
- The connection between the `portType` operations and wire formats
- Buffer layout for fixed formats
- Artix extensions to WSDL

The physical contract includes the `binding`, `port`, and `service` elements of the WSDL file.

---

# Artix Services

---

## Overview

In addition to the core Artix components, Artix also provides the following services:

- [Container](#)
- [Locator](#)
- [Session manager](#)
- [Transformer](#)
- [Accessing contracts and references](#)

These services provide advanced functionality that Artix deployments can use to gain even more flexibility.

---

## Container

The Artix container provides a consistent mechanism for deploying and managing Artix services. It allows you to write Web service implementations as Artix plug-ins and then deploy your services into the Artix container.

Using the container eliminates the need to write your own C++ or Java server mainline. Instead, you can deploy your service by simply passing the location of a generated deployment descriptor to the Artix container's administration client.

IONA strongly recommends that all new client and server Artix implementations be implemented and deployed in an Artix container.

---

## Locator

The Artix locator provides service look-up and load balancing functionality to an Artix deployment. It isolates clients from changes in a server's contact information.

The Artix WSDL contract defines how the client contacts the server, and contains the address of the Artix locator. The locator provides the client with a reference to the server.

Servers are automatically registered with the locator when they start, and service endpoints are automatically made available to clients without the need for additional coding.

---

**Session manager**

The Artix session manager is a group of plug-ins that work together to manage the number of concurrent clients that access a group of services. This enables you to control how long each client can use the services in the group before having to check back with the session manager.

In addition, the session manager has a pluggable policy callback mechanism that enables you to implement your own session management policies.

---

**Transformer**

The Artix transformer provides Artix with a way to transform operation parameters on the wire using rules written in Extensible Style Sheet Transformation (XSLT) scripts. The transformer can be used to provide a simple means of transforming data. For example, it can be used to develop an application that accepts names as a single string and returns them as separate first and last name strings.

The transformer can also be placed between two applications where it can transform messages as they pass between the applications. This functionality allows you to connect applications that do not use exactly the same interfaces and still realize the benefits of not using a canonical format without rewriting the underlying applications.

---

**Accessing contracts and references**

Accessing contracts and references in Artix refers to enabling client and server applications to find WSDL service contracts and references. Using the techniques and conventions of Artix avoids the need to hard code WSDL into your client and server applications.

---

**For more information**

For more information on Artix services, see *Configuring and Deploying Artix Solutions*.

# Understanding WSDL

*Artix contracts use WSDL documents to describe services and the data they use.*

---

**In this chapter**

This chapter discusses the following topics:

<a href="#">WSDL Basics</a>	<a href="#">page 22</a>
<a href="#">Abstract Data Type Definitions</a>	<a href="#">page 25</a>
<a href="#">Abstract Message Definitions</a>	<a href="#">page 28</a>
<a href="#">Abstract Interface Definitions</a>	<a href="#">page 31</a>
<a href="#">Mapping to the Concrete Details</a>	<a href="#">page 34</a>

---

# WSDL Basics

---

## Overview

Web Services Description Language (WSDL) is an XML document format used to describe services offered over the Web. WSDL is standardized by the World Wide Web Consortium (W3C) and is currently at revision 1.1. You can find the standard on the W3C website at [www.w3.org/TR/wsdl](http://www.w3.org/TR/wsdl).

---

## Elements of a WSDL document

A WSDL document is made up of the following elements:

- `import` allows you to import another WSDL or XSD file.
- Logical contract elements:
  - ◆ `types`
  - ◆ `message`
  - ◆ `operation`
  - ◆ `portType`
- Physical contract elements:
  - ◆ `binding`
  - ◆ `port`
  - ◆ `service`

These elements are described in “WSDL elements” on page 17.

---

## Abstract operations

The abstract definition of *operations* and *messages* is separated from the concrete data formatting definitions and network protocol details. As a result, the abstract definitions can be reused and recombined to define several endpoints. For example, a service can expose identical operations with slightly different concrete data formats and two different network addresses. Alternatively, one WSDL document could be used to define several services that use the same abstract messages.

---

## The portType

A *portType* is a collection of abstract operations that define the actions provided by an endpoint.

---

**Concrete details**

When a portType is mapped to a concrete data format, the result is a concrete representation of the abstract definition, in the form of reusable *binding*. A *port* is defined by associating a network address with a reusable binding, in the form of an endpoint. A collection of ports (or endpoints) define a service.

Because WSDL was intended to describe services offered over the Web, the concrete message format is typically SOAP and the network protocol is typically HTTP. However, WSDL documents can use any concrete message format and network protocol. In fact, Artix contracts bind operations to several data formats and describe the details for a number of network protocols.

---

**Namespaces and imported descriptions**

WSDL supports the use of XML namespaces defined in the `definition` element as a way of specifying predefined extensions and type systems in a WSDL document. WSDL also supports importing WSDL documents and fragments for building modular WSDL collections.

---

**Example**

[Example 1](#) shows a simple WSDL document.

**Example 1: Simple WSDL example**

```
<definitions name="HelloWorld.wsdl"
  targetNamespace="http://www.iona.com/artix/HelloWorld"
  xmlns="http://schemas.xmlsoap.org/wsdl/"
  xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
  xmlns:tns="http://www.iona.com/artix/HelloWorld"
  xmlns:wSDL="http://schemas.xmlsoap.org/wsdl/"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <types>
    <schema
      targetNamespace="http://www.iona.com/artix/HelloWorld"
      xmlns="http://www.w3.org/2001/XMLSchema">
      <element name="InElement" type="string"/>
      <element name="OutElement" type="string"/>
    </schema>
  </types>
```

**Example 1:** *Simple WSDL example (Continued)*

```

<message name="RequestMessage">
  <part element="tns:InElement" name="InPart"/>
</message>
<message name="ResponseMessage">
  <part element="tns:OutElement" name="OutPart"/>
</message>
<portType name="HelloWorldPT">
  <operation name="sayHi">
    <input message="tns:RequestMessage"
      name="sayHiRequest"/>
    <output message="tns:ResponseMessage"
      name="sayHiResponse"/>
  </operation>
</portType>
<binding name="HelloWorldPTSOAPBinding"
  type="tns:HelloWorldPT">
  <soap:binding style="document"
    transport="http://schemas.xmlsoap.org/soap/http"/>
  <operation name="sayHi">
    <soap:operation soapAction="" style="document"/>
    <input name="sayHiRequest">
      <soap:body use="literal"/>
    </input>
    <output name="sayHiResponse">
      <soap:body use="literal"/>
    </output>
  </operation>
</binding>
<service name="HelloWorldService">
  <port binding="tns:HelloWorldPTSOAPBinding"
    name="HelloWorldPort">
    <soap:address
      location="http://localhost:9000/HelloWorldService/
        HelloWorldPort"/>
  </port>
</service>
</definitions>

```

---

# Abstract Data Type Definitions

---

## Overview

Applications typically use data types that are more complex than the primitive types, like `int`, defined by most programming languages. WSDL documents represent these complex data types using a combination of schema types defined in referenced external XML schema documents and complex types described in `types` elements.

---

## Complex type definitions

Complex data types are described in a `types` element. The W3C specification states that XSD is the preferred canonical type system for a WSDL document. Therefore, XSD is treated as the intrinsic type system. Because these data types are abstract descriptions of the data passed over the wire and not concrete descriptions, there are a few guidelines on using XSD schemas to represent them:

- Use elements, not attributes.
- Do not use protocol-specific types as base types.
- Define arrays using the SOAP 1.1 array encoding format.

WSDL does allow for the specification and use of alternative type systems within a document.

---

## Example

The structure, `personalInfo`, defined in [Example 2](#), contains a `string`, an `int`, and an `enum`. The `string` and the `int` both have equivalent XSD types and do not require special type mapping. The enumerated type `hairColorType`, however, does need to be described in XSD.

### Example 2: *personalInfo* structure

```
enum hairColorType {red, brunette, blonde};

struct personalInfo
{
    string name;
    int age;
    hairColorType hairColor;
}
```

**Example 3** shows one mapping of `personalInfo` into XSD. This mapping is a direct representation of the data types defined in **Example 2**.

`hairColorType` is described using a named `simpleType` because it does not have any child elements. `personalInfo` is defined as an `element` so that it can be used in messages later in the contract.

**Example 3:** XSD type definition for `personalInfo`

```
<types>
  <xsd:schema targetNamespace="http://iona.com/personal/schema"
    xmlns:xsd="http://iona.com/personal/schema" xmlns="http://
    www.w3.org/2000/10/XMLSchema"/>
    <simpleType name="hairColorType">
      <restriction base="xsd:string">
        <enumeration value="red"/>
        <enumeration value="brunette"/>
        <enumeration value="blonde"/>
      </restriction>
    </simpleType>
    <element name="personalInfo">
      <complexType>
        <sequence>
          <element name="name" type="xsd:string"/>
          <element name="age" type="xsd:int"/>
          <element name="hairColor" type="xsd:hairColorType"/>
        </sequence>
      </complexType>
    </element>
  </types>
```

Another way to map `personalInfo` is to describe `hairColorType` in-line as shown in **Example 4**. With this mapping, however, you cannot reuse the description of `hairColorType`.

**Example 4:** Alternate XSD Mapping for `personalInfo`

```
<types>
  <xsd:schema targetNamespace="http://iona.com/personal/schema"
    xmlns:xsd="http://iona.com/personal/schema" xmlns="http://
    www.w3.org/2000/10/XMLSchema"/>
    <element name="personalInfo">
      <complexType>
        <sequence>
          <element name="name" type="xsd:string"/>
          <element name="age" type="xsd:int"/>
        </sequence>
      </complexType>
    </element>
  </types>
```

**Example 4:** *Alternate XSD Mapping for personInfo (Continued)*

```
<element name="hairColor">
  <simpleType>
    <restriction base="xsd:string">
      <enumeration value="red"/>
      <enumeration value="brunette"/>
      <enumeration value="blonde"/>
    </restriction>
  </simpleType>
</element>
</sequence>
</complexType>
</element>
</types>
```

---

# Abstract Message Definitions

---

## Overview

WSDL is designed to describe how data is passed over a network. It describes data that is exchanged between two endpoints in terms of abstract messages described in `message` elements.

Each abstract message consists of one or more parts, defined in `part` elements.

These abstract messages represent the parameters passed by the operations defined by the WSDL document and are mapped to concrete data formats in the WSDL document's `binding` elements.

---

## Messages and parameter lists

For simplicity in describing the data consumed and provided by an endpoint, WSDL documents allow abstract operations to have only one input message, the representation of the operation's incoming parameter list, and only one output message, the representation of the data returned by the operation.

In the abstract message definition, you cannot directly describe a message that represents an operation's return value. Therefore, any return value must be included in the output message.

Messages allow for concrete methods defined in programming languages like C++ to be mapped to abstract WSDL operations. Each message contains a number of `part` elements that represent one element in a parameter list.

Therefore, all of the input parameters for a method call are defined in one message and all of the output parameters, including the operation's return value, are mapped to another message.

---

## Example

For example, imagine a server that stores personal information as defined in [Example 2 on page 25](#) and provides a method that returns an employee's data based on an employee ID number.

The method signature for looking up the data would look similar to [Example 5](#).

**Example 5:** *Method for Returning an Employee's Data*

```
personalInfo lookup(long empId)
```

This method signature could be mapped to the WSDL fragment shown in [Example 6](#).

**Example 6:** *WSDL Message Definitions*

```
<message name="personalLookupRequest">
  <part name="empId" type="xsd:int" />
</message>
<message name="personalLookupResponse">
  <part name="return" element="xsd:personalInfo" />
</message>
```

## Message naming

Each message in a WSDL document must have a unique name within its namespace. Choose message names that show whether they are input messages (requests) or output messages (responses).

## Message parts

Message parts are the formal data elements of the abstract message. Each part is identified by a `name` attribute and by either a `type` or an `element` attribute that specifies its data type. The data type attributes are listed in [Table 1](#).

**Table 1:** *Part Data Type Attributes*

Attribute	Description
<code>type="type_name"</code>	The datatype of the part is defined by a <code>simpleType</code> or <code>complexType</code> called <code>type_name</code>
<code>element="elem_name"</code>	The datatype of the part is defined by an <code>element</code> called <code>elem_name</code> .

Messages are allowed to reuse part names. For instance, if a method has a parameter, `foo`, which is passed by reference or is an in/out, it can be a part in both the request message and the response message. An example of parameter reuse is shown in [Example 7](#).

**Example 7:** *Reused Part*

```
<message name="fooRequest">  
  <part name="foo" type="xsd:int"/>  
</message>  
<message name="fooReply">  
  <part name="foo" type="xsd:int"/>  
</message>
```

---

# Abstract Interface Definitions

---

**Overview**

WSDL `portType` elements define, in an abstract way, the operations offered by a service. The operations defined in a port type list the input, output, and any fault messages used by the service to complete the transaction the operation describes.

---

**Port types**

A `portType` can be thought of as an interface description. In many Web service implementations there is a direct mapping between port types and implementation objects. Port types are the abstract unit of a WSDL document that is mapped into a concrete binding to form the complete description of what is offered over a port.

Port types are described using the `portType` element in a WSDL document. Each port type in a WSDL document must have a unique name, specified using the `name` attribute, and is made up of a collection of operations, described in `operation` elements. A WSDL document can describe any number of port types.

---

**Operations**

Operations, described in `operation` elements in a WSDL document, are an abstract description of an interaction between two endpoints. For example, a request for a checking account balance and an order for a gross of widgets can both be defined as operations.

Each operation within a port type must have a unique name, specified using the required `name` attribute.

---

**Elements of an operation**

Each operation is made up of a set of elements. The elements represent the messages communicated between the endpoints to execute the operation.

The elements that can describe an operation are listed in [Table 2](#).

**Table 2:** *Operation Message Elements*

Element	Description
<code>input</code>	Specifies a message that is received from another endpoint. This element can occur at most once for each operation.

**Table 2:** *Operation Message Elements (Continued)*

Element	Description
output	Specifies a message that is sent to another endpoint. This element can occur at most once for each operation.
fault	Specifies a message used to communicate an error condition between the endpoints. This element is not required and can occur an unlimited number of times.

An operation is required to have at least one `input` or `output` element. The elements are defined by two attributes listed in [Table 3](#).

**Table 3:** *Attributes of the Input and Output Elements*

Attribute	Description
name	Identifies the message so it can be referenced when mapping the operation to a concrete data format. The name must be unique within the enclosing port type.
message	Specifies the abstract message that describes the data being sent or received. The value of the <code>message</code> attribute must correspond to the <code>name</code> attribute of one of the abstract messages defined in the WSDL document.

It is not necessary to specify the `name` attribute for all input and output elements; WSDL provides a default naming scheme based on the enclosing operation's name.

If only one element is used in the operation, the element name defaults to the name of the operation. If both an `input` and an `output` element are used, the element name defaults to the name of the operation with `Request` or `Response` respectively appended to the name.

## Return values

Because the port type is an abstract definition of the data passed during an operation, WSDL does not provide for return values to be specified for an operation. If a method returns a value, it is mapped into the output message as the last part of that message. The concrete details of how the message parts are mapped into a physical representation are described in [“Bindings” on page 34](#).

**Example**

For example, in implementing a server that stores personal information in the structure defined in [Example 2 on page 25](#), you might use an interface similar to the one shown in [Example 8](#).

**Example 8:** *personalInfo Lookup Interface*

```
interface personalInfoLookup
{
    personalInfo lookup(in int empID)
    raises(idNotFound);
}
```

This interface could be mapped to the port type in [Example 9](#).

**Example 9:** *personalInfo Lookup Port Type*

```
<types>
...
  <element name="idNotFound" type="idNotFoundType">
    <complexType name="idNotFoundType">
      <sequence>
        <element name="ErrorMsg" type="xsd:string"/>
        <element name="ErrorID" type="xsd:int"/>
      </sequence>
    </complexType>
  </types>
<message name="personalLookupRequest">
  <part name="empId" type="xsd:int" />
</message>
<message name="personalLookupResponse">
  <part name="return" element="xsdl:personalInfo" />
</message>
<message name="idNotFoundException">
  <part name="exception" element="xsdl:idNotFound" />
</message>
<portType name="personalInfoLookup">
  <operation name="lookup">
    <input name="empID" message="personalLookupRequest" />
    <output name="return" message="personalLookupResponse" />
    <fault name="exception" message="idNotFoundException" />
  </operation>
</portType>
```

---

# Mapping to the Concrete Details

---

## Overview

The abstract definitions in a WSDL document are intended to be used in defining the interaction of real applications that have specific network addresses, use specific network protocols, and expect data in a particular format. To fully define these real applications, the abstract definitions discussed in the previous section must be mapped to concrete representations of the data passed between applications. The details describing the network protocols in use must also be added.

This is accomplished in the WSDL `bindings` and `ports` elements. WSDL binding and port syntax is not tightly specified by the W3C. A specification is provided that defines the mechanism for defining these syntaxes. However, the syntaxes for bindings other than SOAP and for network transports other than HTTP are not defined in a W3C specification.

---

## Bindings

Bindings describe the mapping between the abstract messages defined for each port type and the data format used on the wire. Bindings are described in `binding` elements in the WSDL file. A binding can map to only one port type, but a port type can be mapped to any number of bindings.

It is within the bindings that you specify details such as parameter order, concrete data types, and return values. For example, a binding can reorder the parts of a message to reflect the order required by an RPC call. Depending on the binding type, you can also identify which of the message parts, if any, represent the return type of a method.

---

## Services

To define an endpoint that corresponds to a running service, the `port` element in the WSDL file associates a binding with the concrete network information needed to connect to the remote service described in the file. Each port specifies the address and configuration information for connecting the application to a network.

Ports are grouped within `service` elements. A service can contain one or many ports. The convention is that the ports defined within a particular service are related in some way. For example all of the ports might be bound to the same port type, but use different network protocols, like HTTP and WebSphere MQ.

# Using Artix Designer

*This chapter introduces Artix Designer, and outlines how you can use it to build a WSDL file and to generate starting point code.*

---

## In this chapter

This chapter discusses the following topics:

<a href="#">Introduction</a>	<a href="#">page 36</a>
<a href="#">Creating Artix Designer Projects</a>	<a href="#">page 42</a>
<a href="#">Creating a WSDL File</a>	<a href="#">page 44</a>
<a href="#">Defining the WSDL Elements</a>	<a href="#">page 46</a>
<a href="#">Developing the Applications</a>	<a href="#">page 67</a>
<a href="#">Adding Logic to the Code</a>	<a href="#">page 74</a>
<a href="#">Running the Applications</a>	<a href="#">page 80</a>

---

# Introduction

---

## Overview

Artix Designer is a GUI development tool that ships as a series of plug-ins to the Eclipse platform. Eclipse is an open source development platform and application framework for building software, as described at [eclipse.org](http://eclipse.org).

Artix Designer enables you to write and edit the WSDL files that describe Artix resources and their integration, and to generate starting point code for a Web service. Artix Designer also includes perspectives that enable you to work with Artix for z/OS and Artix database projects, and to use the Artix Management Console to manage deployed Artix services.

---

## Generating WSDL

Artix Designer features a number of wizards that enable you to create WSDL files based on:

- CORBA IDL files
  - Java classes
  - XSD schemas
  - Fixed record-length data
  - Tagged data
  - COBOL copybook files
- 

## Using the WSDL editor

Although there are other XML editors that you can use to write WSDL, Artix Designer has an understanding of the Artix WSDL extensions and provides an automated way to write the WSDL files used in an Artix application. For example, Artix Designer automatically adds the required namespace declarations and prefix definitions when you build Artix applications that involve other data marshalling schemas, transport protocols, or routing.

The Artix Designer WSDL editor provides a number of wizards that take you through the process of creating and editing `type`, `message`, `portType`, `binding`, `service`, and `route` elements in your WSDL files.

See “[Defining the WSDL Elements](#)” on page 46 for more on using the WSDL editing wizards.

---

## Generating code

Artix Designer's code generation tool is integrated with the Artix command-line tools, such as `wSDLtoC++` and `wSDLtoJava`, so that you can use it to generate starting point code in C++ and Java based on your WSDL files.

In addition, integration with the Eclipse Java Development Tools (JDT) and C/C++ Development Tools (CDT) means that any code you create is compiled automatically after you generate it, and is recompiled when you make any changes to your source.

**Note:** The **Build Automatically** option must be enabled in the Eclipse **Project** menu for code to be compiled automatically.

The Artix code generator allows you to create a variety of code generation configurations, which you can save and reuse. For example, you can create configurations for:

- client and server applications
- Artix switch applications
- CORBA IDL
- Artix service plug-ins
- Container applications for hosting service plug-ins

See [“Developing the Applications” on page 67](#) for an example of the Artix code generator at work.

---

## Artix for z/OS Off-Host Components

Starting with Artix 4.0, the off-host components of the Artix for z/OS product are included with the base configuration of Artix Designer. These off-host components are designed to be used in conjunction with the mainframe components of Artix for z/OS, which are separately licensed.

---

## Launching Artix Designer

To launch Artix Designer in Windows, select **Start | (All) Programs | IONA | Artix 4.0 | Artix Designer**.

To launch Artix Designer in Linux:

1. Change to the following directory:

```
InstallDir/artix/4.0/bin
```

2. Run the following command:

```
./start_eclipse
```

The Eclipse platform launches with the Artix Designer plug-ins loaded.

**Note:** You can install Artix Designer into an existing Eclipse 3.1.x installation, as described in “Configuring Eclipse for Artix Designer” in the [Artix 4.0 Installation Guide](#).

---

### Artix Designer project types

In Eclipse, all development is performed within a project. Artix Designer provides the following project types:

- Basic Web services projects, either empty or template-based
- CORBA Web services projects
- Database Web services projects
- Web services projects from EJB
- z/OS Web services projects starting from an application
- z/OS Web services projects starting from WSDL

A CORBA Web services project creates a WSDL file and a switch configuration based on a CORBA IDL data source.

---

### Artix Designer project templates

Artix Designer requires you to specify a template when creating a new Web services project. The template sets up files and a directory structure for you.

The empty project template creates an Eclipse `.project` file and the directory structure that you are likely to use when developing your Web services project.

The other project templates create all the starting point code and configuration information needed for your Web services application.

Artix Designer provides the following templates:

- Empty project
- Artix router
- C++ client
- C++ client and container
- C++ client and server
- C++ container

- C++ server
- Java client
- Java client and container
- Java client and server
- Java container
- Java server

**Note:** You must have a valid WSDL file ready before you can create a Web services project from a template other than the empty project template.

---

### Artix-related perspectives

In the Eclipse development framework, a perspective is a predefined layout of the windows, views, menus, and tools in the Eclipse window. The following Artix-related perspectives are shipped with Artix Designer:

- The **Artix** perspective is associated with basic Web services projects, as well as CORBA and EJB projects.
- The **Artix for z/OS** perspective is associated with Artix for z/OS projects.
- The **Artix Database** perspective is associated with Artix database projects.
- The **Artix Management** perspective is associated with the container deployment configuration, and is also available from the standalone Management Console application.

---

### The Artix perspective

When you create an empty Artix Designer Web services project, Eclipse automatically switches to the Artix perspective.

The Artix perspective provides you with the tools that you need to develop an Artix project in Eclipse. It includes the following features:

- The Artix toolbar
- The Navigator view
- The Outline view

## Using the Artix toolbar

The Artix toolbar gives you quick access to the primary Artix Designer functionality. It contains the following buttons:

**Table 4:** *Artix Designer toolbar buttons*

Button	Description
	Run latest Artix Tools configuration. <sup>a</sup>
	Import Artix demos into Artix Designer.
	Export Artix for z/OS project (active in the Artix for z/OS perspective).
	Create a BIM file from the current WSDL file (active in the Artix for z/OS perspective).
	Validate selected WSDL for Artix for z/OS (active in the Artix for z/OS perspective).
	Add <code>import</code> element to currently selected WSDL file.
	Add <code>type</code> element to currently selected WSDL file.
	Add <code>message</code> element to currently selected WSDL file.
	Add <code>portType</code> element to currently selected WSDL file.
	Add <code>binding</code> element to currently selected WSDL file.
	Add <code>service</code> element to currently selected WSDL file.
	Add <code>route</code> element to currently selected WSDL file.
	Define an access control list (ACL) to apply to a port type or an operation.
	CORBA-enable the current WSDL file after it has a fully defined interface.

**Table 4:** *Artix Designer toolbar buttons (Continued)*

Button	Description
	SOAP-enable the current WSDL file after it has a fully defined interface.

- a. If a code generation configuration already exists, clicking this button launches the last-used configuration. Click the down arrow next to this button to run other configurations, or to open the Artix Tools dialog.

## Cheat sheets

The Eclipse environment provides an online documentation type that it calls cheat sheets. Cheat sheets are interactive tutorials that guide you step by step through common tasks.

Artix Designer ships with several Artix-related cheat sheets to help you:

- Create an Artix Designer project
- Generate a client-server application
- Create a WSDL file's logical and physical elements
- Generate code for a services plug-in and deploy it in an Artix container

Each cheat sheet lists the steps required to complete a particular task. As you progress from one step to the next, the cheat sheet automatically launches the required tools for you.

Artix Designer also provides cheat sheets to help you learn to use the Artix Management Console, the Artix for z/OS off-host components, and Artix database services.

To view the available Artix Designer cheat sheets, select **Help | Cheat Sheets**.

## Online Help

Help on Artix Designer is available from within the Eclipse online Help system.

Select **Help | Help Contents** to view the Eclipse Help. The Artix Designer Help section is listed in the table of contents frame on the left.

In addition, you can access context-sensitive Help from within the Artix Designer wizards and the Artix Generator window by pressing **F1**.

---

# Creating Artix Designer Projects

---

## Overview

This section begins a tutorial on creating and using Artix Designer projects in Eclipse. The tutorial walks you through the steps to create two empty, basic Web services projects, one for your Java code and one for your C++ code.

**Note:** You must keep your C++ and Java code in separate projects, because Eclipse does not support the use of the JDT and the CDT in the same project.

---


## Creating the Web services projects

To create a basic Web services project:

1. In Eclipse, select **File | New | Project**.
2. In the **New Project** dialog box, expand the **IONA Artix Designer** folder.
3. Select **Basic Web Services Project** and then click **Next**.
4. In the **New Basic Web Service Project** panel:
  - i. Type `JavaHello` in the **Project name** text box.
  - ii. Leave the **Use default** checkbox checked (unless you want to store the project somewhere other than your current Eclipse workspace).
  - iii. Select **Empty project** in the **Project Templates** area.
  - iv. Click **Finish**.
5. If is not currently open, Eclipse automatically switches to the Artix perspective.

An empty project name **JavaHello**, containing a number of empty folders, is added to the Navigator view in Eclipse.

**Figure 3:** *The Empty JavaHello Project in the Navigator View*



Now create a second empty, basic Web services project and name it **CppHello**.

Your Eclipse workspace now displays two Artix projects in the Navigator view:

- **CppHello**
- **JavaHello**

---

# Creating a WSDL File

---

## Overview

This section shows how to use Artix Designer to create a simple WSDL file that forms the basis of your Web services application. The same WSDL file is used to generate both Java and C++ versions of an application.

---

## Creating an empty WSDL file

To create an empty WSDL file:

1. Make sure the Artix perspective is currently active in the Eclipse workspace.
2. Select **File | New | WSDL File**.
3. In the **WSDL File** panel, select the **JavaHello** project folder. This specifies where the WSDL file is to be stored.
4. In the **File name** text box, type `HelloWorld`.
5. Click **Finish**.

The `HelloWorld.wsdl` file opens in the WSDL Editor.

---

## Linking to the WSDL file from CppHello

To generate the C++ client and server code from the same `HelloWorld.wsdl` WSDL file, link to the Java project's file from the CppHello project:


1. In the Eclipse workspace, select **File | New | WSDL File**.
2. In the **WSDL File** panel, select the **CppHello** project folder.
3. In the **File name** text box, type `HelloWorld`.
4. Click the **Advanced** button.
5. Select the **Link to file in the file system** checkbox and click **Browse**.
6. Browse to the `EclipseWorkspace\JavaHello` directory, select the **HelloWorld.wsdl** file, and click **Open**.

**Note:** You specified the location of your `EclipseWorkspace` directory when you first started Eclipse. The default location for Windows users is in your My Documents directory. The default location for UNIX/Linux users is `ArtixInstallDir/artix/4.0/eclipse/workspace`

7. Click **Finish**.

The `HelloWorld.wsdl` file now appears as a link in the **CppHello** project.

**Figure 4:** *The CppHello Project With a Link to the HelloWorld.wsdl File*



**Note:** When you use a link to a file (instead of a copy of the file), the same file is used by both the CppHello and JavaHello projects.

It is also possible to import the WSDL file into the CppHello project by selecting **File | Import**. However, this would create a separate physical file, and any changes you made to one WSDL file would not be replicated in the other.

# Defining the WSDL Elements

---

## Overview

Next, add the elements to make the WSDL file a valid Artix contract.

Artix Designer provides a series of wizards that allow you to create each of these elements.

This section guides you through the task of creating the contract elements in the following topics:

- [“Defining Types” on page 47](#)
- [“Defining Messages” on page 52](#)
- [“Defining Port Types” on page 55](#)
- [“Defining Bindings” on page 59](#)
- [“Defining a Service” on page 63](#)

---

# Defining Types

---

## Overview

The `types` element of the WSDL file contains all the data types used between the client and server.

In this simple example, we will create two `element` types of type `string`:

- `InElement`, which maps to the *in* part of the request message that you will create later
  - `OutElement`, which maps to the *out* part of the response message.
- 

## Defining element types

To define the `InElement` type:


1. Open the `HelloWorld.wsdl` file from either the JavaHello or the CppHello project.
2. Click the **Diagram** tab at bottom of the WSDL Editor view.
3. In the Diagram view, right-click the **Types** node.

**Note:** You can also add elements to a WSDL file from the **Artix Designer** menu, or by clicking the appropriate icon in the Artix toolbar. See [Table 4 on page 40](#) for more on the available icons.

4. Select **New Type** from the pop-up menu. The New Type wizard opens.

5. In the Select Source Resources panel, make sure **HelloWorld.wsdl** is selected in the **Source File(s)** section.


**Figure 5:** *The Select Source Resources Panel*

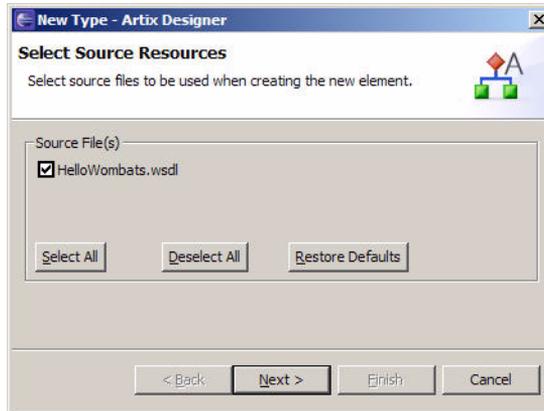

6. Click **Next** to display the Define Type Properties panel.
7. In the Define Type Properties panel:
  - i. Type **InElement** in the **Name** text box.
  - ii. Accept the default target namespace provided.
  - iii. Select the **element** radio button.

- iv. Click **Next**.


**Figure 6:** *The Define Type Properties Panel*

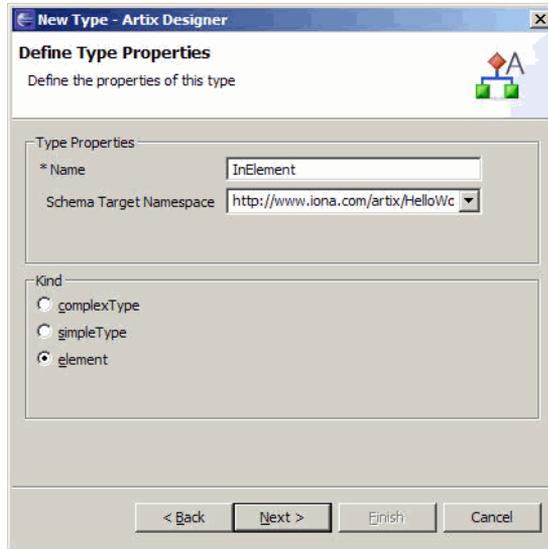

8. In the Define Element Data panel:
  - i. Select the **Pre-declared Type** button.
  - ii. Select **string** from the drop-down list.

- iii. Leave the other controls blank.

**Figure 7:** *The Define Element Data Panel*

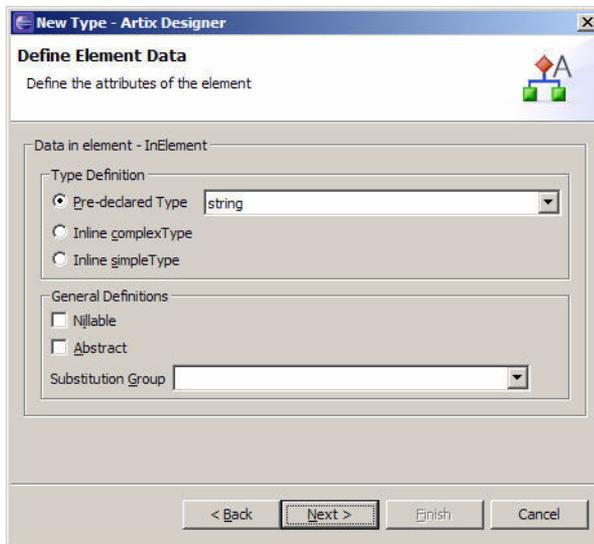

9. Click **Next** to display the View Type Summary panel, then click **Finish**.

To define the `OutElement` type:

1. Repeat steps 2 to 6 above.
2. In the Define Type Properties panel:
  - i. Enter `OutElement` in the **Name** field.
  - ii. Select the **element** radio button
  - iii. Click **Next**.
3. In the Define Element Data panel:
  - i. Select **Pre-declared Type**
  - ii. Select **string** from the drop-down list.
  - iii. Click **Next**.
4. In the View Type Summary panel, click **Finish**.

Save your WSDL file by selecting **File | Save** from the menu bar or right-click in the Source view and select **Save**.

**Review**

Click the **Source** tab at the bottom of the WSDL Editor view to look over the WSDL file created so far.

In the Outline view in the lower left of the Eclipse window, open the **Types** node. Click the name of a `types` element to jump to that element in the WSDL Editor view.

```
<types>
  <schema targetNamespace="http://www.iona.com/artix/HelloWorld"
    xmlns="http://www.w3.org/2001/XMLSchema">
    <element name="InElement" type="string"/>
    <element name="OutElement" type="string"/>
  </schema>
</types>
```

---

## Defining Messages

---

### Overview

Now that you have created the WSDL types, you can define the request and response messages for your Web service.

You will use your types as the message parts.


---

### Defining messages

To define the request message:

1. With the `HelloWorld.wsdl` file open and the Diagram view displayed, right-click the **Messages** node.
2. Select **New Message** from the pop-up menu. The New Message wizard opens.
3. In the Select Source Resources panel, make sure **HelloWorld.wsdl** is selected in the **Source File(s)** section.
4. Click **Next**.
5. In the the Define Message Properties panel:
  - i. Type `RequestMessage` in the **Name** text box.
  - ii. Click **Next**.


**Figure 8:** *Define Message Properties panel*

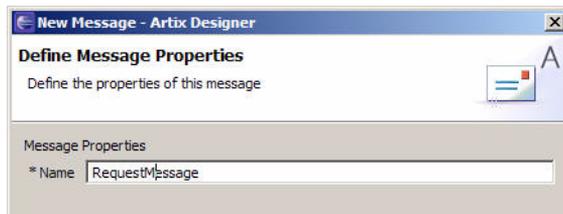


6. In the Define Message Parts panel:
  - i. Type `InPart` in the **Name** text box.
  - ii. Select **InElement** from the **Type** drop-down list.

- iii. Click **Add** to add the message part to the **Part List** section.

**Figure 9:** *The Define Message Parts panel*

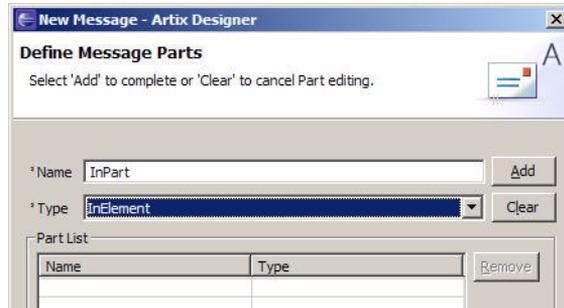

**Figure 10:** *The Define Message Parts panel, after clicking Add*

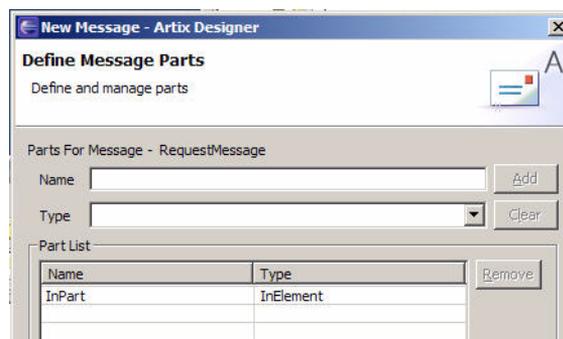

7. Click **Next** to display the View Message Summary panel.
8. Click **Finish**.

To define the response message:

1. Repeat steps 1 to 4 above.
2. In the Define Message Properties panel:
  - i. Type **ResponseMessage** in the **Name** text box
  - ii. Click **Next**.
3. In the Define Message Parts panel:
  - i. Type **OutPart** in the **Name** text box
  - ii. Select **OutElement** from the **Type** drop-down list.

- iii. Click **Add** to add the message part to the **Part List** section.
  4. Click **Next** to display the View Message Summary panel.
  5. Click **Finish**.
  6. Save the WSDL file.
- 

## Review

You have now added request and response messages to your WSDL file.

The request message includes an in part that maps to the `InElement` type, and the response message includes an out part that maps to the `OutElement` type.

```
<message name="RequestMessage">
  <part element="tns:InElement" name="InPart"/>
</message>
<message name="ResponseMessage">
  <part element="tns:OutElement" name="OutPart"/>
</message>
```

For a thorough explanation of creating messages, see *Understanding Artix Contracts*.

---

# Defining Port Types

---

## Overview

The `portType` element contains operations, which are composed of one or more messages:

- A one-way operation includes only an input message; the client application does not receive a response from the Web service.
- A request-response operation includes an input message, an output message, and zero or more fault messages<sup>1</sup>.

In this example, you will define a port type that includes one request-response operation called `sayHi` which uses `RequestMessage` as its input and `ResponseMessage` as its output.

There is nothing significant about the names assigned to the messages or parts; name assignments are to assist the developer. Artix does not care what names are used.

---

## Defining a port type


To define a port type:

1. With the `HelloWorld.wsdl` file open and the Diagram view displayed, right-click the **Port Types** node.
2. Select **New Port Type** from the pop-up menu. The New Port Type wizard opens.
3. In the Select Source Resources panel, make sure **HelloWorld.wsdl** is selected in the **Source File(s)** section.
4. Click **Next**.

1. Defining and coding fault messages is discussed in “Creating User-Defined Exceptions” in both *Developing Artix Applications in C++* and *Developing Artix Applications in Java*.


5. In the Define Port Type Properties panel:
  - i. Type **HelloWorldPT** in the **Name** text box.
  - ii. Click **Next**.

**Figure 11:** *The Define Port Type Properties panel*

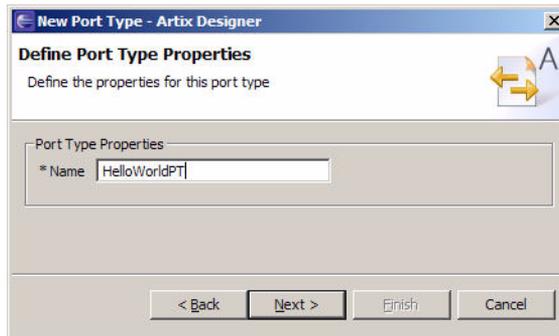

6. In the Define Port Type Operations panel:
  - i. Type **sayHi** in the **Name** text box.
  - ii. Select **Request-response** from the **Style** drop-down list.


**Figure 12:** *The Define Port Type Operations panel*

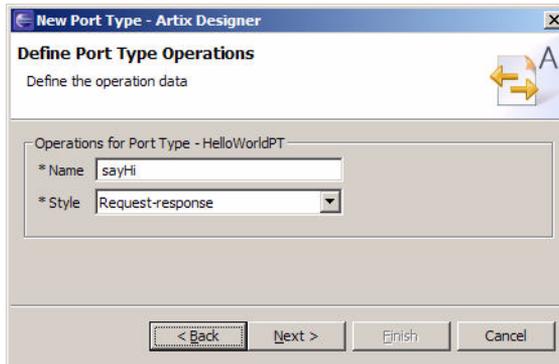

7. Click **Next**.

8. In the Define Operation Messages panel:
  - i. In the **Type** drop-down list, select **input**.
  - ii. In the **Message** drop-down list, select **RequestMessage**.  
The name **sayHiRequest** appears in the **Name** text box. You can change this to something more meaningful for your application if you prefer. For this tutorial, leave the suggested name as is.
  - iii. Click **Add** to add the operation to the **Operation Messages** section.
  - iv. Expand the **Type** drop-down list again. Note that **input** no longer appears in the list, because an operation can have only one input message.
  - v. Select **output** from the **Type** list and **ResponseMessage** from the **Message** list.  
The name **sayHiResponse** appears in the **Name** text box. Leave the suggested name as is.
  - vi. Click **Add** to add the operation to the **Operation Messages** section.

**Figure 13:** *The Define Operation Messages Panel*

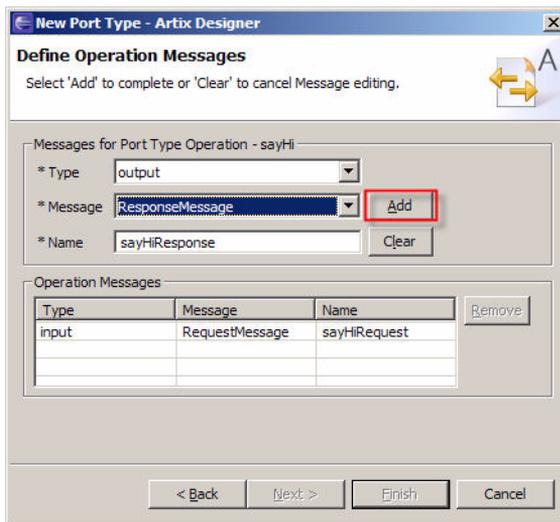

**Note:** Expand the **Type** drop-down list again and notice that the **output** entry no longer appears in the list. This is because an operation can have only one output message.

Although this example does not include any fault messages, you can add one or more fault messages to each operation.

9. Click **Next** to display the Port Type Summary panel.
10. Click **Finish** to close the wizard.
11. Save the WSDL file.

## Review

---

You have now added the following `portType` element to your WSDL file.

```
<portType name="HelloWorldPT">
  <operation name="sayHi">
    <input message="tns:RequestMessage" name="sayHiRequest"/>
    <output message="tns:ResponseMessage" name="sayHiResponse"/>
  </operation>
</portType>
```

---

## Defining Bindings

---

### Overview

The `binding` element in a WSDL file defines the message format and protocol details for each port. Each binding is associated with a single `portType` element, although the same `portType` can be associated with multiple bindings.

In this example, you will specify the document/literal binding style, which is required when message parts are element types.

---

### Defining a binding

To define a binding:

1. With the `HelloWorld.wsdl` file open and the Diagram view displayed, right-click the **Bindings** node.
2. Select **New Binding** from the pop-up menu. The New Binding wizard opens.
3. In the Select Source Resources panel, make sure **HelloWorld.wsdl** is selected in the **Source File(s)** section.
4. Click **Next**.

5. In the Select Binding Type panel:
  - i. Select **SOAP** from the list of binding types.
  - ii. Click **Next**.

**Figure 14:** *The Select Binding Type Panel*




6. In the Set Binding Defaults panel:
  - i. Select **HelloWorldPT** from the **Port Type** drop-down list.  
 In this case, your WSDL file contains only one `portType` element. If there were multiple port types, you would select one from the drop-down list.

**Note:** A name is already entered in the **Binding** text box. You can change this entry, but be sure to give each binding in the WSDL file a unique name.

- ii. In the **Additional Settings** section, select **document** from the **Style** drop-down list.
- iii. Select **literal** from the **Use** drop-down list.


- iv. Click **Next**.


**Figure 15:** *The Set Binding Defaults Panel*

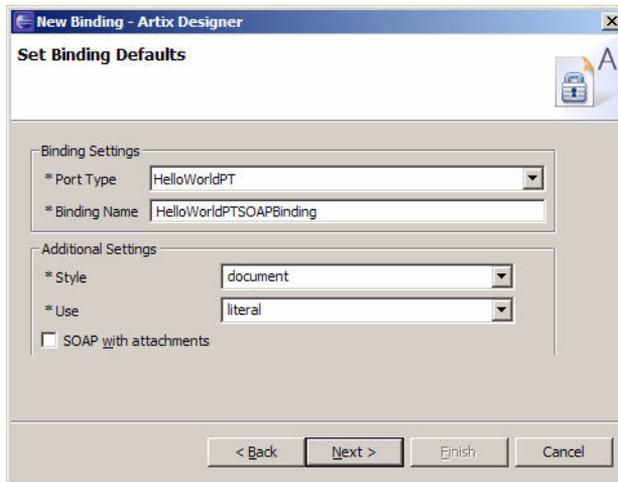

- 7. In the Edit Operation panel:
  - i. In the Operations Editor on the left, expand the **Operations** node.
  - ii. Click each **sayHi** operation node to review its binding details.

**Figure 16:** *Edit Operation panel*

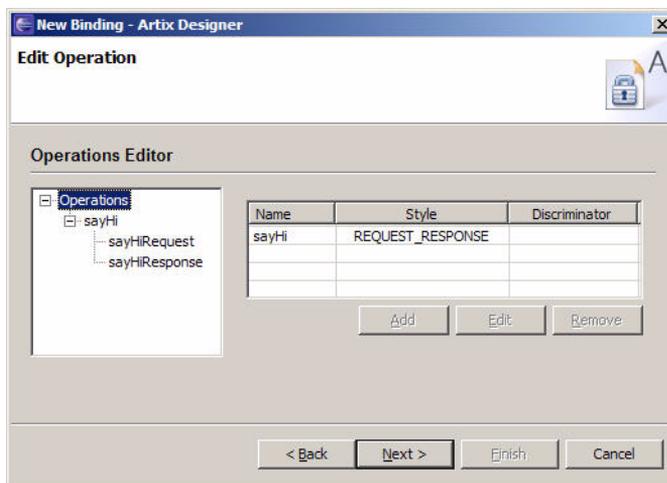

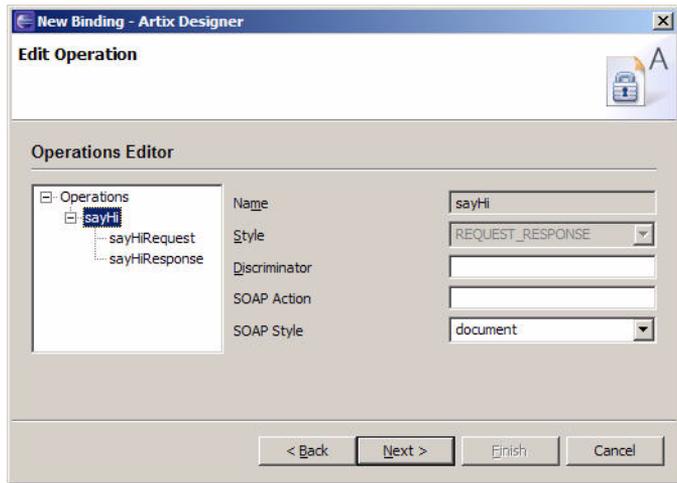**Figure 17:** Edit Operation panel, sayHi node selected

8. Click **Next** to display the View Binding Summary panel.
9. Click **Finish** to close the wizard.
10. Save the WSDL file.

## Review

You have now added the following `binding` element to your WSDL file.

```
<binding name="HelloWorldPTSOAPBinding" type="tns:HelloWorldPT">
  <soap:binding style="document" transport="http://
    schemas.xmlsoap.org/soap/http"/>
  <operation name="sayHi">
    <soap:operation soapAction="" style="document"/>
    <input name="sayHiRequest">
      <soap:body use="literal"/>
    </input>
    <output name="sayHiResponse">
      <soap:body use="literal"/>
    </output>
  </operation>
</binding>
```

---

## Defining a Service

---

### Overview

The `service` element of a WSDL file provides transport-specific information. Each service element can include one or more `port` elements. Each `port` element must be uniquely identified by the value of its `name` attribute.

Each `port` element is associated with a single `binding` element, although the same `binding` element can be associated with one or more `port` elements. In addition, a WSDL file can contain multiple `service` elements.

In this example, the WSDL file contains one `service` element, which contains a single `port` element.

---

### Defining a service

To define a service:


1. With the `HelloWorld.wsdl` file open and the Diagram view displayed, right-click the **Services** node.
2. Select **New Service** from the pop-up menu. The New Service wizard opens.
3. In the Select Source Resources panel, make sure **HelloWorld.wsdl** is selected in the **Source File(s)** section.
4. Click **Next**.
5. In the Define Service panel:
  - i. Type `HelloWorldService` in the **Name** text box.
  - ii. Click **Next**.

**Figure 18:** *The Define Service Panel*



6. In the Define Port panel:
  - i. Type **HelloWorldPort** in the **Name** text box.
  - ii. Select **HelloWorldPTSOAPBinding** from the **Binding** drop-down list.
  - iii. Click **Next**.


**Figure 19:** *The Define Port panel*

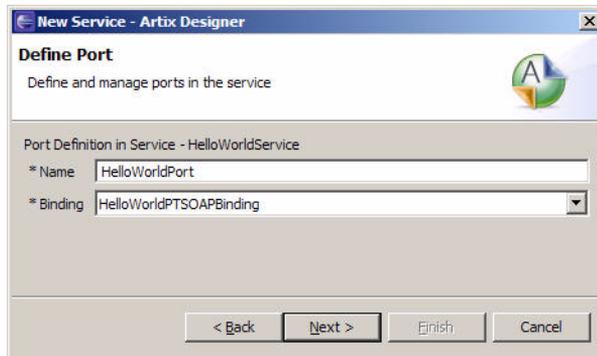

7. In the Define Port Properties panel:
  - i. From the **Transport Type** drop-down list, select **SOAP/HTTP**.
  - ii. In the **Address** section, click below the **Value** header and type the following as the value for the location attribute:

```
http://localhost:9000/HelloWorldService/HelloWorldPort
```

**Figure 20:** *The Define Port Properties panel*

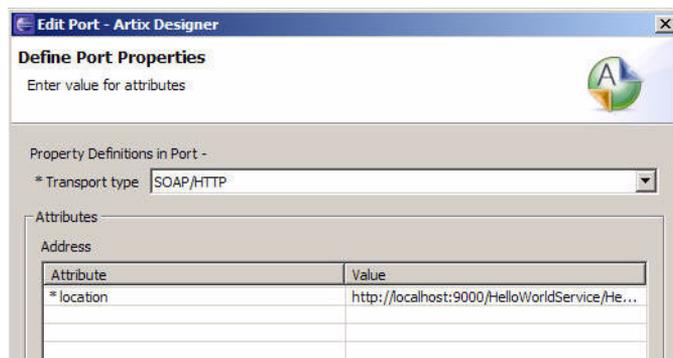

8. Click **Next** to display the View Service and Port Summary panel.
9. Click **Finish** to close the wizard.
10. Save the WSDL file.

## Review

You have now completed your WSDL contract and are ready to use it to develop an application.

Click the **Source** tab in the WSDL Editor to review the WSDL that you have created. It should look like the following:

### Example 10: *The completed HelloWorld.wsdl file*

```
<?xml version="1.0" encoding="UTF-8"?>
<!--WSDL file template-->
<!--Created by IONA Artix Designer-->
<definitions name="HelloWorld.wsdl"
  targetNamespace="http://www.iona.com/artix/HelloWorld"
  xmlns="http://schemas.xmlsoap.org/wsdl/"
  xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
  xmlns:tns="http://www.iona.com/artix/HelloWorld"
  xmlns:wSDL="http://schemas.xmlsoap.org/wsdl/"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <types>
    <schema
      targetNamespace="http://www.iona.com/artix/HelloWorld"
      xmlns="http://www.w3.org/2001/XMLSchema">
      <element name="InElement" type="string"/>
      <element name="OutElement" type="string"/>
    </schema>
  </types>
  <message name="RequestMessage">
    <part element="tns:InElement" name="InPart"/>
  </message>
  <message name="ResponseMessage">
    <part element="tns:OutElement" name="OutPart"/>
  </message>
  <portType name="HelloWorldPT">
    <operation name="sayHi">
      <input message="tns:RequestMessage" name="sayHiRequest"/>
      <output message="tns:ResponseMessage" name="sayHiResponse"/>
    >
    </operation>
  </portType>
```

**Example 10:** *The completed HelloWorld.wsdl file (Continued)*

```
<binding name="HelloWorldPTSOAPBinding"
  type="tns:HelloWorldPT">
  <soap:binding style="document" transport="http://
schemas.xmlsoap.org/soap/http"/>
  <operation name="sayHi">
    <soap:operation soapAction="" style="document"/>
    <input name="sayHiRequest">
      <soap:body use="literal"/>
    </input>
    <output name="sayHiResponse">
      <soap:body use="literal"/>
    </output>
  </operation>
</binding>
<service name="HelloWorldService">
  <port binding="tns:HelloWorldPTSOAPBinding"
    name="HelloWorldPort">
    <soap:address location="http://localhost:9000/
HelloWorldService/HelloWorldPort"/>
  </port>
</service>
</definitions>
```

---

# Developing the Applications

---

## Overview

In this section, you will develop client and server applications in both Java and C++ based on the `HelloWorld.wsdl` file.

To do this, you will use the Artix Tools to generate the code and any other necessary configuration files.

---

## Compiling the code automatically

Because the Artix Tools are integrated with the Eclipse JDT and CDT, you can ensure that your code is compiled automatically as soon as it is generated. In addition, any changes you make to a Java or C++ file will be recompiled as soon as you save the file.

To make sure your code is compiled automatically, select **Build Automatically** from the **Project** menu in Eclipse.

---

## Creating code generation configurations

---

### Artix Tools

The Artix Tools allow you to create and manage code generation configurations, and to generate code.

In this example, we will create separate code generation configurations for a


- Java client and server
- C++ client and server

**Creating the Java client and server**

To create the Java client and server configuration:

1. From the **Artix Designer** menu, select **Artix Tools | Artix Tools**.
2. In the Artix Tools panel, select **Artix Code Generation** and click **New** to create a configuration.


**Figure 21:** *The Artix Tools panel*

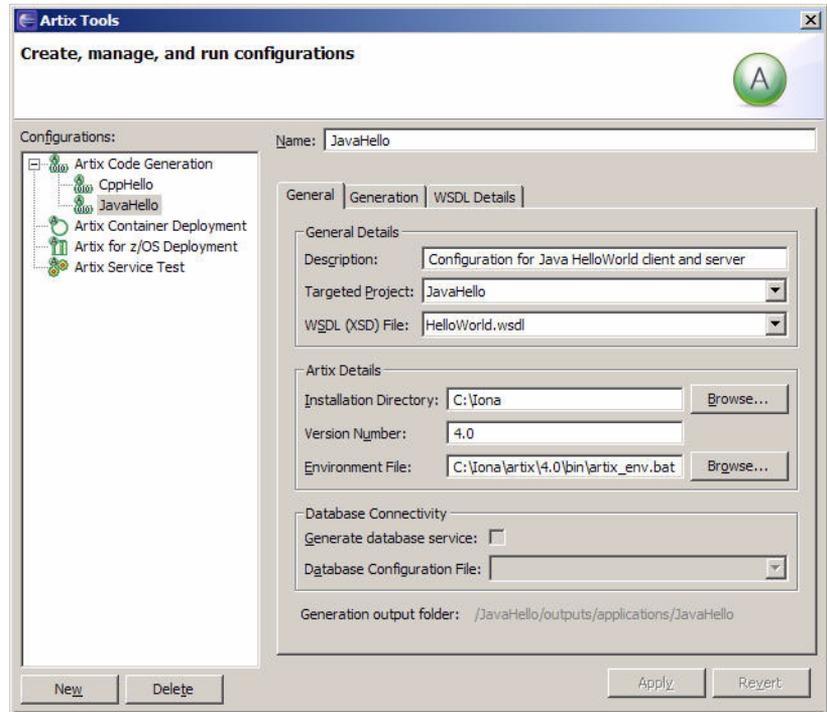

3. In the **Name** text box, replace the default name with something more meaningful, such as **JavaHello**.
4. In the General Details tabbed page:
  - i. Type a description for the configuration in the **Description** text box. For example, enter **Configuration for HelloWorld Java client and server**.
  - ii. From the **Targeted Project** drop-down list, select **JavaHello**.

- iii. From the **WSDL (XSD) File** drop-down list, select **HelloWorld.wsdl**.
- iv. Make sure the **Installation Directory** text box displays the path to your Artix installation directory; for example `C:\Iona`.
- v. Make sure the **Environment File** text box displays the correct path to your `artix_env` script.


**Figure 22:** *Artix Tools panel, General tab*

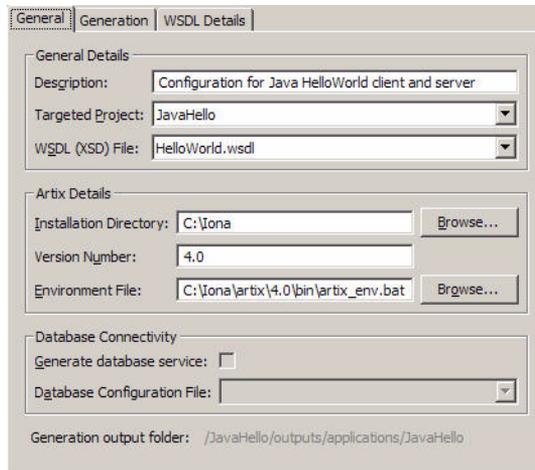

5. Click the **Generation** tab. Then:
  - i. In the Generation Type section, select **Application**.
  - ii. In the Application Type section, select **Client and server**.
  - iii. In the Development Language section, select **Java**.

- iv. Leave the other controls in their default states.


**Figure 23:** *Artix Tools panel, Generation tab*

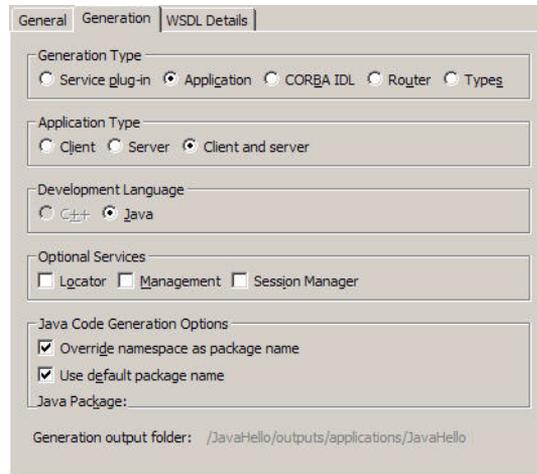

- 6. Click the **WSDL Details** tab. Then:
  - i. Select the **Services/ports** radio button.
  - ii. Make sure the **HelloWorldService / HelloWorldPort** checkbox is checked.

- iii. In the Generation Options section, select all three check boxes.

**Figure 24:** *Artix Tools panel, WSDL Details tab*

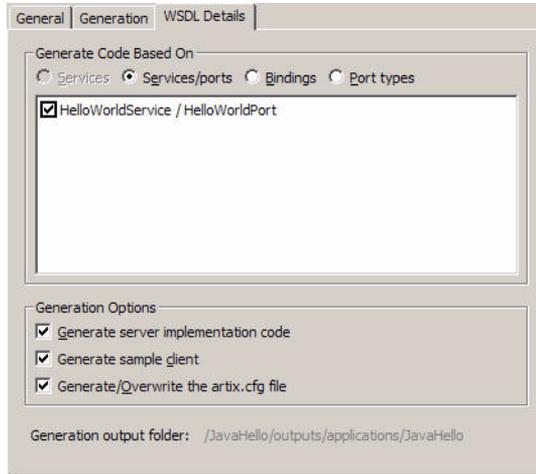

7. Click **Run**.

The Artix Tools create all the Java classes and configuration files for your client application. The Eclipse JDT compiles the code automatically.

The source code is stored in the following location:

```
EclipseWorkspace\JavaHello\outputs\applications\JavaHello\src\com
\iona\artix\JavaHello
```

The compiled bytecode is written to the following location:

```
EclipseWorkspace\JavaHello\bin
```

## Creating the C++ client and server

Since the Java and C++ applications are so similar, you can quickly create the C++ configuration by duplicating the Java configuration and editing it.

**Note:** Make sure you have sourced the correct version of Visual C++ in your `start_eclipse` script before creating the C++ configuration. See the *Installation Guide* for information on setting this up.

To create the C++ client and server configuration:

1. In the Eclipse menu, select the **Artix Designer | Artix Tools | Artix Tools** menu.
2. In the Artix Tools window, in the Configurations tree on the left, right-click the **JavaHello** configuration and select **Duplicate** from the context menu.
3. In the **Name** text box, change the name to **CppHello**.
4. In the General tabbed page:
  - i. Edit the description.
  - ii. From the **Targeted Project** drop-down list, select **CppHello**.
  - iii. From the **WSDL (XSD) File** drop-down list, select **HelloWorld.wsdl**.
5. Click the **Generation** tab. Then:
  - i. In the Generation Type section, select **Application**.
  - ii. In the Application Type section, select **Client and server**.
  - iii. In the Development Language section, select **C++**.
  - iv. In the C++ Code Generation section, select the **Generate a make file** checkbox.
6. Click the **WSDL Details** tab. Then:
  - i. Select the **Services/ports** radio button.
  - ii. Make sure the **HelloWorldService / HelloWorldPort** checkbox is checked.
  - iii. In the Generation Options section, check all three options.
7. Click **Run**.

The Artix Tools create all the C++ source and header files for your client and server applications in the following location:

```
EclipseWorkspace\CppHello\outputs\applications\CppHello\src
```

# Adding Logic to the Code

---

## Overview

Through the code generation process, you have generated client and server application code in both C++ and Java.

All of these applications compile and run. However, because there is no business logic in the server implementation, and because the C++ client code does not actually make a request against the Web service, running the applications does not produce output.

You must complete the coding in the files representing the C++ and Java implementation objects and in the C++ client mainline file. The Java client mainline file is a complete but very basic application, and thereby needs no modification.

---

## In this section

This section contains the following topics:

- [“The Java Code” on page 75](#)
- [“The C++ Code” on page 77](#)

---

## The Java Code

---

### Overview

The code generation produced several files. This subsection explains the purpose of each of these files. The files are:

- [“HelloWorldPTServer.java”](#)
  - [“HelloWorldPTImpl.java”](#)
  - [“HelloWorldPT.java”](#)
  - [“HelloWorldPTTypeFactory.java”](#)
  - [“HelloWorldPTDemo.java”](#)
- 

### HelloWorldPTServer.java

This file contains starting point code for a server mainline application. For this simple example, the generated code in this file represents a fully functional application. With a more involved application, you might extend the generated code.

You may want to add the following line to the `main()` method, before the `bus.run();` statement, so that something appears in the Eclipse Console view when the server runs:

```
System.out.println("Starting server ...");
```

The Eclipse JDT automatically recompiles the bytecode with your changes.

---

### HelloWorldPTImpl.java

This file contains the starting point code for your Web service’s implementation class. For this example, you need to modify the `sayHi` method.

To complete the `sayHi` method:

1. Open the file `HelloWorldPTImpl.java`.
2. Add the following code to the `sayHi` method body:

```
return "Hello " + inPart;
```

Save the file.

---

**HelloWorldPT.java**

This file represents the interface definition common to both the client and server applications. This interface defines the operation offered by the Web service.

```
public String sayHi(String inPart) throws RemoteException
```

---

**HelloWorldPTTypeFactory.java**

Definition of the classes that create and manage any types defined in your WSDL file.

---

**HelloWorldPTDemo.java**

This file represents the client mainline application. For this simple example, the generated code in this file represents a fully functioning application. With a more involved application, you would use this code as a template for writing a more complex client application.

---

## The C++ Code

---

### Overview

The code generation wizard produces several files. This subsection explains the purpose of each of these files. The files are:

- [“HelloWorldPTClientSample.cxx”](#)
- [“HelloWorldPT.h” on page 78](#)
- [“HelloWorldPTClient.h/.cxx” on page 78](#)
- [“HelloWorld\\_wsdlTypesFactory.h/.cxx” on page 78](#)
- [“HelloWorldPTServer.h/.cxx” on page 78](#)
- [“HelloWorldPTServerSample.cxx” on page 78](#)
- [“HelloWorldPTImpl.h/.cxx” on page 79](#)

---

### HelloWorldPTClientSample.cxx

The only file you need to edit is `HelloWorldPTClientSample.cxx`.

The code generation process produces a simple invocation of the `sayHi` method, but the code is commented out, there is no value assigned to the `InPart` string, and there is no output statement.

To add these features, complete the following steps:

1. Open the `HelloWorldPTClientSample.cxx` file, look for the phrase "Sample invocation calls," and add the following code:

```
IT_Bus::String InPart="Artix User";
IT_Bus::String OutPart;
client->sayHi(InPart, OutPart);
cout << OutPart << endl;
```

2. Save and exit the file.

The Eclipse CDT automatically recompiles the code with your changes.

**HelloWorldPT.h**

---

This header file is common to both the client and server applications. It contains the signatures for each of the Web service operations. Open this file and review the signature for the `sayHi` method.

```
virtual void
sayHi (
    const IT_Bus::String &InPart,
    IT_Bus::String &OutPart
) IT_THROW_DECL((IT_Bus::Exception)) = 0;
```

**HelloWorldPTClient.h/.cxx**

---

These files represent the client proxy class. Your client mainline code must instantiate an instance of this class to invoke on the Web service. The proxy class includes multiple constructors, a destructor, and a method for each of the Web service's operations.

In this simple application, your client code uses the no argument constructor. Alternative constructors allow you to change the WSDL file, service name, or port name initialization values. One constructor allows initialization from an Artix reference.

**HelloWorld\_wsdlTypesFactory.h/.cxx**

---

These files are common to both the client and server applications and include definitions and implementations for the factory methods required if your application-specific types includes the `anyType`.

For this tutorial, you do not need to be concerned with the contents of these files.

**HelloWorldPTServer.h/.cxx**

---

These files represent the server stub class. Your code does not directly use this class. Rather, the implementation class is a subclass of the `HelloWorldPTServer` class.

For this tutorial, you do not need to be concerned with the contents of these files.

**HelloWorldPTServerSample.cxx**

---

This file represents the server mainline application. For this tutorial, you do not need to edit the contents of this file. The server mainline instantiates an instance of the implementation class and registers it with the Artix runtime. The process then enters an event loop to process incoming requests.

**HelloWorldPTImpl.h/.cxx**

---

These files represent your Web service's implementation class. The `HelloWorldPTImpl.cxx` file contains compilable code, including basic processing logic in the method bodies.

---

# Running the Applications

---

## Overview

You are now ready to run the client and server applications in both C++ and Java.

You can launch Java and C++ applications from within the Eclipse environment, although the procedures for each are different.

---

## Running the Java applications

To run the Java server:

1. Right-click the **JavaHello** project folder and select **Run As | Run** from the context menu (or invoke **Run | Run** from the main Eclipse menu).
2. In the Run dialog, select **JavaHello\_HelloWorldPTServer\_server** from the **Configurations** tree on the left.
3. Click **Run**.

The server process starts running in the Eclipse Console view. After a moment, the words "Server Ready" appear in the Eclipse Console view.

To run the Java client:

1. Right-click the **JavaHello** project folder and select **Run As | Run** from the context menu.
2. Select **JavaHello\_HelloWorldPTDemo\_client** from the **Configurations** tree on the left.
3. Click the **Arguments** tab.
4. In the **Program Arguments** text box, add the following to the end of the argument:

```
sayHi "Artix User"
```

5. Click **Apply**.
6. Click **Run**.

The words "Hello Artix User" appear in the Eclipse Console view.

---

## Stopping applications started within Eclipse

You can stop applications that you started within Eclipse by using the toolbar buttons above the Eclipse Console view.

To clear the client output, click the **Remove All Terminated Launches** button on the Console view's toolbar.

**Figure 25:** *Eclipse Console View toolbar*



To stop the server process, click the **Terminate** button.

Click the **Remove All Terminated Launches** button again to clear the server output.

## Running the C++ applications

To run the C++ client against the C++ server:

1. From the Eclipse menu bar, select **Run | External Tools | External Tools**.
2. In the External Tools window, expand the **Program** node in the **Configurations** tree on the left.
3. Select the launch configuration entry for **CppHelloServer**.
4. Click **Run**.
5. Select the launch configuration entry for **CppHelloClient**.
6. Click **Run**.

Cancel and clear the C++ applications as described in [“Stopping applications started within Eclipse” on page 80](#).

## Command-line alternatives

When you use an Artix Designer code generation configuration to create an Artix application, start and stop scripts are added to the project's `bin` directory.

You can launch both Java and C++ applications by running the appropriate start script from the command prompt.

**Note:** If an application takes any arguments, you must edit its start script accordingly.

To run your C++ application from the command line:

1. Open a command prompt and change to the following directory:

```
EclipseWorkspace\CppHello\outputs\applications\CppHello\bin
```

2. Run the `start_service>HelloWorldPTServer` script.  
The server application launches in a new command window.
3. Run the `start_client>HelloWorldPTClient` script.  
The client application launches and displays the words “Hello Artix User.”

Press **Ctrl+C** to close the client and server command windows, in that order.

# Index

## A

Adaptive Runtime Technology, see ART  
applications  
    developing 67  
    running 80  
ART 2, 4, 14  
Artix  
    bus 15  
    contracts 17, 18, 46  
    documentation 9  
    features 5  
    locator 19  
    session manager 20  
    transformer 20  
Artix Designer  
    projects 38, 42  
    using 35–??  
Artix Generator 67

## B

BEA Tuxedo 4  
bindings 17, 34, 59  
bus 15

## C

C/C++ Development Tools, see CDT  
CDR 6  
CDT 37, 42, 67, 77  
COBOL 36  
code  
    adding logic to 74  
    generating 67  
Common Data Representation, see CDR  
contracts 17, 18, 46  
CORBA 6, 38  
CORBA IDL 7, 36

## D

deployment phase 8  
design phase 7  
development phase 8

## E

EAI 3  
Eclipse 8, 36, 37, 38, 39, 41, 42, 43, 44, 51, 67,  
    72, 73, 75, 77, 80  
    console view 75, 80  
    help system 41  
endpoints 14  
enterprise application integration, see EAI  
enterprise service bus, See ESB  
ESB 2

## F

Field Manipulation Language, see FML  
Fixed 6  
fixed record length, see FRL  
FML 6  
FRL 6

## G

G2 6  
generating code 67

## H

HTTP 6

## I

IDL 7  
IIOP 6

## J

Java Development Tools, see JDT  
Java Messaging Service 6  
JDT 37, 42, 67, 72, 75

## L

locator 19

## M

messages 17, 52  
MQSeries 6

## O

operations 17, 31

## P

payload formats 6  
plug-ins 14  
ports 17  
portTypes 17, 22, 31, 55  
protocols 6

## S

service 63  
service-oriented architecture, see SOA  
services 17, 34  
session manager 20  
SOA 2  
SOAP 2, 6

## T

TIBCO 6  
TibrvMsg 6  
transformer 20  
transports 6  
Tuxedo 6  
types 17, 47

## V

VRL 6

## W

W3C 22  
Web Services Description Language, see WSDL  
WebSphere MQ 4  
World Wide Web Consortium, see W3C  
WSDL 9, 17, 21–34  
    defined 22  
WSDL files  
    adding elements to 46  
    creating 44

## X

XML 6  
XML Schema Definition, see XSD  
XSD 25, 36