



# Silk Test 17.5

Silk4NET User Guide

**Micro Focus**  
**The Lawn**  
**22-30 Old Bath Road**  
**Newbury, Berkshire RG14 1QN**  
**UK**  
<http://www.microfocus.com>

**Copyright © Micro Focus 1992-2016. All rights reserved.**

**MICRO FOCUS, the Micro Focus logo and Silk Test are trademarks or registered trademarks of Micro Focus IP Development Limited or its subsidiaries or affiliated companies in the United States, United Kingdom and other countries.**

**All other marks are the property of their respective owners.**

**2016-11-03**

# Contents

<b>Licensing Information</b>	<b>9</b>
<b>Silk4NET</b>	<b>10</b>
Do I Need Administrator Privileges to Run Silk4NET?	10
Automation Under Special Conditions (Missing Peripherals)	10
Silk Test Product Suite	12
Providing Usage Data	13
Contacting Micro Focus	14
Information Needed by Micro Focus SupportLine	14
<b>What's New in Silk4NET</b>	<b>15</b>
Mobile Device Live View	15
Testing Hybrid Mobile Applications	15
Enhanced Cross-Browser Testing	15
Using Devices and Browsers that are Managed by Silk Central	15
Usability Enhancements	15
API Enhancements	16
Technology Updates	16
Microsoft Windows 10 Anniversary Update	16
New Mozilla Firefox Versions	17
Google Chrome Support	17
Android Support	17
Java SWT Support	17
<b>Getting Started with Silk4NET</b>	<b>18</b>
<b>Working with Silk4NET Projects</b>	<b>19</b>
Creating a Silk4NET Project	19
<b>Working with Silk4NET Tests</b>	<b>21</b>
Adding a Silk4NET Test to a Project	21
Recording a Silk4NET Test	22
Recording a Test on Microsoft Edge	23
Recording a Test on Mozilla Firefox	24
Recording a Test on Google Chrome	24
Characters Excluded from Recording and Replaying	25
Actions Available During Recording	25
Manually Creating a Silk4NET Test	25
Best Practices for Creating Test Scripts	26
Adding a Verification to a Script while Recording	27
Adding a Locator or an Object Map Item to a Test Method Using the Locator Spy	27
Running Silk4NET Tests	28
Running Tests in Parallel	28
Analyzing Test Results	29
How Does Silk4NET Synchronize Tests?	29
Enabling the Playback Status Dialog Box	31
<b>Visual Execution Logs with TrueLog</b>	<b>32</b>
Enabling TrueLog	32
Changing the Location of the TrueLog	33
Why is TrueLog Not Displaying Non-ASCII Characters Correctly?	33
Why Does TrueLog Not Write Result Files During Playback?	33
<b>Using Silk4NET with Team Foundation Server in Visual Studio 2010</b>	<b>35</b>
Executing Silk4NET Tests in TFS	35
Locating TrueLog Files for Silk4NET Tests Executed with TFS	36

<b>Silk Test Open Agent</b>	<b>37</b>
Starting the Silk Test Open Agent	37
Stopping the Open Agent After Test Execution	37
Agent Options	37
Open Agent Port Numbers	44
Configuring the Port to Connect to the Information Service	45
Configuring the Port to Connect to the Open Agent	45
Configuring the Port to Connect to Silk Test Recorder	46
Remote Testing with the Open Agent	46
Testing with a Remote Open Agent	46
Configuring the Open Agent to Run Remotely in a NAT Environment	47
<b>Base State</b>	<b>48</b>
Modifying the Base State	48
Running the Base State	49
<b>Application Configuration</b>	<b>50</b>
Modifying an Application Configuration	50
Select Application Dialog Box	51
Editing Remote Locations	52
Application Configuration Errors	53
Troubleshooting Application Configurations	53
Creating a Test that Tests Multiple Applications	54
<b>Setting Script Options</b>	<b>55</b>
Setting TrueLog Options	55
Setting Recording Preferences	55
Setting Browser Recording Options	56
Setting Custom Attributes	57
Setting Classes to Ignore	58
Setting WPF Classes to Expose During Recording and Playback	58
Setting Synchronization Options	58
Setting Replay Options	59
Setting Advanced Options	60
<b>Silk4NET Sample Tests</b>	<b>62</b>
<b>Object Recognition</b>	<b>63</b>
Locator Basic Concepts	63
Object Type and Search Scope	63
Using Attributes to Identify an Object	64
Locator Syntax	64
Using Locators	66
Using the Find Method	67
Using Locators to Check if an Object Exists	67
Identifying Multiple Objects with One Locator	68
Locator Customization	68
Stable Identifiers	69
Custom Attributes	71
Troubleshooting Performance Issues for XPath	73
Locator Spy	74
<b>Object Maps</b>	<b>75</b>
Advantages of Using Object Maps	76
Turning Object Maps Off and On	76
Using Assets in Multiple Projects	76
Merging Object Maps During Action Recording	77
Using Object Maps with Web Applications	78
Renaming an Object Map Item	79
Modifying Object Maps	79
Modifying a Locator in an Object Map	80

Updating Object Maps from the Test Application .....	81
Copying an Object Map Item .....	82
Adding an Object Map Item .....	82
Opening an Object Map from a Script .....	83
Highlighting an Object Map Item in the Test Application .....	83
Navigating from a Locator to an Object Map Entry in a Script .....	84
Finding Errors in an Object Map .....	84
Deleting an Object Map Item .....	85
Initially Filling Object Maps .....	85
Grouping Elements in Object Maps .....	85
Object Maps: Frequently Asked Questions .....	86
Can I Merge Multiple Object Maps Into a Single Map? .....	86
What Happens to an Object Map when I Delete a Test Script? .....	86
Can I Manually Create an Object Map for My Application Under Test? .....	86
<b>Image Recognition Support .....</b>	<b>87</b>
Image Click Recording .....	87
Image Recognition Methods .....	87
Image Assets .....	88
Creating an Image Asset .....	88
Adding Multiple Images to the Same Image Asset .....	89
Opening an Asset from a Script .....	90
Image Verifications .....	90
Creating an Image Verification .....	90
Adding an Image Verification During Recording .....	91
Using Assets in Multiple Projects .....	91
<b>Enhancing Tests .....</b>	<b>93</b>
Recording Additional Actions Into an Existing Test .....	93
Calling Windows DLLs .....	93
Calling a Windows DLL from Within a Script .....	93
DLL Function Declaration Syntax .....	94
DLL Calling Example .....	94
Passing Arguments to DLL Functions .....	95
Passing String Arguments to DLL Functions .....	96
Aliasing a DLL Name .....	97
Conventions for Calling DLL Functions .....	97
Custom Controls .....	97
Dynamic Invoke .....	98
Adding Code to the Application Under Test to Test Custom Controls .....	99
Testing Apache Flex Custom Controls .....	101
Managing Custom Controls .....	102
Improving Object Recognition with Microsoft Accessibility .....	105
Using Accessibility .....	106
Enabling Accessibility .....	106
Overview of Silk4NET Support of Unicode Content .....	107
Text Recognition Support .....	107
Inserting a Result Comment in a Script .....	109
Measuring Execution Time .....	109
Slowing Down Tests .....	109
Testing Applications in Multiple UI Sessions on a Single Machine .....	110
<b>Debugging Scripts .....</b>	<b>113</b>
Script Reliability .....	113
Stepping Through a Script in Debug Mode .....	113
Stepping Through Script Playback from a Selected Point .....	114
Controlling Line Execution During Script Debugging .....	114
Stopping Script Playback at Selected Points .....	114

Printing a Script .....	115
<b>Testing Specific Environments .....</b>	<b>116</b>
Apache Flex Support .....	116
Configuring Flex Applications to Run in Adobe Flash Player .....	116
Launching the Component Explorer .....	117
Testing Apache Flex Applications .....	117
Testing Apache Flex Custom Controls .....	117
Customizing Apache Flex Scripts .....	126
Testing Multiple Flex Applications on the Same Web Page .....	126
Adobe AIR Support .....	127
Overview of the Flex Select Method Using Name or Index .....	127
Selecting an Item in the FlexDataGrid Control .....	127
Enabling Your Flex Application for Testing .....	128
Styles in Apache Flex Applications .....	139
Configuring Flex Applications for Adobe Flash Player Security Restrictions .....	140
Attributes for Apache Flex Applications .....	140
Why Cannot Silk4NET Recognize Apache Flex Controls? .....	141
Java AWT/Swing Support .....	141
Attributes for Java AWT/Swing Applications .....	141
Dynamically Invoking Java Methods .....	142
Determining the priorLabel in the Java AWT/Swing Technology Domain .....	143
Oracle Forms Support .....	143
Java SWT and Eclipse RCP Support .....	144
Java SWT Class Reference .....	144
Java SWT Custom Attributes .....	144
Attributes for Java SWT Applications .....	145
Dynamically Invoking Java Methods .....	145
Troubleshooting Java SWT and Eclipse Applications .....	146
Testing Mobile Applications .....	146
Android .....	147
iOS .....	150
Testing an Installed App .....	157
Recording Mobile Applications .....	157
Selecting the Mobile Device for Test Replay .....	157
Connection String for a Mobile Device .....	158
Interacting with a Mobile Device .....	161
Releasing a Mobile Device .....	162
Troubleshooting when Testing Mobile Applications .....	163
Limitations for Testing Mobile Web Applications .....	167
Limitations for Testing Native Mobile Applications .....	168
Clicking on Objects in a Mobile Website .....	169
Using Existing Mobile Web Tests .....	169
.NET Support .....	170
Windows Forms Support .....	170
Windows Presentation Foundation (WPF) Support .....	176
Silverlight Application Support .....	184
Visual COBOL Support .....	189
Rumba Support .....	193
Rumba Class Reference .....	193
Enabling and Disabling Rumba .....	193
Locator Attributes for Identifying Rumba Controls .....	194
Using Screen Verifications with Rumba .....	194
Testing a Unix Display .....	195
SAP Support .....	195
SAP Class Reference .....	195
Attributes for SAP Applications .....	195

Dynamically Invoking SAP Methods .....	196
Dynamically Invoking Methods on SAP Controls .....	197
Configuring Automation Security Settings for SAP .....	197
Windows API-Based Application Support .....	197
Win32 Class Reference .....	198
Attributes for Windows API-based Client/Server Applications .....	198
Determining the priorLabel in the Win32 Technology Domain .....	198
Cross-Browser Testing .....	198
Selecting the Browser for Test Replay .....	200
Test Objects for xBrowser .....	201
Object Recognition for xBrowser Objects .....	202
Page Synchronization for xBrowser .....	202
Comparing API Playback and Native Playback for xBrowser .....	203
Setting Mouse Move Preferences .....	204
Browser Configuration Settings for xBrowser .....	204
Configuring the Locator Generator for xBrowser .....	206
Connection String for a Remote Desktop Browser .....	206
Testing with Apple Safari on a Mac .....	207
Testing with Google Chrome .....	210
Testing with Mozilla Firefox .....	213
Testing with Microsoft Edge .....	216
Cross-Browser Testing: Frequently Asked Questions .....	218
Starting a Browser from a Script .....	222
Finding Hidden Input Fields .....	222
Attributes for Web Applications .....	223
Custom Attributes for Web Applications .....	223
xBrowser Class Reference .....	224
Limitations for Testing on Microsoft Windows 10 .....	224
64-bit Application Support .....	224
Supported Attribute Types .....	224
Attributes for Apache Flex Applications .....	224
Attributes for Java AWT/Swing Applications .....	225
Attributes for Java SWT Applications .....	225
Attributes for SAP Applications .....	225
Locator Attributes for Identifying Silverlight Controls .....	226
Locator Attributes for Identifying Rumba Controls .....	227
Attributes for Web Applications .....	227
Attributes for Windows Forms Applications .....	228
Attributes for Windows Presentation Foundation (WPF) Applications .....	228
Attributes for Windows API-based Client/Server Applications .....	229
Dynamic Locator Attributes .....	230
<b>Keyword-Driven Tests .....</b>	<b>231</b>
Advantages of Keyword-Driven Testing .....	231
Keywords .....	232
Creating a Keyword-Driven Test in Silk4NET .....	233
Recording a Keyword-Driven Test in Silk4NET .....	234
Setting the Base State for a Keyword-Driven Test in Silk4NET .....	235
Implementing a Keyword in Silk4NET .....	235
Recording a Keyword in Silk4NET .....	236
Marking a Test Method in a Script as a Keyword .....	236
Editing a Keyword-Driven Test .....	237
Managing Keywords in a Test in Silk Central .....	237
Which Keywords Does Silk4NET Recommend? .....	239
Using Parameters with Keywords .....	240
Example: Keywords with Parameters .....	241
Combining Keywords into Keyword Sequences .....	242

Replaying a Keyword-Driven Test with Specific Variables .....	243
Integrating Silk4NET with Silk Central .....	243
Implementing Silk Central Keywords in Silk4NET .....	244
Uploading a Keyword Library to Silk Central .....	245
Uploading a Keyword Library to Silk Central from the Command Line .....	245
Searching for a Keyword .....	246
Filtering Keywords .....	246
Grouping Keywords .....	246
<b>Known Issues .....</b>	<b>248</b>
General Issues .....	248
Mobile Web Applications .....	250
Web Applications .....	250
Google Chrome .....	250
Internet Explorer .....	251
Microsoft Edge .....	252
Mozilla Firefox .....	252
SAP Applications .....	253
Oracle Forms .....	254
Silk4NET .....	254

# Licensing Information

Unless you are using a trial version, Silk Test requires a license.



**Note:** A Silk Test license is bound to a specific version of Silk Test. For example, Silk Test 17.5 requires a Silk Test 17.5 license.

The licensing model is based on the client that you are using and the applications that you want to be able to test. The available licensing modes support the following application types:

Licensing Mode	Application Type
Mobile Native	<ul style="list-style-type: none"> <li>• Mobile web applications.               <ul style="list-style-type: none"> <li>• Android</li> <li>• iOS</li> </ul> </li> <li>• Native mobile applications.               <ul style="list-style-type: none"> <li>• Android</li> <li>• iOS</li> </ul> </li> </ul>
Full	<ul style="list-style-type: none"> <li>• Web applications, including the following:               <ul style="list-style-type: none"> <li>• Apache Flex</li> <li>• Java-Applets</li> </ul> </li> <li>• Mobile web applications.               <ul style="list-style-type: none"> <li>• Android</li> <li>• iOS</li> </ul> </li> <li>• Apache Flex</li> <li>• Java AWT/Swing, including Oracle Forms</li> <li>• Java SWT and Eclipse RCP</li> <li>• .NET, including Windows Forms and Windows Presentation Foundation (WPF)</li> <li>• Rumba</li> <li>• Windows API-Based</li> </ul> <p> <b>Note:</b> To upgrade your license to a Full license, visit <a href="http://www.borland.com">www.borland.com</a>.</p>
Premium	<p>All application types that are supported with a <i>Full</i> license, plus SAP applications.</p> <p> <b>Note:</b> To upgrade your license to a Premium license, visit <a href="http://www.borland.com">www.borland.com</a>.</p>
Mobile Native Add-On	<p>In addition to the technologies supported with a Full or Premium license, the mobile native add-on license offers support for testing native mobile applications on Android and iOS.</p>

# Silk4NET

Silk4NET is the Silk Test plug-in for Microsoft Visual Studio. Silk4NET enables you to efficiently create and manage functional, regression, and localization tests directly in Visual Studio. With Silk4NET, you can perform the following tasks within Visual studio:

- Record tests.
- Develop tests using Visual Basic .NET.
- Develop tests using C#.
- Run tests as a part of a test plan in the Microsoft test environment.
- Run tests as a part of your build process.
- View test results.

For information on the tested versions of Visual Studio, refer to the [Release Notes](#).

Silk4NET supports the testing of a broad set of application technologies. Designed for realizing automation benefits even when applied to complex tests, Silk4NET brings true test automation capability directly to the developer's preferred environment and lets you easily cope with changes made in the test application.

Additionally, the powerful testing framework of Silk4NET enables high reusability of tests across multiple test projects, which further increases the achievable Return On Investment (ROI). With less time spent on building and maintaining testing suites, your QA staff can expand test coverage and optimize application quality.



**Note:** If you have opted not to display the start screen when you start Silk4NET, you can check for available updates by clicking **Help > Check for Product Update**.

## Do I Need Administrator Privileges to Run Silk4NET?

You require the following privileges to install or run Silk4NET:

- To install Silk4NET, you must have local administrator privileges.
- To install Silk4NET on a Windows server, you must have domain-level administrator privileges.
- To run Silk4NET, you require full access rights to the following folders, including all subfolders:
  - C:\ProgramData\Silk\SilkTest.
  - %APPDATA%\Roaming\Silk\SilkTest.
  - %APPDATA%\Local\Silk\SilkTest.
  - %TEMP%.

## Automation Under Special Conditions (Missing Peripherals)

### Basic product orientation

Silk4NET is a GUI testing product that tries to act like a human user in order to achieve meaningful test results under automation conditions. A test performed by Silk4NET should be as valuable as a test performed by a human user while executing much faster. This means that Silk4NET requires a testing environment that is as similar as possible to the testing environment that a human user would require in order to perform the same test.

## Physical peripherals

Manually testing the UI of a real application requires physical input and output devices like a keyboard, a mouse, and a display. Silk4NET does not necessarily require physical input devices during test replay. What Silk4NET requires is the ability of the operating system to perform keystrokes and mouse clicks. The Silk4NET replay usually works as expected without any input devices connected. However, some device drivers might block the Silk4NET replay mechanisms if the physical input device is not available.

The same applies to physical output devices. A physical display does not necessarily need to be connected, but a working video device driver must be installed and the operating system must be in a condition to render things to the screen. For example, rendering is not possible in screen saver mode or if a session is locked. If rendering is not possible, low-level replay will not work and high-level replay might also not work as expected, depend on the technology that is used in the application under test (AUT).

## Virtual machines

Silk4NET does not directly support virtualization vendors, but can operate with any type of virtualization solution as long as the virtual guest machine behaves like a physical machine. Standard peripherals are usually provided as virtual devices, regardless of which physical devices are used with the machine that runs the virtual machine.

## Cloud instances

From an automation point of view, a cloud instance is not different to a virtual machine. However, a cloud instance might run some special video rendering optimization, which might lead to situations where screen rendering is temporarily turned off to save hardware resources. This might happen when the cloud instance detects that no client is actively viewing the display. In such a case, you could open a VNC window as a workaround.

## Special cases

### Application launched without any window (headless)

Such an application cannot be tested with Silk4NET. Silk4NET needs to hook to a target application process in order to interact with it. Hooking is not possible for processes that do not have a visible window. In such a case you can only run system commands.

### Remote desktops, terminal services, and remote applications (all vendors)

If Silk4NET resides and operates within a remote desktop session, it will fully operate as expected.



**Note:** You require a full user session and the remote viewing window needs to be maximized. If the remote viewing window is not displayed for some reason, for example network issues, Silk4NET will continue to replay but might produce unexpected results, depending on what remote viewing technology is used. For example, a lost remote desktop session will negatively impact video rendering, whereas other remote viewing solutions might show no impact at all once the viewing window was lost.

If Silk4NET is used to interact with the remote desktop, remote view, or remote app window, only low-level techniques can be used, because Silk4NET sees only a screenshot of the remote machine. For some remote viewing solutions even low-level operations may not be possible because of security restrictions. For example, it might not be possible to send keystrokes to a remote application window.

### Known automation obstacles

Silk4NET requires an interactively-logged-on full-user session. Disable anything that could lock the session, for example screen savers, hibernation, or sleep mode. If this is not possible because of organizational policies you could workaround such issues by adding *keep alive* actions, for example moving the mouse, in regular intervals or at the end of each test case.




**Note:** Depending on the configuration of the actual testing environment and the technologies that are used for the AUT, the virtualization, and the terminal services, you may face additional challenges and limitations during the test automation process.

## Silk Test Product Suite

Silk Test is an automated testing tool for fast and reliable functional and regression testing. Silk Test helps development teams, quality teams, and business analysts to deliver software faster, and with high quality. With Silk Test you can record and replay tests across multiple platforms and devices to ensure that your applications work exactly as intended.

The Silk Test product suite includes the following components:

- Silk Test Workbench – Silk Test Workbench is the quality testing environment that offers .NET scripting for power users and easy to use visual tests to make testing more accessible to a broader audience.
- Silk4NET – The Silk4NET Visual Studio plug-in enables you to create Visual Basic or C# test scripts directly in Visual Studio.
- Silk4J – The Silk4J Eclipse plug-in enables you to create Java-based test scripts directly in your Eclipse environment.
- Silk Test Classic – Silk Test Classic is the Silk Test client that enables you to create scripts based on 4Test.
- Silk Test Agents – The Silk Test agent is the software process that translates the commands in your tests into GUI-specific commands. In other words, the agent drives and monitors the application you are testing. One agent can run locally on the host machine. In a networked environment, any number of agents can run on remote machines.

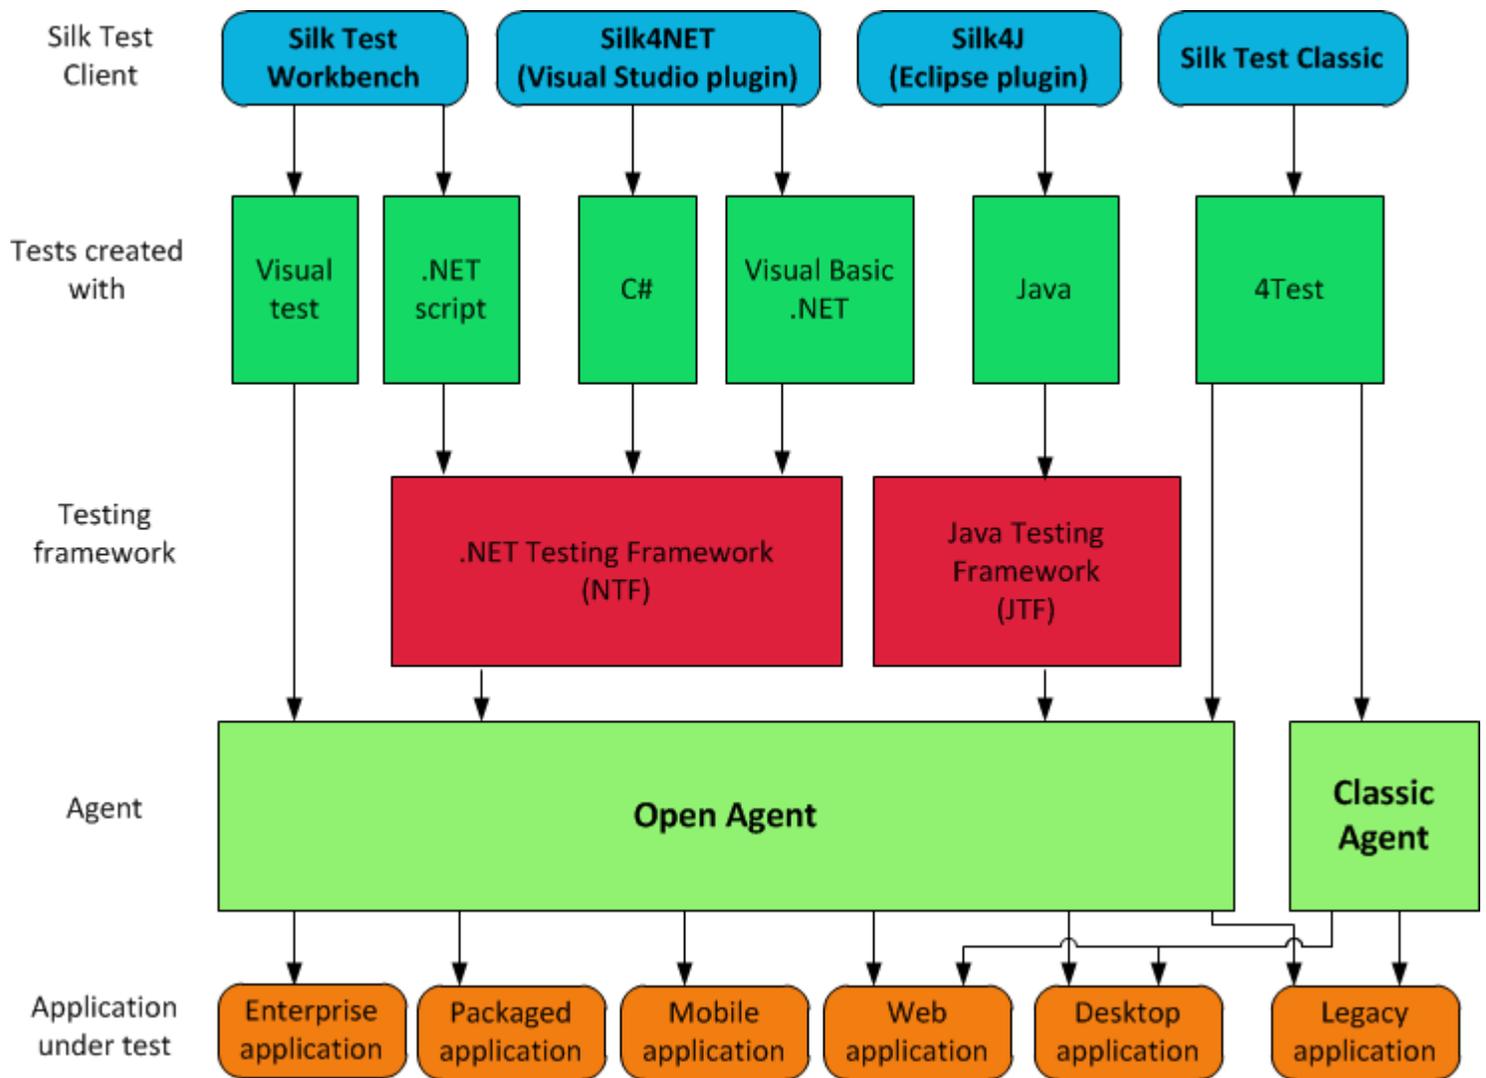

The sizes of the individual boxes in the image above differ for visualization purposes and do not reflect the included functionality.

The product suite that you install determines which components are available. To install all components, choose the complete install option. To install all components with the exception of Silk Test Classic, choose the standard install option.

## Providing Usage Data

To help Micro Focus improve your overall testing experience, Micro Focus would like to collect some information on how you use Micro Focus software and services. By allowing Micro Focus to collect this information, you assist Micro Focus in identifying trends and usage patterns.

To enable or disable the collection of usage data by Micro Focus:

1. Click **Silk4NET > About Silk4NET** in the menu.
2. In the About dialog box, click **Customer Feedback Options**.
3. Select one of the following options:
  - To enable usage data collection, click **Yes, I am willing to participate**.

- To disable usage data collection, click **No, I would not like to participate**.
4. Click **OK**.

## Contacting Micro Focus

Micro Focus is committed to providing world-class technical support and consulting services. Micro Focus provides worldwide support, delivering timely, reliable service to ensure every customer's business success.

All customers who are under a maintenance and support contract, as well as prospective customers who are evaluating products, are eligible for customer support. Our highly trained staff respond to your requests as quickly and professionally as possible.

Visit <http://supportline.microfocus.com/assistedservices.asp> to communicate directly with Micro Focus SupportLine to resolve your issues, or email [supportline@microfocus.com](mailto:supportline@microfocus.com).

Visit Micro Focus SupportLine at <http://supportline.microfocus.com> for up-to-date support news and access to other support information. First time users may be required to register to the site.

## Information Needed by Micro Focus SupportLine

When contacting Micro Focus SupportLine, please include the following information if possible. The more information you can give, the better Micro Focus SupportLine can help you.

- The name and version number of all products that you think might be causing an issue.
- Your computer make and model.
- System information such as operating system name and version, processors, and memory details.
- Any detailed description of the issue, including steps to reproduce the issue.
- Exact wording of any error messages involved.
- Your serial number.

To find out these numbers, look in the subject line and body of your Electronic Product Delivery Notice email that you received from Micro Focus.

# What's New in Silk4NET

Silk4NET supports the following new features:

## Mobile Device Live View

Do you need to see what is currently happening on a mobile device, even if the device is in another room, another building, or even another country? While you record or replay on a mobile device or emulator, Silk4NET mirrors the display of the mobile device on the desktop, enabling you to see every action that is performed on the device in real time.

## Testing Hybrid Mobile Applications

Hybrid mobile applications (apps) use web technologies wrapped in native mobile apps to ease building cross-device compatible apps. Silk4NET now supports testing such apps on Android and iOS, by exposing both the full Silk4NET browser testing API as well as the full native mobile API.

## Enhanced Cross-Browser Testing

Silk Test 17.5 features the following cross browser enhancements:

- To enable you to incorporate the browser-specific features of Google Chrome in your web application testing, Silk Test 17.5 introduces action and locator recording support for Google Chrome.
- With Silk Test 17.5, the replay performance of cross-browser scripts in Mozilla Firefox, Google Chrome, and Microsoft Edge is significantly improved.

## Using Devices and Browsers that are Managed by Silk Central

You can now execute your mobile and web tests on mobile devices and browsers that are managed by Silk Central. Just add Silk Central as a remote location and start testing on all managed devices and browsers.

## Usability Enhancements

This section lists usability enhancements that have been made in Silk Test 17.5.

### Enhanced action recording for mobile and web applications

Silk Test enables you to record the default action for an object without having to choose. This makes action recording faster and easier. While recording actions against a mobile application or a web application in Microsoft Edge, Mozilla Firefox, Google Chrome, or Apple Safari, you no longer have to select every action in the **Choose Action** dialog. However, the **Choose Action** dialog continues to open for objects that do not offer a default action, for example text fields, and you can still open the **Choose Action** dialog by right-clicking on any object.

### Disabling remote locations

To decrease the amount of browsers and devices displayed in the **Select Application** dialog, you can now enable or disable the remote locations in the **Edit Remote Locations** dialog. When disabling a location, the installed browsers and connected devices are no longer displayed in the **Select Application** dialog.

### Multiple application domain support for WPF

Multi application domain enables you to design and implement secure .NET WPF applications. Silk4NET now supports testing WPF applications that use multiple application domains.

### Ignoring specific WPF classes

To generate compact and easy to read locators for WPF controls, you can now specify any WPF classes that Silk4NET should ignore as transparent classes.

### Clicking on a specified location on an image

When you perform an image click, Silk Test by default clicks into the center of the image asset. This might not always be the best choice. With Silk Test 17.5, you can specify the exact location on which clicks should be performed in the image asset UI.

### Customizing TrueLog file names

You can now add placeholders to the TrueLog file name. These placeholders are replaced with the appropriate data at execution time.

## API Enhancements

This section lists API enhancements that have been made in Silk Test 17.5.

### Setting the geographic location of a mobile device

You can now use the `SetLocation` method of the `MobileDevice` class to set the geographic location of a mobile device.

### Testing cross-domain IFrames with Google Chrome

To test cross-domain IFrames with Google Chrome 49 or later, you do no longer have to set the options `OPT_XBROWSER_GOOGLECHROME_USER_DATA_DIR` and `OPT_XBROWSER_GOOGLECHROME_SECURE_ORIGINS`. Silk Test now supports testing such IFrames with Google Chrome out-of-the-box.



**Note:** As these options have been removed from Silk Test, remove any code for setting these options from any existing scripts for cross-domain IFrame testing with Google Chrome.

## Technology Updates

This section lists the significant technology updates for Silk Test 17.5.

### Microsoft Windows 10 Anniversary Update

With Silk Test 17.5, you can leverage your test set by simply executing all your existing functional, regression, and localization tests on Microsoft Windows 10 Anniversary Update.

Additionally, Silk Test 17.5 offers support for Microsoft Edge 38.14393, the new browser version for Microsoft Windows 10 Anniversary Update.

## New Mozilla Firefox Versions

In addition to the versions of Mozilla Firefox, which have been tested with the previous version of Silk Test, Silk Test has been tested for recording and replay with the following new versions of Mozilla Firefox:

- Mozilla Firefox 47
- Mozilla Firefox 48
- Mozilla Firefox 49



**Note:** This list includes the new versions of Mozilla Firefox that have been tested with Silk Test 17.5 until the release date of Silk Test 17.5. Silk Test 17.5 should be able to support newer versions of Mozilla Firefox, even if these versions have been released after the release date of Silk Test 17.5.

## Google Chrome Support

In addition to the versions of Google Chrome, which have been tested with the previous version of Silk Test, Silk Test playback has now been tested with the following versions of Google Chrome:

- Google Chrome 51
- Google Chrome 52
- Google Chrome 53
- Google Chrome 54



**Note:** This list includes the versions of Google Chrome that have been tested with Silk Test 17.5 until the release date of Silk Test 17.5. Silk Test 17.5 should be able to support newer versions of Google Chrome, even if these versions have been released after the release date of Silk Test 17.5.

## Android Support

In addition to the Android versions, which have been tested with the previous version of Silk Test, Silk Test now includes support for mobile web applications and native mobile applications for the following operating systems:

- Android 7.0

## Java SWT Support

Silk Test now supports Java SWT 4.6 standalone and Rich Client Platform (RCP) applications.

# Getting Started with Silk4NET

Silk4NET enables you to create and execute automated functional and regression tests. Perform the following actions to get started with Silk4NET:

1. Create a Silk4NET project.
2. Create automated Silk4NET tests, either by recording actions or keywords, or by manually scripting the tests.
3. Add the Silk4NET tests to your project. A project can include any combination of recorded tests and manually scripted tests.
4. Execute the tests.
5. Analyze the test results.

# Working with Silk4NET Projects

This section describes how you can use Silk4NET projects.

A Silk4NET project contains all the resources needed to test the functionality of your applications by using Silk4NET.



**Note:** To optimally use the functionality that Silk4NET provides, create an individual project for each application that you want to test, except when testing multiple applications in the same test.

## Creating a Silk4NET Project

1. Click **Silk4NET > New Project** or **File > New Project** . The **New Project** dialog box displays.
2. Under **Installed > Templates**, click **Visual Basic** or **Visual C#**, select **Test** and then select **Silk4NET Project**.
3. Type a name for the project into the **Name** field.  
For the tutorial, type `Tutorial`.
4. *Optional:* Type a name for the solution into the **Solution** field.
5. Click **OK**. The **Project Created** dialog box opens.
6. Click **Yes** to start recording a new test or click **No** to create an empty project.  
For the tutorial, click **No**.  
If you have selected to start recording, the **Add New Item** dialog box opens.
7. In the **Add New Item** dialog box, select which type of test you want to record.
  - To bundle the recorded actions into one or more keywords, select **Silk4NET Keyword-Driven Test**.
  - To record the test without creating keywords, select **Silk4NET Test**.
8. If you have selected to start recording, type a name for the new test into the **Name** text box in the **Add New Item** dialog box.
9. Click **Add**.
10. If you have selected to record a new Silk4NET test, the **Select Application** dialog box opens. Select the tab that corresponds to the type of application that you want to test:
  - If you are testing a standard application that does not run in a browser, select the **Windows** tab.
  - If you are testing a web application or a mobile web application, select the **Web** tab.
  - If you are testing a native mobile application, select the **Mobile** tab.
11. To test a standard application, if you have not set an application configuration for the current project, select the application from the list.
12. To test a Web application or a mobile Web application, if you have not set an application configuration for the current project, select one of the installed browsers or mobile browsers from the list.  
Specify the Web page to open in the **Enter URL to navigate** text box. If an instance of the selected browser is already running, you can click **Use URL from running browser** to record against the URL currently displayed in the running browser instance. For the tutorial, select **Internet Explorer** and specify <http://demo.borland.com/InsuranceWebExtJS/> in the **Enter URL to navigate** text box.
13. To test a native mobile application (app) if you have not set an application configuration for the current project:
  - a) Select the mobile device, on which you want to test the app, from the list.
  - b) Click **Browse** to select the app file or enter the full path to the app file into the **Mobile app file** text field.

Silk4NET supports HTTP and UNC formats for the path.

Silk4NET installs the app on the mobile device or emulator.

14. Click **OK**. If you have selected an existing instance of Google Chrome on which you want to replay a test method, Silk4NET checks whether the automation support is included. If the automation support is not included, Silk4NET informs you that Google Chrome has to be restarted. The application and the **Recording** window open.

If you have selected to create an empty Silk4NET test, a new solution containing the Silk4NET project is created. Additionally, a Silk4NET test is created in the project with the following language-specific file name:

- UnitTest1.vb
- UnitTest1.cs



**Note:** You can also use the context menu in the **Solution Explorer** to add Silk4NET projects to an existing solution.

# Working with Silk4NET Tests

Describes how you can use Silk4NET tests.

You can create new Silk4NET tests by recording user actions made against your AUT or by manually scripting your test classes and methods in Visual Basic or Visual C#.

## Adding a Silk4NET Test to a Project

You can only add Silk4NET tests to an existing Silk4NET or Test project. If no Silk4NET or Test project exists, create a Silk4NET or Test project before you try to create a Silk4NET test.

1. Click **Silk4NET > New Test** or **Project > Add New Item**.



**Note:** If your solution contains more than one Silk4NET projects, select the project to which you want to add the new test from the list in the **Project Selector**.

The **Add New Item** dialog box opens.

2. Under **Installed**, click one of the following:

- If your project is a Visual Basic project, click **Common Items > Silk4NET Test**.
- If your project is a Visual C# project, click **Visual C# Items > Silk4NET Test**.

3. Type a name for the test into the **Name** field and click **Add**. The **Create a Silk4NET Test** dialog box opens.

4. Select how you want to create your Silk4NET test by clicking one of the following option buttons:

<b>Record a Silk4NET test</b>	Record actions and verifications against your application under test and generate a new test containing the recorded automation statements.
<b>Create an empty Silk4NET test</b>	Create an empty test that can be filled with automation statements later on.

For the tutorial, click **Create an empty Silk4NET test**.

5. Click **OK**.
6. If you have selected to record a new Silk4NET test, the **Select Application** dialog box opens. Select the tab that corresponds to the type of application that you want to test:
  - If you are testing a standard application that does not run in a browser, select the **Windows** tab.
  - If you are testing a web application or a mobile web application, select the **Web** tab.
  - If you are testing a native mobile application, select the **Mobile** tab.
7. To test a standard application, if you have not set an application configuration for the current project, select the application from the list.
8. To test a Web application or a mobile Web application, if you have not set an application configuration for the current project, select one of the installed browsers or mobile browsers from the list.

Specify the Web page to open in the **Enter URL to navigate** text box. If an instance of the selected browser is already running, you can click **Use URL from running browser** to record against the URL currently displayed in the running browser instance. For the tutorial, select **Internet Explorer** and specify <http://demo.borland.com/InsuranceWebExtJS/> in the **Enter URL to navigate** text box.
9. To test a native mobile application (app) if you have not set an application configuration for the current project:
  - a) Select the mobile device, on which you want to test the app, from the list.

b) Click **Browse** to select the app file or enter the full path to the app file into the **Mobile app file** text field.

Silk4NET supports HTTP and UNC formats for the path.

Silk4NET installs the app on the mobile device or emulator.

10. Click **OK**. If you have selected an existing instance of Google Chrome on which you want to replay a test method, Silk4NET checks whether the automation support is included. If the automation support is not included, Silk4NET informs you that Google Chrome has to be restarted. The application and the **Recording** window open.

If you have selected to record the test, the recorded test is added to your project. If you have selected to add an empty test, an empty Silk4NET test is added to your project.



**Note:** You can also use the context menu in the **Solution Explorer** to add Silk4NET tests to your Silk4NET or Test project.

## Recording a Silk4NET Test

1. Click **Silk4NET > New Test** or **Project > Add New Item**.



**Note:** If your solution contains more than one Silk4NET projects, select the project to which you want to add the new test from the list in the **Project Selector**.

The **Add New Item** dialog box opens.

2. Under **Installed**, click one of the following:

- If your project is a Visual Basic project, click **Common Items > Silk4NET Test**.
- If your project is a Visual C# project, click **Visual C# Items > Silk4NET Test**.

3. Type a name for the test into the **Name** field and click **Add**. The **Create a Silk4NET Test** dialog box opens.

4. Select **Record a Silk4NET test** and click **OK**.

5. If you have not set an application configuration for the current project, select the tab that corresponds to the type of application that you are testing:

- If you are testing a standard application that does not run in a browser, select the **Windows** tab.
- If you are testing a web application or a mobile web application, select the **Web** tab.
- If you are testing a native mobile application, select the **Mobile** tab.

6. To test a standard application, select the application from the list.

7. To test a Web application or a mobile Web application, if you have not set an application configuration for the current project, select one of the installed browsers or mobile browsers from the list.

Specify the Web page to open in the **Enter URL to navigate** text box. If an instance of the selected browser is already running, you can click **Use URL from running browser** to record against the URL currently displayed in the running browser instance. For the tutorial, select **Internet Explorer** and specify <http://demo.borland.com/InsuranceWebExtJS/> in the **Enter URL to navigate** text box.

8. To test a native mobile application (app) if you have not set an application configuration for the current project:

a) Select the mobile device, on which you want to test the app, from the list.

b) Click **Browse** to select the app file or enter the full path to the app file into the **Mobile app file** text field.

Silk4NET supports HTTP and UNC formats for the path.

Silk4NET installs the app on the mobile device or emulator.

9. Click **OK**. If you have selected an existing instance of Google Chrome on which you want to replay a test method, Silk4NET checks whether the automation support is included. If the automation support is not included, Silk4NET informs you that Google Chrome has to be restarted. The application and the **Recording** window open.

10. Perform the interactions, which you want to record, with your application under test.

For additional information about recording a mobile application, see *Recording Mobile Applications*. For information about the actions available during recording, see *Actions Available During Recording*.

11. When you are finished with recording, click **Stop**. The **Recording Complete** dialog box opens. From this dialog box, you can click **Playback** to replay the recorded test.

- If you are using Visual Studio 2010, you can also access the **Test View** in Visual Studio, where you can replay and manage your tests.
- If you are using Visual Studio 2012 or later, you can also access the **Test Explorer** in Visual Studio, where you can replay and manage your tests.

The recorded interactions are added as a file to your project. The default file name of the generated file is `UnitTest<Index>.cs` or `UnitTest<Index>.vb`, depending on the default programming language of your project. For example, if you are recording the first test for a Visual Basic project, the name of the generated file is `UnitTest1.vb`



**Note:** You can also create a new project and record the new test into the new project.

## Recording a Test on Microsoft Edge

Before you can record a Silk4NET test, you must have created a Silk4NET project.

When starting the interaction with a web application on Microsoft Edge, Silk4NET closes any open instance of Microsoft Edge and starts a new browser. This new browser uses a temporary profile without add-ons and with an empty cache. This instance of Microsoft Edge is closed when shutting down the Open Agent or when starting to test another application outside Microsoft Edge.



**Note:** You can currently not record keyword-driven tests on Microsoft Edge.

To record a new test for a web application on Microsoft Edge:

1. Select the project to which you want to add the new test.
2. In the toolbar, click **Record Actions**. The **Add New Item** dialog box opens.
3. Select **Silk4NET Test**.
4. Type a name for the new test into the **Name** field.
5. Click **Add**.
6. In the **Select Browser** dialog box, select the browser that you want to use.
7. Click **Record**.
8. The **Interactive Recording** window opens and displays the web application. Perform the actions that you want to record.
  - a) Click on the object with which you want to interact. Silk4NET performs the default action for the object. If there is no default action, or if you have to insert text or specify parameters, the **Choose Action** dialog box opens.
  - b) *Optional:* To choose an action for an object, which might not be the default action, right-click on the object. The **Choose Action** dialog box opens.
  - c) *Optional:* If the action has parameters, type the parameters into the parameter fields. Silk4NET automatically validates the parameters.
  - d) Click **OK** to close the **Choose Action** dialog box. Silk4NET adds the action to the recorded actions and replays it on the mobile device or emulator.
9. Click **Stop**. The **Record Complete** dialog box opens.
10. Click **OK**.

Replay the test to ensure that it works as expected. You can modify the test to make changes if necessary.

## Recording a Test on Mozilla Firefox

Before you can record a Silk4NET test, you must have created a Silk4NET project.

To record a new test for a web application on Mozilla Firefox:

1. Select the project to which you want to add the new test.
2. In the toolbar, click **Record Actions**. The **Add New Item** dialog box opens.
3. Select **Silk4NET Test**.
4. Type a name for the new test into the **Name** field.
5. Click **Add**.
6. In the **Select Browser** dialog box, select the browser that you want to use.
7. Click **Record**.
8. The **Interactive Recording** window opens and displays the web application. Perform the actions that you want to record.
  - a) Click on the object with which you want to interact. Silk4NET performs the default action for the object. If there is no default action, or if you have to insert text or specify parameters, the **Choose Action** dialog box opens.
  - b) *Optional:* To choose an action for an object, which might not be the default action, right-click on the object. The **Choose Action** dialog box opens.
  - c) *Optional:* If the action has parameters, type the parameters into the parameter fields. Silk4NET automatically validates the parameters.
  - d) Click **OK** to close the **Choose Action** dialog box. Silk4NET adds the action to the recorded actions and replays it on the mobile device or emulator.
9. Click **Stop**. The **Record Complete** dialog box opens.
10. Click **OK**.

Replay the test to ensure that it works as expected. You can modify the test to make changes if necessary.

## Recording a Test on Google Chrome

Silk4NET supports recording a test on Google Chrome 50 or later. For previous versions of Google Chrome, Silk4NET supports only replaying test and recording locators.

Before you can record a Silk4NET test, you must have created a Silk4NET project.



**Note:** You cannot record tests on Google Chrome versions prior to version 50.

To record a new test for a web application on Google Chrome 50 or later:

1. Select the project to which you want to add the new test.
2. In the toolbar, click **Record Actions**. The **Add New Item** dialog box opens.
3. Select **Silk4NET Test**.
4. Type a name for the new test into the **Name** field.
5. Click **Add**.
6. In the **Select Browser** dialog box, select the browser that you want to use.
7. Click **Record**.
8. The **Interactive Recording** window opens and displays the web application. Perform the actions that you want to record.

- a) Click on the object with which you want to interact. Silk4NET performs the default action for the object. If there is no default action, or if you have to insert text or specify parameters, the **Choose Action** dialog box opens.
  - b) *Optional:* To choose an action for an object, which might not be the default action, right-click on the object. The **Choose Action** dialog box opens.
  - c) *Optional:* If the action has parameters, type the parameters into the parameter fields. Silk4NET automatically validates the parameters.
  - d) Click **OK** to close the **Choose Action** dialog box. Silk4NET adds the action to the recorded actions and replays it on the mobile device or emulator.
9. Click **Stop**. The **Record Complete** dialog box opens.
10. Click **OK**.

Replay the test to ensure that it works as expected. You can modify the test to make changes if necessary.

## Characters Excluded from Recording and Replaying

The following characters are ignored by Silk Test during recording and replay:

Characters	Control
...	MenuItem
tab	MenuItem
&	All controls. The ampersand (&) is used as an accelerator and therefore not recorded.

## Actions Available During Recording

During recording, you can perform the following actions in the **Recording** window:

Action	Steps
Pause recording.	Click <b>Pause</b> to bring the AUT into a specific state without recording the actions, and then click <b>Record</b> to resume recording.
Change the sequence of the recorded actions.	To change the sequence of the recorded actions in the <b>Recording</b> window, select the actions that you want to move and drag them to the new location. To select multiple actions press <b>Ctrl</b> and click on the actions.
Remove a recorded action.	To remove a falsely recorded action from the <b>Recording</b> window, hover the mouse cursor over the action and click <b>Delete this entry</b> .
Verify an image or a property of a control.	Move the mouse cursor over the object that you want to verify and press <b>Ctrl +Alt</b> . For additional information, see <a href="#">Adding a Verification to a Script while Recording</a> .

## Manually Creating a Silk4NET Test

1. Add a Silk4NET test to your project.
2. *Optional:* To add support for controls of a specific application technology, you must include an import statement at the beginning of the test that references the application technology namespace, as shown in the following examples:

```
'Visual Basic .NET
Imports SilkTest.Ntf.Wpf
```

```
Imports SilkTest.Ntf.XBrowser
Imports SilkTest.Ntf.Win32
```

```
//C#
using SilkTest.Ntf.Wpf;
using SilkTest.Ntf.XBrowser;
using SilkTest.Ntf.Win32;
```

3. Configure the base state of the test application. For example:

```
'Visual Basic .NET
Dim baseState = New BrowserBaseState(BrowserType.InternetExplorer,
"www.borland.com")
baseState.Execute()
```

```
//C#
BrowserBaseState baseState = new
BrowserBaseState(BrowserType.InternetExplorer, "www.borland.com");
baseState.Execute();
```



**Note:** The base state makes sure that the application that you want to test is running and in the foreground. This ensures that tests will always start with the same application state, which makes them more reliable. In order to use the base state, it is necessary to specify what the main window looks like and how to launch the application that you want to test if it is not running. Creating a base state is optional. However, it is recommended as a best practice.

4. Add test classes and methods that test the desired functionality of the test application.

## Best Practices for Creating Test Scripts

The way in which you write your test cases might have a great impact on the performance and stability of your test set. During recording, Silk4NET creates scripts that are as fast and stable as possible. However, there might be circumstances that require you to manually create or edit test scripts. This topic provides some general guidelines that might help you create test scripts that are maintainable, reusable, and lead to stable tests.

- Name your tests consistently and ensure that test names are self-explaining. Try to make the names correspond with the application under test and the tested functionality. For example, the test names *MyApp\_SuccessfulLogin* and *MyApp\_FailingLogin* are far easier to understand for other users than *Untitled\_42* and *Untitled\_43*.
- Describe your test cases as thoroughly as possible in a comment. Without a good description of the test case in natural language, someone who needs to change the implementing code might not be able to comprehend what exactly the test is doing.
- Ensure that your application under test is at the proper state when the test case starts. Return the application under test to the correct state before executing the actions in a test case.
- Ensure that your application under test is at a proper state when the test case finishes. If additional tests depend on the outcome of the test, ensure that they can start. Return the application under test to the correct state when the actions in a test case are executed.
- Whenever possible, ensure that your test cases are not depending on the results of other test cases. When this is not possible, ensure that the test cases are executed in the right order.
- Add verifications to your tests, to test the correctness of your application under test as well as the functional flow.
- Use keyword-driven testing to create highly reusable action sets. Bundle commonly used actions into keywords, combine keywords that are often executed sequentially into keyword sequences, and execute combinations of keywords and keyword sequences as keyword driven-tests.
- To keep your tests maintainable and reusable, prefer writing multiple simple test cases that are combinable to writing complex test cases.
- To avoid redundancies in your test set, prefer updating existing test cases to adding new test cases.

## Adding a Verification to a Script while Recording

Do the following to add a verification to a script during recording:

1. Begin recording.
2. Move the mouse cursor over the object that you want to verify and press **Ctrl+Alt**.  
When you are recording a mobile Web application, you can also click on the object and click **Add Verification**.  
This option temporarily suspends recording and displays the **Select Verification Type** dialog box.
3. Select **Verify properties of the TestObject**.  
For information about adding an image verification to a script, see *Adding an Image Verification During Recording*.
4. Click **OK**. The **Verify Properties** dialog box opens.
5. To select the property that you want to verify, check the corresponding check box.
6. Click **OK**. Silk4NET adds the verification to the recorded script and you can continue recording.

## Adding a Locator or an Object Map Item to a Test Method Using the Locator Spy

Manually capture a locator or an object map item using the **Locator Spy** and copy the locator or the object map item to the test method. For instance, you can identify the caption or the XPath locator string for GUI objects using the **Locator Spy**. Then, copy the relevant locator strings and attributes into the test methods in your scripts.

1. Open the test class that you want to modify.
2. Click **Silk4NET > Locator Spy**. The **Locator Spy** and the application under test open. If you are testing a mobile application, a recording window opens, representing the screen of the mobile device. You cannot perform actions in the recording window, but you can perform actions on the mobile device or emulator and then refresh the recording window.
3. *Optional:* To display locators in the **Locator** column instead of object map items, uncheck the **Show object map identifiers** check box.  
Object map item names associate a logical name (an alias) with a control or a window, rather than the control or window's locator. By default, object map item names are displayed.  
 **Note:** When you check or uncheck the check box, the change is not automatically reflected in the locator details. To update an entry in the **Locator Details** table, you have to click on the entry.
4. Position the mouse over the object that you want to record. The related locator string or object map item shows in the **Selected Locator** text box.  
 **Note:** If you are testing on a browser, the **Selected Locator** field displays the locator only when you actually capture it.
5. Press **Ctrl+Alt** to capture the object.  
 **Note:** Press **Ctrl+Shift** to capture the object if you specified the alternative record break key sequence on the **General Recording Options** page of the **Script Options** dialog box.
6. *Optional:* Click **Show additional locator attributes** to display any related attributes in the **Locator Attribute** table.
7. *Optional:* You can replace a recorded locator attribute with another locator attribute from the **Locator Attribute** table.

For example, your recorded locator might look like the following:

```
/BrowserApplication//BrowserWindow//input[@id='loginButton']
```

If you have a `textContent Login` listed in the **Locator Attribute** table, you can manually change the locator to the following:

```
/BrowserApplication//BrowserWindow//input[@textContent='Login']
```

The new locator displays in the **Selected Locator** text box.

**8.** To copy the locator, click **Copy Locator to Clipboard**.

In the **Selected Locator** text box, you can also mark the portion of the locator string that you want to copy, and then you can right-click the marked text and click **Copy**.

**9.** In the script, position your cursor to the location to which you want to paste the recorded locator.

For example, position your cursor in the appropriate parameter of a `Find` method in the script.

The test method, into which you want to paste the locator, must use a method that can take a locator as a parameter. Using the **Locator Spy** ensures that the locator is valid.

**10.** Copy the locator or the object map item to the test case or to the Clipboard.

**11.** Click **Close**.

## Running Silk4NET Tests

This topic describes how you can run your Silk4NET tests in Visual Studio.

**1.** To view all the tests that are available in the selected project or solution:

- In Visual Studio 2010, click **Test > Windows > Test View**.
- In Visual Studio 2012 later, click **Test > Windows > Test Explorer**.

**2.** In the **Test View** or the **Test Explorer**, depending on which version of Visual Studio you are using, select the tests that you want to execute.

**3.** Right-click on your selection and click one of the following:

- In Visual Studio 2010, click **Run Selection**.
- In Visual Studio 2012 or later, click **Run Selected Tests**.

To run all tests in the selected project or solution, click **Run All** in the **Test View** or the **Test Explorer**, depending on which version of Visual Studio you are using.

**4.** If you are testing a Web application, the **Select Browser** dialog box opens. Select the browser and click **Run**.

 **Note:** If multiple applications are configured for the current project, the **Select Browser** dialog box is not displayed.

**5.** *Optional:* If necessary, you can press both **Shift** keys at the same time to stop the execution of the test.

**6.** When the test execution is complete, the **Playback Complete** dialog box opens. Click **Explore Results** to examine the results of the tests with TrueLog or click **OK** to close the dialog box.

 **Note:** When you execute your tests, and Visual Studio starts the components that are needed for the execution of the tests, Visual Studio will clean up everything when the test execution is finished, terminating the Open Agent and all open browser windows.

## Running Tests in Parallel

You can use the command line to execute tests against mobile applications in parallel against multiple devices. This functionality is supported for both mobile web and native mobile applications, and can be

used to run tests on physical devices, Android emulators, and iOS simulators. For example, you can use this functionality when executing test from a continuous integration server, or from Silk Central.

To enable parallel test replay, set the environment variable `SILKTEST_ENABLE_PARALLEL_TESTING` to true.

 **Note:** Enabling parallel testing causes the Open Agent to handle each test-executing process separately. Applications which have been tested in one Silk Test client cannot be tested from another client, while the initial client is running. For example, you cannot test the same application alternating between Silk4J and JUnit.

 **Note:** You cannot execute multiple test runs on the same mobile device at the same time. Before running tests in parallel, ensure that enough devices or emulators are available. Any test runs that get no mobile device or emulator assigned will fail.

Each parallel test run starts as a separate MSTest process. Multiple processes starting simultaneously might each try to start the Open Agent on the machine on which Silk4NET is running. Running the Open Agent multiple times on the same machine is not possible and will cause Silk4NET to throw an exception. To avoid this, ensure that the Open Agent is running before starting the parallel test runs.

For example, you could start the Open Agent on the local machine by using the following PowerShell command:

```
powershell.exe -noprofile -command  
\"[System.Reflection.Assembly]::LoadWithPartialName('SilkTest.Ntf');  
[SilkTest.Ntf.Agent]::Connect('localhost')
```

The test results are stored in multiple TrueLog files, one for each test run. To ensure that the TrueLog files are not overwritten, you can add placeholders to the TrueLog file name. For additional information, see [Setting TrueLog Options](#).

 **Note:** If you are experiencing high memory consumption during testing, ensure that test results are saved in the compressed TLZ file format, and not in the XLG format.

## Analyzing Test Results

After running a test, you can review the test results and analyze the success or failure of the test run.

1. Run a Silk4NET test. When the execution is finished, the **Playback Complete** dialog box opens.
2. Click **Explore Results** to examine the results of the tests with TrueLog. Silk TrueLog Explorer opens.
3. Click through the results in Silk TrueLog Explorer.

Silk TrueLog Explorer captures a screenshot whenever a test fails.

## How Does Silk4NET Synchronize Tests?

Many unexpected test failures are related to synchronization issues. Weak synchronization during test replay might generate false negative results, making it difficult to detect actual application problems. Synchronization errors are timing issues that heavily depend on the test environment, making these errors difficult to reproduce and solve. For example, a synchronization error that occurs in a specific test environment might never be reproduced in the development environment. Weak synchronization is one of the most common reasons for an automation project to get unmanageable with a growing set of automated tests.

Silk4NET provides automated *test synchronization* for all supported technologies, enabling you to build robust and manageable test sets. During the replay of a test, Silk4NET ensures that the test always waits until the AUT is ready to perform the next action. For a verification step in a test, Silk4NET ensures that any preceding actions in the test are completed before performing the verification.

To adapt your tests to the specific behavior of your AUT, you can change the values of the following synchronization timeouts:

**Synchronization timeout  
(OPT\_SYNC\_TIMEOUT)**

The maximum time in milliseconds that Silk4NET waits for the AUT to become ready during playback. The default value is 300000 milliseconds.

**Object resolve timeout  
(OBJ\_WAIT\_RESOLVE\_OBJDEF)**

The maximum time in milliseconds that the `Find` method searches for an object. The default value is 5000 milliseconds.

**Object resolve retry interval  
(OPT\_WAIT\_RESOLVE\_OBJDEF\_RETRY)**

If Silk4NET cannot immediately find an object, Silk4NET will retry to find the object until the object resolve timeout expires. The object resolve retry interval specifies the time in milliseconds that Silk4NET waits before retrying to find the object. The default value is 1000 milliseconds.

**Object enabled timeout  
(OPT\_OBJECT\_ENABLED\_TIMEOUT)**

The maximum time in milliseconds that Silk4NET waits for an object to become enabled during playback. The default value is 1000 milliseconds.

 **Note:** The timeouts do not overlap.

For detailed information about the automated synchronization that Silk4NET provides specifically for Web applications, see *Page Synchronization for xBrowser*. For detailed information about the synchronization that Silk4NET provides specifically for Ajax applications, see [How to Synchronize Test Automation Scripts for Ajax Applications](#).

In addition to the automated synchronization, Silk4NET also enables you to manually add wait functions to your scripts. Silk4NET provides the following wait functions for manual synchronization:

**WaitForObject**

Waits for an object that matches the specified locator. Works with an XPath locator or an object map identifier.

**WaitForProperty**

Waits until the property specified by the `propertyName` parameter gets the value specified by the `expectedValue` parameter or until the timeout is reached.

**WaitForDisappearance**

Waits until the object does not exist or until the timeout is reached.

**WaitForChildDisappearance**

Waits until the child object specified by the `locator` parameter does not exist or until the timeout is reached.

If a test randomly fails with an `ObjectNotFoundException`, increase the Object resolve timeout, for example to 30 seconds. For very specific long running operations, for example a click on an object that displays after a long calculation with a progress dialog, manually add the `WaitForObject` method to the test script, to wait until the object is found, or add the `WaitForDisappearance` method to the test script, to wait until the progress dialog is no longer displayed.

**Automated synchronization example**

Consider the following code sample, where Silk4NET tries to click on a button with the caption **Ok**:

```
'VB .NET code
Dim button = _desktop.PushButton("@caption='Ok' ")
button.Click()

// C# code
var button = _desktop.PushButton("@caption='Ok' ");
button.Click();
```

To replay the actions in this code sample, Silk4NET performs the following synchronization actions:

1. Silk4NET tries to find the button. If the Object resolve timeout runs out, Silk4NET stops the replay and throws an exception.
2. Silk4NET waits until the application under test (AUT) is ready. If the Synchronization timeout runs out before the AUT is ready, Silk4NET stops the replay and throws an exception.
3. Silk4NET waits until the button is enabled. If the Object enabled timeout runs out before the button is enabled, Silk4NET stops the replay and throws an exception.
4. Silk4NET clicks the button.
5. Silk4NET waits until the application under test (AUT) is ready again.

## Enabling the Playback Status Dialog Box

Enable the **Playback Status** dialog box to view the actions that are performed during the replay of a test. This dialog box is very useful when replaying tests on another machine, for example on a remote Mac or on a mobile device.

To enable the **Playback Status** dialog box:

1. Click **Silk4NET > Edit Options**.
2. Click the **Replay** tab.
3. To enable the **Playback Status** dialog box, check the **OPT\_SHOW\_PLAYBACK\_STATUS\_DIALOG** check box..
4. To display a video or screenshots of the application under test in the **Playback Status** dialog box, check the **OPT\_PLAYBACK\_STATUS\_DIALOG\_SCREENSHOTS** check box.
5. Click **OK**.



**Note:** If you are testing on a remote Mac or on a mobile device, ensure that the Mac or device does not switch off the screen during testing, otherwise the **Playback Status** dialog box will not display anything.

# Visual Execution Logs with TrueLog

TrueLog is a powerful technology that simplifies root cause analysis of test case failures through visual verification. The results of test runs can be examined in TrueLog Explorer. When an error occurs during a test run, TrueLog enables you to easily locate the line in your script that generated the error so that the issue can be resolved.



**Note:** TrueLog is supported only for one local or remote agent in a script. When you use multiple agents, for example when testing an application on one machine, and that application writes data to a database on another machine, a TrueLog is written only for the first agent that was used in the script. When you are using a remote agent, the TrueLog file is also written on the remote machine.

For additional information about TrueLog Explorer, refer to the *Silk TrueLog Explorer User Guide*, located in (in Microsoft Windows 7) **Start > Programs > Silk > Silk Test > Documentation** or (in Microsoft Windows 10) **Start > Silk**.

You can enable TrueLog in Silk4NET to create visual execution logs during the execution of Silk4NET tests. The TrueLog file is created in the working directory of the process that executed the Silk4NET tests.

The default setting is that screenshots are only created when an error occurs in the script, and only test cases with errors are logged.

## Enabling TrueLog

For new Silk4NET scripts, TrueLog is enabled by default. You can enable or disable TrueLog by checking or un-checking the **Enable TrueLog** check box in the **TrueLog** tab of the **Script Options** dialog box. To open the **Script Options** dialog box, click **Silk4NET > Edit Options**.

To enable TrueLog for existing Silk4NET scripts, which are using the Visual Studio Unit Testing Framework, you have to replace the `TestClass` attribute of all test classes in the script with the `SilkTestClass` attribute.

To enable TrueLog for existing Silk4NET scripts:

1. Open the script that contains the test class for which you want to enable TrueLog.
2. Add the `SilkTestClass` attribute to the test class.

By default, the TrueLog is created in the `TestResults` sub-directory of the directory, in which the Visual Studio solution file and the results of the Visual Studio Unit Testing Framework are located. To specify a different location for the TrueLog, click **Silk4NET > Edit Options** to open the **Script Options** dialog box and click **Browse** to the right of the **TrueLog file** field.

The Visual Studio solution file is the file in which the Silk4NET scripts are located. When the Silk4NET test execution is complete, a dialog box opens, and you can click **Explore Results** to review the TrueLog for the completed test.

### Examples

To enable TrueLog for a class in a Visual Basic script, use the following code:

```
<SilkTestClass(> Public Class MyTestClass
  <TestMethod(> Public Sub MyTest()
    ' my test code
  End Sub
End Sub
```

To enable TrueLog for a class in a C# script, use the following code:

```
[SilkTestClass]
public class MyTestClass {
    [TestMethod]
    public void MyTest() {
        // my test code
    }
}
```

## Changing the Location of the TrueLog

By default, the TrueLog is created in the `TestResults` sub-directory of the directory, in which the Visual Studio solution file and the results of the Visual Studio Unit Testing Framework are located.

To specify another location for the TrueLog:

1. In the menu, click **Silk4NET > Edit Options**. The **Script Options** dialog box displays.
2. Select the **TrueLog** tab.
3. Click **Browse** to the right of the **TrueLog directory** field.

When running a test in the current project, the TrueLog is saved to the specified location.

## Why is TrueLog Not Displaying Non-ASCII Characters Correctly?

TrueLog Explorer is a MBCS-based application, meaning that to be displayed correctly, every string must be encoded in MBCS format. When TrueLog Explorer visualizes and customizes data, many string conversion operations may be involved before the data is displayed.

Sometimes when testing UTF-8 encoded Web sites, data containing characters cannot be converted to the active Windows system code page. In such cases, TrueLog Explorer will replace the non-convertible characters, which are the non-ASCII characters, with a configurable replacement character, which usually is '?'.

To enable TrueLog Explorer to accurately display non-ASCII characters, set the system code page to the appropriate language, for example Japanese.

## Why Does TrueLog Not Write Result Files During Playback?

Silk4NET might display the following error message after playback:

Unable to explore result file because no result file was written. Ensure that you have sufficient permissions and that the unit testing extension in the references of your Silk4NET project corresponds to the used version of Visual Studio.

In this case, the reference to the unit testing extension is pointing to a different version of Visual Studio than the one that you are currently using. For example, this can happen if you have migrated the Silk4NET project from a previous version of Visual Studio. To enable TrueLog to write result files, change the reference to the wrong Visual Studio version so that it points to the correct version. Also ensure that the **Enable TrueLog** check box in the **TrueLog** tab of the **Script Options** dialog box is checked. To open the **Script Options** dialog box, click **Silk4NET > Edit Options**.

**Example**

If the Silk4NET projects reference Visual Studio 2012 and the version that you are using is Visual Studio 2013, remove the reference to `SilkTest.Ntf.VisualStudio2012.UnitTestingExtension` from the Silk4NET projects and add the reference `SilkTest.Ntf.VisualStudio2013.UnitTestingExtension` to the projects.

# Using Silk4NET with Team Foundation Server in Visual Studio 2010

This section describes how you can use Visual Studio Team Foundation Server (TFS) to execute Silk4NET tests in Visual Studio 2010, with Team Foundation Server versions prior to or equal to Team Foundation Server 2013. This functionality is not supported with newer versions of Visual Studio or Team Foundation Server.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

## Executing Silk4NET Tests in TFS



**Note:** For detailed information on the steps in this task that describe functionality of TFS or Visual Studio, refer to the documentation of these products.



**Note:** This functionality is only supported with Visual Studio 2010 and Team Foundation Server versions prior to or equal to Team Foundation Server 2013.

You can execute your Silk4NET tests with TFS. Silk4NET does not have any special requirements on TFS and you do not need to change a Silk4NET project to execute it with TFS. To enable the interaction between Silk4NET and the AUT, implement the instructions given in [How to: Set Up Your Test Agent to Run Tests that Interact with the Desktop](#).

To execute Silk4NET tests, perform the following steps, which might vary slightly depending on your actual setup and the used versions of Visual Studio and TFS. For additional information on the requirements and the configuration of Visual Studio and TFS, refer to the documentation of these products:

1. In Visual Studio, open the **Team Explorer View** and click **Connect to Team Project** to connect to the TFS.
2. In the **Team Explorer View**, add an existing Silk4NET project to the TFS.
3. *Optional:* Add additional Silk4NET tests to your Silk4NET project.
4. In the **Team Explorer View**, check in the tests into the TFS.
5. Locate the solution folder in the solution that includes your Silk4NET project.  
If no solution folder exists, right-click on the solution and click **Add > New Solution Folder** to create the folder.
6. Right-click on the solution folder and click **Add > New Item > Test Settings > Test Settings** to create a new test settings file.
7. *Optional:* In the test settings file, you can configure the test controller that you would like to use to execute the tests under **Roles**.
8. Double click on the new test settings file to edit it and to select appropriate test settings for your needs.
9. In the test settings file, select **Data and diagnostics**.
10. Check **Silk4NET TrueLog** to enable the Silk4NET TrueLog data collector.
11. *Optional:* Under **Roles** in the test settings file, you can configure the test controller that you would like to use to execute the tests.
12. In the **Team Explorer View**, create a new build definition.
13. Add your test settings file to the build definition.
14. Configure the build definition so that automated tests for your Silk4NET test project assembly are run after the build.
15. In the **Team Explorer View**, run the build definition to execute the Silk4NET tests.

16. Once the run is completed, you can review the build run results, including any collected TrueLog files, from TFS.

## Locating TrueLog Files for Silk4NET Tests Executed with TFS



**Note:** This functionality is only supported with Visual Studio 2010 and Team Foundation Server versions prior to or equal to Team Foundation Server 2013.

When you execute Silk4NET tests with TFS, the **Playback Complete** dialog box is not displayed after the execution is finished, and the TrueLog files for the tests are not written on your local machine. Locate the generated TrueLog files to analyze the results of the Silk4NET tests that you have executed with TFS.

If you have enabled the Silk4NET TrueLog data collector, you can perform the following steps to locate the TrueLog files:

1. In the **Team Explorer**, right-click on the build for which you want to locate the TrueLog file.
2. Click **Test run passed**. Under **Collected files** you can see the TrueLog file
3. Double-click on the TrueLog file to download it.

For information on enabling the Silk4NET TrueLog data collector, see *Executing Silk4NET Tests in TFS*.

# Silk Test Open Agent

The Silk Test Open Agent is the software process that translates the commands in your scripts into GUI-specific commands. In other words, the Open Agent drives and monitors the application that you are testing.

One Agent can run locally on the host machine. In a networked environment, any number of Agents can replay tests on remote machines. However, you can record only on a local machine.

## Starting the Silk Test Open Agent

Before you can create a test or run a sample script, the Silk Test Open Agent must be running. Typically, the Agent starts when you launch the product. If you must manually start the Open Agent, perform this step.

Click (in Microsoft Windows 7) **Start > Programs > Silk > Silk Test > Tools > Silk Test Open Agent** or (in Microsoft Windows 10) **Start > Silk > Silk Test Open Agent**. The Silk Test Open Agent icon  displays in the system tray.

## Stopping the Open Agent After Test Execution

You can stop the Open Agent from a script, to ensure that the agent does not continue running after the end of the test execution.

1. Open or create a script that is executed when the test execution is finished.  
For example, open an existing script that is used for cleanup after test execution.
2. Add the `ShutDown` method to the script.



**Note:** The Open Agent will restart as soon as the agent is required by another script.

## Agent Options

This section describes the options that can be manipulated with the `GetOption` and `SetOption` methods.



**Note:** By default, you can set global options by choosing **Silk4NET > Edit Options** in the menu.

To set or get agent options in a script, use the `GetOption` or `SetOption` methods. For instance, when you type, `Agent.SetOption(Options.`, the agent options display automatically in the active editor window with the auto-completion and syntactical assistance technology. For instance, you might see the following options in the active editor window:



An example for inserting an option into a script would be the following:

```
'VB .NET code
Agent.SetOption(Options.ApplicationReadyTimeout, 100000)
```

```
// C# code
Agent.SetOption(Options.ApplicationReadyTimeout, 100000);
```

Alternatively, you can use the agent option name in scripts. For instance, you can type:

```
'VB .NET code
Agent.SetOption("OPT_APPREADY_TIMEOUT", 100000)
```

```
// C# code
Agent.SetOption("OPT_APPREADY_TIMEOUT", 100000);
```

.NET Option Name	Agent Option Name	Constant Type	Description
ApplicationReadyTimeout	OPT_APPREADY_TIMEOUT	NUMBER	Specifies the number of milliseconds to wait for a newly launched application to become ready. If the application is not ready within the specified timeout, Silk4NET raises an exception.
BitmapMatchCount	OPT_BITMAP_MATCH_COUNT	INTEGER	Specifies the number of consecutive snapshots that must be the same for the bitmap to be considered stable. Snapshots are taken up to the number of seconds specified by OPT_BITMAP_MATCH_TIMEOUT, with a pause specified by OPT_BITMAP_MATCH_INTERVAL occurring between each snapshot. By default, this is 0.
BitmapMatchInterval	OPT_BITMAP_MATCH_INTERVAL	REAL	Specifies the time interval between snapshots to use for ensuring the stability of the bitmap image. The snapshots are taken up to the time specified by OPT_BITMAP_MATCH_TIMEOUT. By default, this is 0.1.
BitmapMatchTimeout	OPT_BITMAP_MATCH_TIMEOUT	REAL	Specifies the total time allowed for a bitmap image to become stable. During the time period, Silk4NET takes multiple snapshots of the image, waiting the number of seconds specified with OPT_BITMAP_MATCH_TIMEOUT between snapshots. If the value returned by OPT_BITMAP_MATCH_TIMEOUT is reached before the number of bitmaps specified by OPT_BITMAP_MATCH_COUNT

.NET Option Name	Agent Option Name	Constant Type	Description
BitmapPixelTolerance	OPT_BITMAP_PIXEL_TOLERANCE	INTEGER	<p>match, Silk4NET stops taking snapshots and raises the exception <code>E_BITMAP_NOT_STABLE</code>.</p> <p>By default, this is 5.</p> <p>Specifies the number of pixels of difference below which two bitmaps are considered to match. If the number of pixels that are different is smaller than the number specified with this option, the bitmaps are considered identical. The maximum tolerance is 32767 pixels.</p> <p>By default, this is 0.</p>
ButtonsToCloseWindows	OPT_CLOSE_WINDOW_BUTTONS	LIST OF STRING	<p>Specifies the buttons used to close windows with the <code>CloseSynchron</code> method.</p>
ButtonsToConfirmDialogs	OPT_CLOSE_CONFIRM_BUTTONS	LIST OF STRING	<p>Specifies the buttons used to close confirmation dialog boxes that appear when closing windows with the <code>CloseSynchron</code> method.</p>
CloseUnresponsiveApplications	OPT_KILL_HANGING_APPS	BOOLEAN	<p>Specifies whether unresponsive applications are closed. An application is unresponsive if communication between the Agent and the application fails, e.g. times out. Set this option to <code>TRUE</code> when testing applications that cannot run multiple instances. By default, this is <code>FALSE</code>.</p>
CloseWindowTimeout	OPT_CLOSE_WINDOW_TIMEOUT	NUMBER	<p>Specifies the number of milliseconds to wait before the next close strategy is tried. The Agent executes four close attempts before failing, so the total time before a close fails is four times the value you specify.</p>
Compatibility	OPT_COMPATIBILITY	STRING	<p>Enables you to use the Silk4NET behavior of the specified Silk4NET version for specific features, when the behavior of these features has changed in the latest version.</p> <p>Example strings:</p> <ul style="list-style-type: none"> <li>12</li> <li>11.1</li> <li>13.0.1</li> </ul> <p>By default, this option is not set.</p>
EnsureObjectIsActive	OPT_ENSURE_ACTIVE_OBJECT	BOOLEAN	<p>Ensures that the target object is active. By default, this is <code>FALSE</code>.</p>

.NET Option Name	Agent Option Name	Constant Type	Description
EnableAccessibility	OPT_ENABLE_ACCESSIBILITY	BOOLEAN	<p>TRUE to enable Accessibility when you are testing a Win32 application and Silk4NET cannot recognize objects. Accessibility is designed to enhance object recognition at the class level.</p> <p>FALSE to disable Accessibility.</p> <p>By default, this is FALSE.</p> <p> <b>Note:</b> For Mozilla Firefox and Google Chrome, Accessibility is always activated and cannot be deactivated.</p>
HighlightObjectDuringPlayback	OPT_REPLAY_HIGHLIGHT	BOOLEAN	<p>Specifies whether the current object is highlighted during playback.</p> <p>By default, this is FALSE, which means that objects are not highlighted by default.</p>
KeyboardEventDelay	OPT_KEYBOARD_INPUT_DELAY	NUMBER	<p>Sets the delay in milliseconds between playback of keyboard strokes.</p> <p>Be aware that the optimal number you select can vary, depending on the application that you are testing. For example, if you are testing a Web application, a setting of 1 millisecond radically slows down the browser. However, setting this to 0 (zero) may cause basic application testing to fail.</p>
KeysToCloseDialogs	OPT_CLOSE_DIALOG_KEYS	LIST OF STRING	<p>Specifies the keystroke sequence to close dialog boxes that open after trying to close a window with the <code>CloseSynchron</code> method. Examples include: &lt;ESC&gt;, &lt;Alt+F4&gt;.</p>
LocatorAttributesCaseSensitive	OPT_LOCATOR_ATTRIBUTES_CASE_SENSITIVE	BOOLEAN	<p>Set to <code>Yes</code> to add case-sensitivity to locator attribute names, or to <code>No</code> to match the locator names case insensitive. The names of locator attributes for mobile Web applications are always case insensitive, and this option is ignored when recording or replaying mobile Web applications.</p>
MenuItemsToCloseWindows	OPT_CLOSE_WINDOW_MENUS	LIST OF STRING	<p>Specifies the menu items used to close windows with the <code>CloseSynchron</code> method. Examples include: "File/Exit*", "File/Quit*".</p>
MouseEventDelay	OPT_MOUSE_INPUT_DELAY	NUMBER	<p>Specifies the delay in milliseconds used before each mouse event.</p>

.NET Option Name	Agent Option Name	Constant Type	Description
ObjectResolveRetryTimeout	OPT_WAIT_RESOLVE_OBJDEF	NUMBER	Specifies the time in milliseconds to wait for an object to be resolved during playback. As soon as the object is resolved, Silk4NET can recognize it.
PlaybackMode	OPT_REPLAY_MODE	NUMBER	<p>Defines how controls are replayed. Use low level to replay each control using the mouse and keyboard. Use high level to use the API to replay each control. All controls have a default playback mode assigned. When the default replay mode is selected, each control uses its default playback mode. The default mode delivers the most reliable results. Selecting low or high level playback overrides the playback mode of all controls with the playback mode selected.</p> <p>Possible values include 0, 1 and 2. 0 is default, 1 is high level, 2 is low level. By default, this is 0.</p>
PostReplayDelay	OPT_POST_REPLAY_DELAY	NUMBER	Specifies the time in milliseconds to wait after invoking a function or setting a property.
RemoveFocusOnCaptureText	OPT_REMOVE_FOCUS_ON_CAPTURE_TEXT	BOOLEAN	<p>Set to <i>Yes</i> to take the focus off the application under test during a text capture. By default, this is set to <i>No</i>, leaving the focus on the application under test. A text capture is performed during recording and replay by the following methods:</p> <ul style="list-style-type: none"> <li>• <code>TextClick</code></li> <li>• <code>TextCapture</code></li> <li>• <code>TextExists</code></li> <li>• <code>TextRect</code></li> </ul>
SyncTimeout	OPT_SYNC_TIMEOUT	NUMBER	<p>Specifies the maximum time in milliseconds for an object to be ready.</p> <p> <b>Note:</b> When you upgrade from a Silk Test version prior to Silk Test 13.0, and you had set the <code>OPT_XBROWSER_SYNC_TIMEOUT</code> option, the <b>Options</b> dialog box will display the default value of the <code>OPT_SYNC_TIMEOUT</code>, although your timeout is still set to the value you have defined.</p>

.NET Option Name	Agent Option Name	Constant Type	Description
TransparentClasses	OPT_TRANSPARENT_CLASSES	LIST OF STRING	<p>To simplify the object hierarchy and to shorten the length of the lines of code in your test scripts and functions, you can suppress the controls for certain unnecessary classes in the following technologies:</p> <ul style="list-style-type: none"> <li>• Win32.</li> <li>• Java AWT/Swing.</li> <li>• Java SWT/Eclipse.</li> <li>• Windows Presentation Foundation (WPF).</li> </ul> <p>Specify the names of any classes that you want to ignore during recording and playback.</p>
	OPT_WPF_CHECK_DISPATCHER_FOR_IDLE	BOOLEAN	<p>For some WPF applications the Silk Test synchronization might not work due to how certain controls are implemented, resulting in Silk4NET not recognising when the WPF application is idle. Setting this option to FALSE disables the WPF synchronization and prevents Silk4NET from checking the WPF dispatcher, which is the thread that controls the WPF application. Set this option to FALSE to solve synchronization issues with certain WPF applications. By default, this is TRUE.</p>
WPFCustomClasses	OPT_WPF_CUSTOM_CLASSES	LIST OF STRING	<p>Specify the names of any WPF classes that you want to expose during recording and playback. For example, if a custom class called <i>MyGrid</i> derives from the WPF <i>Grid</i> class, the objects of the <i>MyGrid</i> custom class are not available for recording and playback. <i>Grid</i> objects are not available for recording and playback because the <i>Grid</i> class is not relevant for functional testing since it exists only for layout purposes. As a result, <i>Grid</i> objects are not exposed by default. In order to use custom classes that are based on classes that are not relevant to functional testing, add the custom class, in this case <i>MyGrid</i>, to the <b>OPT_WPF_CUSTOM_CLASSES</b> option. Then you can record, playback, find, verify properties, and perform any</p>

.NET Option Name	Agent Option Name	Constant Type	Description
WPFPrefillItems	OPT_WPF_PREFILL_ITEMS	BOOLEAN	<p>other supported actions for the specified classes.</p> <p>Defines whether items in a <code>WPFFItemsControl</code>, like <code>WPFFComboBox</code> or <code>WPFFListBox</code>, are pre-filled during recording and playback. WPF itself lazily loads items for certain controls, so these items are not available for Silk4NET if they are not scrolled into view. Turn pre-filling on, which is the default setting, to additionally access items that are not accessible without scrolling them into view. However, some applications have problems when the items are pre-filled by Silk4NET in the background, and these applications can therefore crash. In this case turn pre-filling off.</p>
XBrowserFindHiddenInputFields	OPT_XBROWSER_FIND_HIDDEN_INPUT_FIELDS	BOOLEAN	<p>Specifies whether to display hidden input fields, which are HTML fields for which the tag includes <code>type="hidden"</code>. The default value is <code>TRUE</code>.</p>
XBrowserSynchronizationMode	OPT_XBROWSER_SYNC_MODE	STRING	<p>Configures the supported synchronization mode for HTML or AJAX. Using the HTML mode ensures that all HTML documents are in an interactive state. With this mode, you can test simple Web pages. If more complex scenarios with Java script are used, it might be necessary to manually script synchronization functions, such as <code>WaitForObject</code>, <code>WaitForProperty</code>, <code>WaitForDisappearance</code>, or <code>WaitForChildDisappearance</code>. Using the AJAX mode eliminates the need to manually script synchronization functions. By default, this value is set to <b>AJAX</b>.</p>
XBrowserSynchronizationTimeout	OPT_XBROWSER_SYNC_TIMEOUT	NUMBER	<p>Specifies the maximum time in milliseconds for an object to be ready.</p> <p> <b>Note:</b> Deprecated. Use the option <code>OPT_SYNC_TIMEOUT</code> instead.</p>
XBrowserSynchronizationURLExcludes	OPT_XBROWSER_SYNC_EXCLUDE_URLS	STRING	<p>Specifies the URL for the service or Web page that you want to exclude during page synchronization. Some</p>

.NET Option Name	Agent Option Name	Constant Type	Description
			<p>AJAX frameworks or browser applications use special HTTP requests, which are permanently open in order to retrieve asynchronous data from the server. These requests may let the synchronization hang until the specified synchronization timeout expires. To prevent this situation, either use the HTML synchronization mode or specify the URL of the problematic request in the <b>Synchronization exclude list</b> setting.</p> <p>Type the entire URL or a fragment of the URL, such as <i>http://test.com/timeService</i> or <i>timeService</i>.</p> <p>Separate entries by comma, for example:</p> <pre>'VB .NET code Agent.SetOption(OPT_XBROWSER_SYNC_EXCLUDE_URLS, { "fpdownload.macromedia.com", "fpdownload.adobe.com", "download.microsoft.com" })  // C# code Agent.SetOption(OPT_XBROWSER_SYNC_EXCLUDE_URLS, { "fpdownload.macromedia.com", "fpdownload.adobe.com", "download.microsoft.com" });</pre>

## Open Agent Port Numbers

When the Open Agent starts, a random available port is assigned to Silk4NET and to the application that you are testing. The port numbers are registered on the information service. Silk4NET contacts the information service to determine the port to use to connect to the Open Agent. The information service communicates the appropriate port, and Silk4NET connects to that port. Communication runs directly between Silk4NET and the agent.

By default, the Open Agent communicates with the information service on port 22901. You can configure additional ports for the information service as alternate ports that work when the default port is not available. By default, the information service uses ports 2966, 11998, and 11999 as alternate ports.

Typically, you do not have to configure port numbers manually. However, if you have a port number conflict or an issue with a firewall, you must configure the port number for that machine or for the information service. You can use a different port number for a single machine or you can use the same available port number for all your machines.

# Configuring the Port to Connect to the Information Service

Before you begin this task, stop the Silk Test Open Agent.

Typically, you do not have to configure port numbers manually. The information service handles port configuration automatically. Use the default port of the information service to connect to the Agent. Then, the information service forwards communication to the port that the Agent uses.

The default port of the information service is 22901. When you can use the default port, you can type `hostname` without the port number for ease of use. If you do specify a port number, ensure that it matches the value for the default port of the information service or one of the additional information service ports. Otherwise, communication will fail.

If necessary, you can change the port number that all clients use to connect to the information service.

1. Navigate to the `infoservice.properties.sample` file and open it.

- On a Windows system, this file is located in `C:\ProgramData\Application Data\Silk\SilkTest\conf`, where “`C:\ProgramData`” is equivalent to the content of the `ALLUSERSPROFILE` environment variable, which is set by default on Windows systems.
- On macOS, this file is located in `/Users/<user>/.silk/silktest/conf`.

This file contains commented text and sample alternate port settings.

2. Change the value for the appropriate port.

Typically, you configure the information service port settings to avoid problems with a firewall by forcing communication on a specific port.

Port numbers can be any number from 1 to 65535.

- `infoservice.default.port` – The default port where the information service runs. By default, this port is set to 22901.

3. Save the file as `infoservice.properties`.

4. Restart the Open Agent, the Silk Test client, and the application that you want to test.

# Configuring the Port to Connect to the Open Agent

Before you begin this task, stop the Silk Test Open Agent.

Typically, you do not have to configure port numbers manually. The information service handles port configuration automatically. Use the default port of the information service to connect to the Agent. Then, the information service forwards communication to the port that the Agent uses.

If necessary, change the port number that the Silk Test client or the application that you want to test uses to connect to the Open Agent.

1. Navigate to the `agent.properties.sample` file and open it.

By default, this file is located at: `%APPDATA%\Silk\SilkTest\conf`, which is typically `C:\Users\<user name>\AppData\Silk\SilkTest\conf` where `<user name>` equals the current user name.

2. Change the value for the appropriate port.

Typically, you configure port settings to resolve a port conflict.



**Note:** Each port number must be unique. Ensure that the port numbers for the Agent differ from the information service port settings.

Port numbers can be any number from 1 to 65535.

Port settings include:

- `agent.vtadapter.port` – Controls communication between Silk Test Workbench and the Open Agent when running tests.
- `agent.xpmodule.port` – Controls communication between Silk Test Classic and the Agent when running tests.
- `agent.autcommunication.port` – Controls communication between the Open Agent and the application that you are testing.
- `agent.rmi.port` – Controls communication with the Open Agent and Silk4J.
- `agent.ntfadapter.port` – Controls communication with the Open Agent and Silk4NET.



**Note:** The ports for Apache Flex testing are not controlled by this configuration file. The assigned port for Flex application testing is 6000 and increases by 1 for each Flex application that is tested. You cannot configure the starting port for Flex testing.

3. Save the file as `agent.properties`.
4. Restart the Open Agent, the Silk Test client, and the application that you want to test.

## Configuring the Port to Connect to Silk Test Recorder

Before you begin this task, stop the Silk Test Open Agent.

Typically, you do not have to configure port numbers manually. The information service handles port configuration automatically. Use the default port of the information service to connect to the Agent. Then, the information service forwards communication to the port that the Agent uses.

If necessary, change the port number that Silk Test Classic, Silk4J, or Silk4NET uses to connect to Silk Test Recorder.

1. Navigate to the `recorder.properties.sample` file and open it.

By default, this file is located at: `%APPDATA%\Silk\Silk Test\conf`, which is typically `C:\Documents and Settings\\AppData\Silk\SilkTest\conf` where `<user name>` equals the current user name.

2. Change the `recorder.api.rmi.port` to the port that you want to use.

Port numbers can be any number from 1 to 65535.



**Note:** Each port number must be unique. Ensure that the port numbers for the Agent settings differ from the recorder and the information service port settings.

3. Save the file as `recorder.properties`.
4. Restart the Open Agent, the Silk Test client, and the application that you want to test.

## Remote Testing with the Open Agent

You can install Silk4NET on a remote machine and test an application on this remote location from the Silk4NET that is installed on your local machine.



**Note:** If you want to test mobile applications on a mobile device that is connected to a remote machine or on an Emulator or Simulator on a remote machine, or web applications on Apple Safari or on a remote Microsoft Edge, you have to use a remote Silk Test information service instead of a remote Open Agent.

## Testing with a Remote Open Agent

To replay tests against an application on a remote machine with Silk4NET, perform the following actions:

1. Create a test against the application on the local machine.

2. Install the Open Agent on the remote machine.

For additional information, refer to the [Silk Test Installation Guide](#).

3. Start the Open Agent on the remote machine.

4. In the test script, use the `Connect` method of the `Agent` class to connect to the remote Open Agent.

For example, add the following line to the script:

```
// VB .NET code
Private agent As RemoteAgent = Agent.Connect("hostname:port")
```

```
// C# code
private RemoteAgent agent = Agent.Connect("hostname:port");
```

For additional information, see *Testing Applications in Multiple UI Sessions on a Single Machine*.

5. To execute a command in the test script on the remote machine, add the agent to the command.

For example, if the command in the local test script was `SomeAgentFunction`, change the command to the following:

```
// VB .NET code
Dim d As Desktop = agent.Desktop
Dim baseState = New BaseState()
agent.ExecuteBaseState(basestate)
d.SomeAgentFunction()
```

```
// C# code
Desktop d = agent.Desktop;
BaseState basestate = new BaseState();
agent.ExecuteBaseState(basestate);
d.SomeAgentFunction();
```

## Configuring the Open Agent to Run Remotely in a NAT Environment

To remotely run the Open Agent in a network address translation (NAT) environment, such as on a Lab Manager virtual machine (VM), configure the Agent to include a VM argument.

1. Navigate to the `agent.properties.sample` file and open it.

By default, this file is located at: `%APPDATA%\Silk\SilkTest\conf`, which is typically `C:\Documents and Settings\\Application Data\Silk\SilkTest\conf`.

2. Add the following property:

```
java.rmi.server.hostname=<external IP of VM>
```

3. Save the file as `agent.properties`.

# Base State

An application's base state is the known, stable state that you expect the application to be in before each test case begins execution, and the state the application can be returned to after each test case has ended execution. This state may be the state of an application when it is first started.

When you create a class for an application, Silk4NET automatically creates a base state.

Base states are important because they ensure the integrity of your tests. By guaranteeing that each test case can start from a stable base state, you can be assured that an error in one test case does not cause subsequent test cases to fail.

Silk4NET automatically ensures that your application is at its base state during the following stages:

- Before a test runs
- During the execution of a test
- After a test completes successfully



**Note:** Silk4NET stores the base state and any Silk4NET options in the `config.silk4net` configuration file. Silk4NET creates such a file for each Silk4NET project.



**Note:** Do not add more than one browser application configuration when testing a web application with a defined base state.

## Modifying the Base State

You can change the executable location, working directory, locator, or URL of the base state if necessary. For example, if you want to launch tests from a production Web site that were previously tested on a testing Web site, change the base state URL and the tests will run in the new environment.

1. Click **Silk4NET** and choose **Edit Application Configurations**. The **Edit Application Configurations** dialog box opens and lists the existing application configurations.
2. Click **Edit** to the right of the application configuration that you want to change.
3. If you are testing a desktop application, type the executable name and file path of the desktop application that you want to test into the **Executable Pattern** text box.  
For example, you might type `*\calc.exe` to specify the Calculator.
4. If you are testing a desktop application and you want to use a command line pattern in combination with the executable file, type the command line pattern into the **Command Line Pattern** text box.
5. If you are testing a web site, type the address of the web application that you want to test into the **Url to navigate** text box.
6. If you are testing a web site and you want to change the default browser, click **Change** to open the **Select Application** dialog box and then select the browser that you want to use.
7. If you are testing a web site or a mobile native application on a remote location, for example on a mobile device that is connected to a Mac, and you want to edit the remote location, click **Change** to open the **Select Application** dialog box and then click **Edit Remote Locations**.
8. If you are testing a mobile application or a web application on Apple Safari, type the connection string into the **Connection String** text box.  
For additional information, see [Connection String](#).
9. If you are testing a mobile native application, specify the name of the mobile application that you want to test in the **Mobile app** text box.
10. Click **OK**.

11.If the application under test usually takes a long time to start, increase the application ready timeout in the replay options.

## Running the Base State

Before starting to record a test against an application, you can execute the base state to bring all applications, against which you want to record, to the appropriate state for recording.

To run the base state:

Click **Silk4NET > Run Base State**.

Depending on the type of the application, Silk4NET performs the following actions:

- Executes the application configurations of all applications, for which an application configuration is defined in the current project.
- For web applications, Silk4NET opens the web application in the specified browser and to the specified URL.
- For mobile web applications, Silk4NET opens the specified browser on the specified mobile device or Emulator to the specified URL.
- For mobile native applications, Silk4NET opens the specified app on the specified mobile device or Emulator. If the specified app is not installed on the specified mobile device or Emulator, Silk4NET installs and then opens the app.

# Application Configuration

An application configuration defines how Silk4NET connects to the application that you want to test. Silk4NET automatically creates an application configuration when you create the base state. However, at times, you might need to modify, remove, or add an additional application configuration. For example, if you are testing an application that modifies a database and you use a database viewer tool to verify the database contents, you must add an additional application configuration for the database viewer tool.

- For a Windows application, an application configuration includes the following:
  - Executable pattern  
All processes that match this pattern are enabled for testing. For example, the executable pattern for Internet Explorer is `*\IEXPLORE.EXE`. All processes whose executable is named `IEXPLORE.EXE` and that are located in any arbitrary directory are enabled.
  - Command line pattern  
The command line pattern is an additional pattern that is used to constrain the process that is enabled for testing by matching parts of the command line arguments (the part after the executable name). An application configuration that contains a command line pattern enables only processes for testing that match both the executable pattern and the command line pattern. If no command-line pattern is defined, all processes with the specified executable pattern are enabled. Using the command line is especially useful for Java applications because most Java programs run by using `javaw.exe`. This means that when you create an application configuration for a typical Java application, the executable pattern, `*\javaw.exe` is used, which matches any Java process. Use the command line pattern in such cases to ensure that only the application that you want is enabled for testing. For example, if the command line of the application ends with `com.example.MyMainClass` you might want to use `*com.example.MyMainClass` as the command line pattern.
- For a Web application in a desktop browser on the local machine, an application configuration includes only the browser type.
- For a Web application in Apple Safari or in Microsoft Edge on a remote machine, an application configuration includes the following:
  - Browser type.
  - Connection string.
- For a Web application in a mobile browser, an application configuration includes the following:
  - Browser type.
  - Connection string.
- For a native mobile application, an application configuration includes the following:
  - Connection string.
  - Simple application name. If multiple applications on the mobile device have the same name, the fully qualified name of the application is used.



**Note:** Do not add more than one browser application configuration when testing a web application with a defined base state.

## Modifying an Application Configuration

An application configuration defines how Silk4NET connects to the application that you want to test. Silk4NET automatically creates an application configuration when you create the base state. However, at times, you might need to modify, remove, or add an additional application configuration. For example, if you

are testing an application that modifies a database and you use a database viewer tool to verify the database contents, you must add an additional application configuration for the database viewer tool.

1. Click **Silk4NET** and choose **Edit Application Configurations**. The **Edit Application Configurations** dialog box opens and lists the existing application configurations.
2. To add an additional application configuration, click **Add application configuration**.



**Note:** Do not add more than one browser application configuration when testing a web application with a defined base state.

The **Select Application** dialog box opens. Select the tab and then the application that you want to test and click **OK**.

3. To remove an application configuration, click **Remove** next to the appropriate application configuration.
4. To edit an application configuration, click **Edit**.
5. If you are testing a desktop application, type the executable name and file path of the desktop application that you want to test into the **Executable Pattern** text box.  
For example, you might type `*\calc.exe` to specify the Calculator.
6. If you are testing a desktop application and you want to use a command line pattern in combination with the executable file, type the command line pattern into the **Command Line Pattern** text box.
7. If you are testing a web application, type the web address for the web page to launch when a test begins into the **Url to navigate** text box.
8. If you are testing a mobile application or a web application on Apple Safari, type the connection string into the **Connection String** text box.  
For additional information, see [Connection String](#).
9. Click **OK**.

## Select Application Dialog Box

Use the **Select Application** dialog box to select the application that you want to test, to associate an application with an object map, or to add an application configuration to a test. Application types are listed in tabs on the dialog box. Select the tab for the application type you want to use.

**Windows** Lists all Microsoft Windows applications that are running on the system. Select an item from the list and click **OK**.

Use the **Hide processes without caption** check box to filter out applications that have no caption.

**Web** Lists all available browsers, including mobile browsers on any connected mobile devices and Apple Safari on a Mac. Specify the Web page to open in the **Enter URL to navigate** text box. If an instance of the selected browser is already running, you can click **Use URL from running browser** to record against the URL currently displayed in the running browser instance.



**Note:** Do not add more than one browser application configuration when testing a web application with a defined base state.

**Mobile** Lists all available mobile devices and all running Android emulators, including devices connected to a remote location. Select this tab to test mobile native applications. You can select to test the mobile application (app) that is currently running on the selected mobile device, or you can browse for or manually specify the name or file of the app that you want to test.

# Editing Remote Locations

You can use the **Remote Locations** dialog box to add any browsers and mobile devices on a remote location to the set of applications that you can test.

1. Click **Silk4NET > Edit Remote Locations**. The **Remote Locations** dialog box appears.
2. To add an additional remote location, perform the following actions:
  - a) Click on the arrow to the right of **Add Location** to specify whether you want to add a remote location which is using the Silk Test Information Service, or Silk Central.



**Note:** You can only configure one Silk Central as a remote location. If you have already configured the integration with Silk Central, Silk Central is listed in the remote locations list.

- b) Click **Add Location**. The **Add Location** dialog box appears.
  - c) Type the URL of the remote location and the port through which Silk4NET connects to the information service on the remote machine into the **Host** field.  
The default port is 22901.
  - d) *Optional:* Edit the name of the remote location in the **Name** field.
3. To edit an existing remote location, click **Edit**.
  4. To remove a remote location, click **Remove**.
  5. *Optional:* To reduce the amount of browsers and devices in the **Select Application** dialog, click **Do not show devices and browsers from this location**. The installed browsers and connected devices of the remote location will no longer be displayed in the **Select Application** dialog. By default, all installed browsers and connected devices of all remote locations are displayed in the **Select Application** dialog.
  6. By default, remote locations are saved to %APPDATA%\Silk\SilkTest\conf\remoteLocations.xml. To change the file in which the remote locations are saved, for example to share the file with other team members, perform the following actions:
    - a) Click **Sharing Options**. The **Sharing Options** dialog box appears.
    - b) Click **Save to shared file**.
    - c) Click **Browse** to select the file.You could also set the full path to the remote locations in a file named `remoteLocationsFileLocation.properties`, for example if you want to use a file that is located in a repository. For example, to use the remote locations that are specified in the file `remoteLocations.xml`, under `C:\mySources`, create a file with the name `remoteLocationsFileLocation.properties` in the folder `%APPDATA%\Silk\SilkTest\conf\` and type `fileLocation=C:\mySources\remoteLocations.xml` into the file.
  7. To load a set of already configured remote locations from a shared file, for example to use remote locations that have been specified by another team member, perform the following actions:
    - a) Click **Sharing Options**. The **Sharing Options** dialog box appears.
    - b) Click **Load from shared file**.
    - c) Click **Browse** to select the file.
  8. Click **OK**.

When you have added a remote location, the browsers that are installed on the remote location, including Apple Safari on a Mac, are available in the **Web** tab of the **Select Application** dialog box, and the mobile devices that are connected to the remote location are available in the **Mobile** tab of the **Select Application** dialog box.

# Application Configuration Errors

When the program cannot attach to an application, the following error message opens:  
Failed to attach to application <Application Name>. For additional information, refer to the Help.

In this case, one or more of the issues listed in the following table may have caused the failure:

Issue	Reason	Solution
Time out	<ul style="list-style-type: none"> <li>The system is too slow.</li> <li>The size of the memory of the system is too small.</li> </ul>	Use a faster system or try to reduce the memory usage on your current system.
User Account Control (UAC) fails	You have no administrator rights on the system.	Log in with a user account that has administrator rights.
Command-line pattern	The command-line pattern is too specific. This issue occurs especially for Java. The replay may not work as intended.	Remove ambiguous commands from the pattern.
<ul style="list-style-type: none"> <li>The <b>Select Browser</b> dialog box does not display when running a test against a Web application.</li> <li>Multiple browser instances are started when running a test against a Web application.</li> <li>When running a test against a Web application with a browser instance open, Silk4NET might stop working.</li> </ul>	A base state and multiple browser application configurations are defined for the test case.	Remove all browser application configurations except one from the test case.
Playback error when running a test	<p>No application configuration is defined for the test.</p> <p>The following exception might be displayed:</p> <pre>No application configuration present.</pre>	<ul style="list-style-type: none"> <li>When running a keyword-driven test, ensure that a keyword which executes the base state is included in the test.</li> <li>Ensure that an application configuration is configured for the current project.</li> </ul>

## Troubleshooting Application Configurations

### Why is my application not displayed in the Select Application dialog box

- Uncheck the **Hide processes without caption** check box. This check box is checked by default and prevents applications without a caption from being displayed in the dialog box.
- Run Silk4NET with elevated privileges.
  - Close Silk4NET.
  - Stop the Open Agent.
  - Run Silk4NET as an administrator.
- Use the **Task Manager** to check if the application is running under a different user account.

- Ensure that the application is not started with the `runas` command or a similar command.

## Creating a Test that Tests Multiple Applications

You can test multiple applications with a single test script. To create such a test script, you need to add an application configuration for each application that you want to test to the project in which the script resides.

1. Record or manually script a test for the primary application that you want to test.
2. Click **Silk4NET** and choose **Edit Application Configurations**. The **Edit Application Configurations** dialog box opens and lists the existing application configurations.
3. To add an additional application configuration, click **Add application configuration**.



**Note:** Do not add more than one browser application configuration when testing a web application with a defined base state.

The **Select Application** dialog box opens. Select the tab and then the application that you want to test and click **OK**.

4. Click **OK**.
5. Record or manually script additional actions into the script using the new application configuration.



**Note:** Do not add more than one browser application configuration when testing a web application with a defined base state.

# Setting Script Options

Specify script options for recording, browser and custom attributes, classes to ignore, synchronization, and the replay mode.



**Note:** For each Silk4NET project, Silk4NET creates the `config.Silk4net` configuration file. Silk4NET stores the base state of the application under test and all options in this file. The options are then used during replay.

## Setting TrueLog Options

Enable TrueLogs to capture bitmaps and to log information for Silk4NET.

Logging bitmaps and controls in TrueLogs may adversely affect the performance of Silk4NET. Because capturing bitmaps and logging information can result in large TrueLog files, you may want to log test cases with errors only and then adjust the TrueLog options for test cases where more information is needed.

The results of test runs can be examined in TrueLog Explorer. For additional information, refer to the [Silk TrueLog Explorer Help for Silk Test](#).



**Note:** To reduce the size of TrueLog files with Silk Test 17.5 or later, the file format for TrueLog files has changed from `.xlg` to the compressed `.tlz` file format. Files with a `.xlg` suffix are automatically appended with a `.tlz` suffix. To parse result data from a `.tlz` file, you can unzip the `.tlz` file and parse the data from the included `.xlg` file.

To enable TrueLog and customize the information that the TrueLog collects for Silk4NET, perform the following steps:

1. Click **Silk4NET > Edit Options**. The **Script Options** dialog box opens.
2. Click the **TrueLog** tab.
3. In the **TrueLog location** field, type the name of and optionally the path to the TrueLog file, or click **Browse** and select the file.
4. Select the **Screenshot mode**.  
Default is **On Error**.
5. *Optional:* Set the **Delay**.  
This delay gives the operating system time to draw the application window before a bitmap is taken. You can try to add a delay if your application is not drawn properly in the captured bitmaps.
6. Click **OK**.

## Setting Recording Preferences

Set the shortcut key combination to pause recording and specify whether absolute values and mouse move actions are recorded.



**Note:** All the following settings are optional. Change these settings if they will improve the quality of your test methods.

1. Click **Silk4NET > Edit Options**.
2. Click the **Recording** tab.
3. To set `Ctrl+Shift` as the shortcut key combination to use to pause recording, check the **OPT\_ALTERNATE\_RECORD\_BREAK** check box.

By default, `Ctrl+Alt` is the shortcut key combination.

4. To record absolute values for scroll events, check the **OPT\_RECORD\_SCROLLBAR\_ABSOLUT** check box.
5. To record mouse move actions for Web applications, Win32 applications, and Windows forms applications, check the **OPT\_RECORD\_MOUSEMOVES** check box. You cannot record mouse move actions for child technology domains of the xBrowser technology domain, for example Apache Flex and Swing.
6. If you record mouse move actions, in the **OPT\_RECORD\_MOUSEMOVE\_DELAY** text box, specify how many milliseconds the mouse has to be motionless before a `MouseMove` is recorded.  
By default this value is set to 200.
7. To record text clicks instead of `Click` actions on objects where `TextClick` actions usually are preferable to `Click` actions, check the **OPT\_RECORD\_TEXT\_CLICK** check box.
8. To record image clicks instead of `Click` actions on objects where `ImageClick` actions usually are preferable to `Click` actions, check the **OPT\_RECORD\_IMAGE\_CLICK** check box.
9. To define whether you want to record object map entries or XPath locators, select the appropriate recording mode from the **OPT\_RECORD\_OBJECTMAPS\_MODE** list:
  - **Object map entries for new and existing objects.** This is the default mode.
  - **XPath locators for new and existing objects.**
  - **XPath locators for new objects only.** For objects that already exist in an object map, the object map entry is reused. Choosing this setting enables you to create object maps for the main controls of an AUT, and to persist these object maps while creating additional tests against the AUT.
10. To resize the application under test (AUT) when a recording session starts, check the **OPT\_RESIZE\_APPLICATION\_BEFORE\_RECORDING** check box.  
This check box is checked by default, enabling the recording sidebar to display next to the AUT. When this check box is unchecked, the AUT and the recording sidebar might overlap.
11. Click **OK**.

## Setting Browser Recording Options

Specify browser attributes to ignore while recording and whether to record native user input instead of DOM functions.



**Note:** All the following settings are optional. Change these settings if they will improve the quality of your test methods.

1. Click **Silk4NET > Edit Options**. The **Script Options** dialog box opens.
2. Click the **Browser** tab.
3. In the **Locator attribute name exclude list** grid, type the attribute names to ignore while recording. For example, if you do not want to record attributes named `height`, add the `height` attribute name to the grid.  
Separate attribute names with a comma.
4. In the **Locator attribute value exclude list** grid, type the attribute values to ignore while recording. For example, if you do not want to record attributes assigned the value of `x-auto`, add `x-auto` to the grid.  
Separate attribute values with a comma.
5. To record native user input instead of DOM functions, check the **OPT\_XBROWSER\_RECORD\_LOWLEVEL** check box.  
For example, to record `Click` instead of `DomClick` and `TypeKeys` instead of `SetText`, check this check box.  
If your application uses a plug-in or AJAX, use native user input. If your application does not use a plug-in or AJAX, we recommend using high-level DOM functions, which do not require the browser to be

focused or active during playback. As a result, tests that use DOM functions are faster and more reliable.

6. To set the maximum length for locator attribute values, type the length into the field in the **Maximum attribute value length** section.

If the actual length exceeds that limit the value is truncated and a wild card (\*) is appended. By default this value is set to 20 characters.

7. To automatically search for an unobstructed click spot on the specified target element, check the **OPT\_XBROWSER\_ENABLE\_SMART\_CLICK\_POSITION** check box.
8. Click **OK**.

## Setting Custom Attributes

Silk4NET includes a sophisticated locator generator mechanism that guarantees locators are unique at the time of recording and are easy to maintain. Depending on your application and the frameworks that you use, you might want to modify the default settings to achieve the best results. You can use any property that is available in the respective technology as a custom attribute given that they are either numbers (integers, doubles), strings, item identifiers, or enumeration values.

A well-defined locator relies on attributes that change infrequently and therefore requires less maintenance. Using a custom attribute is more reliable than other attributes like caption or index, since a caption will change when you translate the application into another language, and the index might change when another object is added.

For the technology domains listed in the list box on the **Custom Attributes** tab, you can also retrieve arbitrary properties (such as a WPFButton that defines *myCustomProperty*) and then use those properties as custom attributes. To achieve optimal results, add a custom automation ID to the elements that you want to interact with in your test. In Web applications, you can add an attribute to the element that you want to interact with, such as `<div myAutomationId= "my unique element name" />`. Or, in Java SWT, the developer implementing the GUI can define an attribute (for example `testAutomationId`) for a widget that uniquely identifies the widget in the application. A tester can then add that attribute to the list of custom attributes (in this case, `testAutomationId`), and can identify controls by that unique ID. This approach can eliminate the maintenance associated with locator changes.

If multiple objects share the same attribute value, such as a caption, Silk4NET tries to make the locator unique by combining multiple available attributes with the "and" operation and thus further narrowing down the list of matching objects to a single object. Should that fail, an index is appended. Meaning the locator looks for the *n*th control with the caption xyz.

If more than one object is assigned the same custom attribute value, all the objects with that value will return when you call the custom attribute. For example, if you assign the unique ID, `loginName` to two different text fields, both fields will return when you call the `loginName` attribute.

1. Click **Silk4NET > Edit Options**. The **Script Options** dialog box opens.
2. Click the **Custom Attributes** tab.
3. From the **Select a tech domain** list box, select the technology domain for the application that you are testing.



**Note:** You cannot set custom attributes for Flex or Windows API-based client/server (Win32) applications.

4. Add the attributes that you want to use to the list.

If custom attributes are available, the locator generator uses these attributes before any other attribute. The order of the list also represents the priority in which the attributes are used by the locator generator. If the attributes that you specify are not available for the objects that you select, Silk4NET uses the default attributes for the application that you are testing.

Separate attribute names with a comma.

 **Note:** To include custom attributes in a Web application, add them to the html tag. For example type, `<input type='button' bcauid='abc' value='click me' />` to add an attribute called `bcauid`.

 **Note:** To include custom attributes in a Java SWT control, use the `org.swt.widgets.Widget.setData(String key, Object value)` method.

 **Note:** To include custom attributes in a Swing control, use the `putClientProperty("propertyName", "propertyValue")` method.

5. Click **OK**.

## Setting Classes to Ignore

To simplify the object hierarchy and to shorten the length of the lines of code in your test scripts and functions, you can suppress the controls for certain unnecessary classes in the following technologies:

- Win32.
- Java AWT/Swing.
- Java SWT/Eclipse.
- Windows Presentation Foundation (WPF).

1. Click **Silk4NET > Edit Options**. The **Script Options** dialog box opens.

2. Click the **Transparent Classes** tab.

3. In the **Transparent classes** grid, type the name of the class that you want to ignore during recording and playback.

Separate class names with a comma.

4. Click **OK**.

## Setting WPF Classes to Expose During Recording and Playback

Specify the names of any WPF classes that you want to expose during recording and playback. For example, if a custom class called *MyGrid* derives from the WPF `Grid` class, the objects of the *MyGrid* custom class are not available for recording and playback. `Grid` objects are not available for recording and playback because the `Grid` class is not relevant for functional testing since it exists only for layout purposes. As a result, `Grid` objects are not exposed by default. In order to use custom classes that are based on classes that are not relevant to functional testing, add the custom class, in this case *MyGrid*, to the **OPT\_WPF\_CUSTOM\_CLASSES** option. Then you can record, playback, find, verify properties, and perform any other supported actions for the specified classes.

1. Click **Silk4NET > Edit Options**. The **Script Options** dialog box opens.

2. Click the **WPF** tab.

3. In the **Custom WPF class names** grid, type the name of the class that you want to expose during recording and playback.

Separate class names with a comma.

4. Click **OK**.

## Setting Synchronization Options

Specify the synchronization and timeout values for Web applications.



**Note:** All the following settings are optional. Change these settings if they will improve the quality of your test methods.

1. Click **Silk4NET > Edit Options**. The **Script Options** dialog box opens.
2. Click the **Synchronization** tab.
3. To specify the synchronization algorithm for the ready state of a web application, from the **OPT\_XBROWSER\_SYNC\_MODE** list box, choose an option.

The synchronization algorithm configures the waiting period for the ready state of an invoke call. By default, this value is set to **AJAX**.

4. In the **Synchronization exclude list** text box, type the entire URL or a fragment of the URL for any service or Web page that you want to exclude.

Some AJAX frameworks or browser applications use special HTTP requests, which are permanently open in order to retrieve asynchronous data from the server. These requests may let the synchronization hang until the specified synchronization timeout expires. To prevent this situation, either use the HTML synchronization mode or specify the URL of the problematic request in the **Synchronization exclude list** setting.

For example, if your Web application uses a widget that displays the server time by polling data from the client, permanent traffic is sent to the server for this widget. To exclude this service from the synchronization, determine what the service URL is and enter it in the exclusion list.

For example, you might type:

- `http://example.com/syncsample/timeService`
- `timeService`
- `UICallbackServiceHandler`

Separate multiple entries with a comma.



**Note:** If your application uses only one service, and you want to disable that service for testing, you must use the HTML synchronization mode rather than adding the service URL to the exclusion list.



**Tip:** Micro Focus recommends adding a substring of an URL to the exclude list, instead of the entire URL. For example, add `/syncsample` to the exclude list instead of `http://example.com/syncsample/timeService`. Excluding the entire URL might not work because the browser might return only a relative URL to Silk4NET. For example, if the browser returns only `/syncsample/timeService` and you have added `http://example.com/syncsample/timeService` to the exclude list, Silk4NET does not exclude the returned URL.

5. To specify the maximum time, in milliseconds, to wait for an object to be ready, type a value in the **OPT\_SYNC\_TIMEOUT** text box.  
By default, this value is set to **300000**.
6. To specify the time, in milliseconds, to wait for an object to be resolved during replay, type a value in the **OPT\_WAIT\_RESOLVE\_OBJDEF** text box.  
By default, this value is set to **5000**.
7. To specify the time, in milliseconds, to wait before the agent attempts to resolve an object again, type a value in the **OPT\_WAIT\_RESOLVE\_OBJDEF\_RETRY** text box.  
By default, this value is set to **500**.
8. Click **OK**.

## Setting Replay Options

Specify whether you want to ensure that the object that you want to test is active and whether to override the default replay mode. The replay mode defines whether controls are replayed with the mouse and

keyboard or with the API. Use the default mode to deliver the most reliable results. When you select another mode, all controls use the selected mode.

1. Click **Silk4NET > Edit Options**. The **Script Options** dialog box opens.
2. Click the **Replay** tab. The **Replay Options** page displays.
3. If the application under test usually takes a long time to start, increase the time to wait for the application by increasing the value in the **OPT\_APPREADY\_TIMEOUT** text box.
4. From the **OPT\_REPLAY\_MODE** list box, select one of the following options:
  - **Default** – Use this mode for the most reliable results. By default, each control uses either the mouse and keyboard (low level) or API (high level) modes. With the default mode, each control uses the best method for the control type.
  - **High level** – Use this mode to replay each control using the API of the target technology. For example for Rumba controls, the Rumba RDE API is used to replay the controls.
  - **Low level** – Use this mode to replay each control using the mouse and keyboard.
5. To ensure that the object that you want to test is active, check the **OPT\_ENSURE\_ACTIVE\_OBJDEF** check box.
6. To change the time to wait for an object to become enabled during playback, type the new time into the field in the **Object enabled timeout** section.  
The time is specified in milliseconds. The default value is 1000.
7. To enable the **Playback Status** dialog box, check the **OPT\_SHOW\_PLAYBACK\_STATUS\_DIALOG** check box..  
You can use the **Playback Status** dialog box to see the actions that are performed during the replay of a test on a remote location, for example when executing a test against a mobile application on a remote device.
8. To display a video or screenshots of the application under test in the **Playback Status** dialog box, check the **OPT\_PLAYBACK\_STATUS\_DIALOG\_SCREENSHOTS** check box.
9. Click **OK**.

## Setting Advanced Options

Specify whether you want to enable Windows Accessibility, whether the focus should be removed from the window during text capture, and whether locator attribute names should be case sensitive.

1. Click **Silk4NET > Edit Options**. The **Script Options** dialog box opens.
2. Click the **Advanced** tab. The **Advanced Options** page displays.
3. Check the **OPT\_ENABLE\_ACCESSIBILITY** check box to enable Microsoft Accessibility in addition to the normal Win32 control recognition.
4. Check the **OPT\_REMOVE\_FOCUS\_ON\_CAPTURE\_TEXT** check box to remove the focus from the window before capturing a text.  
A text capture is performed during recording and replay by the following methods:
  - `TextClick`
  - `TextCapture`
  - `TextExists`
  - `TextRect`
5. Check the **OPT\_LOCATOR\_ATTRIBUTES\_CASE\_SENSITIVE** check box to set locator attribute names to be case sensitive. The names of locator attributes for mobile Web applications are always case insensitive, and this option is ignored when recording or replaying mobile Web applications.
6. Set the default accuracy level for new image assets by selecting a value from 1 (low accuracy) to 10 (high accuracy) from the **OPT\_IMAGE\_ASSET\_DEFAULT\_ACCURACY** list box.

7. Set the default accuracy level for new image verification assets by selecting a value from 1 (low accuracy) to 10 (high accuracy) from the **OPT\_IMAGE\_VERIFICATION\_DEFAULT\_ACCURACY** list box.
8. Click **OK**.

# Silk4NET Sample Tests

The Silk4NET sample tests are packaged in a Visual Studio solution which you can open and view as well as run against the Silk Test sample applications.

To open the sample projects, click **Open sample projects** in the *Silk4NET Start Page*, or click **FILE > Open Project** in Visual Studio and browse to `\Users\Public\Documents\SilkTest\samples\Silk4NET`. Select the folder that corresponds to the Visual Studio version that you are using and select the samples solution file. Then click **Open**.

In addition to the installed Silk4NET sample applications, the set of Silk4NET sample tests includes several tests for the following Silk Test Web-based sample applications:

<b>Insurance Co. Web site</b>	<a href="http://demo.borland.com/InsuranceWebExtJS/">http://demo.borland.com/InsuranceWebExtJS/</a>
<b>Green Mountain Outpost Web</b>	<a href="http://demo.borland.com/gmopost/">http://demo.borland.com/gmopost/</a>

# Object Recognition

Silk4NET enables you to easily identify the objects in your application under test.

Within Silk4NET, literal references to identified objects are referred to as *locators*. Silk4NET uses locators to find and identify objects in the application under test (AUT). Locators are a subset of the XPath query language, which is a common XML-based language defined by the World Wide Web Consortium, W3C.

## Locator Basic Concepts

Silk4NET supports a subset of the XPath query language. For additional information about XPath, see <http://www.w3.org/TR/xpath20/>.

XPath expressions rely on the current context, the position of the object in the hierarchy on which the `Find` method was invoked. All XPath expressions depend on this position, much like a file system. For example:

- `"//Shell"` finds all shells in any hierarchy starting from the current context.
- `"Shell"` finds all shells that are direct children of the current context.

Additionally, some XPath expressions are context sensitive. For example, `myWindow.find(xpath)` makes `myWindow` the current context.

Dynamic object recognition uses a `Find` or `FindAll` functions to identify an object in a test case. Silk Test Classic provides an alternative to using `Find` or `FindAll` functions in scripts that use XPath queries. You can use locator keywords in an INC file to create scripts that use dynamic object recognition and window declarations.

## Object Type and Search Scope

A locator typically contains the type of object to identify and a search scope. The search scope is one of the following:

- `//`
- `/`

Locators rely on the current object, which is the object for which the locator is specified. The current object is located in the object hierarchy of the application's UI. All locators depend on the position of the current object in this hierarchy, much like a file system.

XPath expressions rely on the *current context*, which is the position of the object in the hierarchy on which the `Find` method was invoked. All XPath expressions depend on this position, much like a file system.



### Note:

The object type in a locator for an HTML element is either the HTML tag name or the class name that Silk4NET uses for this object. For example, the locators `//a` and `//DomLink`, where `DomLink` is the name for hyperlinks in Silk4NET, are equivalent. For all non-HTML based technologies only the Silk4NET class name can be used.

### Example

- `//a` identifies hyperlink objects in any hierarchy relative to the current object.
- `/a` identifies hyperlink objects that are direct children of the current object.



**Note:** `<a>` is the HTML tag for hyperlinks on a Web page.

### Example

The following code sample identifies the first hyperlink in a browser. This example assumes that a variable with the name *browserWindow* exists in the script that refers to a running browser instance. Here the type is "a" and the current object is *browserWindow*.

VB

```
Dim link As DomLink = browserWindow.DomLink("//a")
```

C#

```
DomLink link = browserWindow.DomLink("//a");
```

## Using Attributes to Identify an Object

To identify an object based on its properties, you can use locator attributes. The locator attributes are specified in square brackets after the type of the object.

### Example

The following sample uses the `textContent` attribute to identify a hyperlink with the text *Home*. If there are multiple hyperlinks with the same text, the locator identifies the first one.

VB

```
Dim link as DomLink = browserWindow.DomLink("//a[@textContent='Home']")
```

C#

```
DomLink link = browserWindow.DomLink("//a[@textContent='Home']");
```

## Locator Syntax

Silk4NET supports a subset of the XPath query language to locate UI controls.

The following table lists the constructs that Silk4NET supports.

 **Note:** <a> is the HTML tag for hyperlinks on a Web page.

Supported Locator Construct	Sample	Description
//	//a	Identifies objects that are descendants of the current object.  The example identifies hyperlinks on a Web page.
/	/a	Identifies objects that are direct children of the current object. Objects located on lower hierarchy levels are not recognized.

Supported Locator Construct	Sample	Description
Attribute	<code>//a[@textContents='Home']</code>	<p>The example identifies hyperlinks on a Web page that are direct children of the current object.</p> <p>Identifies objects by a specific attribute.</p> <p>The example identifies hyperlinks with the text <i>Home</i>.</p>
Index	<p>Example 1: <code>//a[3]</code></p> <p>Example 2: <code>//a[@textContents='Home'][2]</code></p>	<p>Identifies a specific occurrence of an object if there are multiple ones. Indices are 1-based in locators.</p> <p>Example 1 identifies the third hyperlink and Example 2 identifies the second hyperlink with the text <i>Home</i>.</p>
Logical Operators: and, or, not, =, !=	<p>Example 1: <code>//a[@textContents='Remove' or @textContents='Delete']</code></p> <p>Example 2: <code>//a[@textContents!='Remove']</code></p> <p>Example 3: <code>//a[not(@textContents='Delete' or @id='lnkDelete') and @href='*/delete']</code></p>	<p>Identifies objects by using logical operators to combine attributes.</p> <p>Example 1 identifies hyperlinks that either have the caption <i>Remove</i> or <i>Delete</i>, Example 2 identifies hyperlinks with a text that is not <i>Remove</i>, and Example 3 shows how to combine different logical operators.</p>
..	<p>Example 1: <code>//a[@textContents='Edit']/.</code></p> <p>Example 2: <code>//a[@textContents='Edit']/../a[@textContents='Delete']</code></p>	<p>Identifies the parent of an object.</p> <p>Example 1 identifies the parent of the hyperlink with the text <i>Edit</i> and Example 2 identifies a hyperlink with the text <i>Delete</i> that has a sibling hyperlink with the text <i>Edit</i>.</p>
*	<p>Example 1: <code>*[@textContents='Home']</code></p> <p>Example 2: <code>/*/a</code></p>	<p>Identifies objects without considering their types, like hyperlink, text field, or button.</p> <p>Example 1 identifies objects with the given text content, regardless of their type, and Example 2 identifies hyperlinks that are second-level descendants of the current object.</p>

The following table lists the locator constructs that Silk4NET does not support.

Unsupported Locator Construct	Example
Comparing two attributes with each other.	<code>//a[@textContents = @id]</code>

Unsupported Locator Construct	Example
An attribute name on the right side is not supported. An attribute name must be on the left side.	<code>//a['abc' = @id]</code>
Combining multiple locators with <code>and</code> or <code>or</code> .	<code>//a[@id = 'abc'] or ..//Checkbox</code>
More than one set of attribute brackets.	<code>//a[@id = 'abc'] [@textContents = '123']</code>  (use <code>//a [@id = 'abc'] and @textContents = '123'</code> instead)
More than one set of index brackets.	<code>//a[1][2]</code>
Any construct that does not explicitly specify a class or the class wildcard, such as including a wildcard as part of a class name.	<code>//[@id = 'abc']</code> (use <code>//*[@id = 'abc']</code> instead)  <code>"//**//a[@id='abc']"</code>

## Using Locators

Within Silk4NET, literal references to identified objects are referred to as *locators*. For convenience, you can use shortened forms for the locator strings in scripts. Silk4NET automatically expands the syntax to use full locator strings when you playback a script. When you manually code a script, you can omit the following parts in the following order:

- The search scope, `//`.
- The object type name. Silk4NET defaults to the class name.
- The surrounding square brackets of the attributes, `[ ]`.

When you manually code a script, we recommend that you use the shortest form available.



**Note:** When you identify an object, the full locator string is captured by default.

The following locators are equivalent:

- The first example uses the full locator string.

VB

```
_desktop.DomLink("//BrowserApplication//BrowserWindow//a[@textContents='Home']").Select()
```

C#

```
_desktop.DomLink("//BrowserApplication//BrowserWindow//a[@textContents='Home']").Select();
```

To confirm the full locator string, use the **Locator Spy** dialog box.

- The second example works when the browser window already exists.

VB

```
browserWindow.DomLink("//a[@textContents='Home']").Select()
```

C#

```
browserWindow.DomLink("//a[@textContents='Home']").Select();
```

Alternatively, you can use the shortened form.

VB

```
browserWindow.DomLink("@textContents='Home']").Select()
```

C#

```
browserWindow.DomLink("@textContents='Home']").Select();
```

To find an object that has no real attributes for identification, use the index. For instance, to select the second hyperlink on a Web page, you can type:

VB

```
browserWindow.DomLink("[2]").Select()
```

C#

```
browserWindow.DomLink("[2]").Select();
```

Additionally, to find the first object of its kind, which might be useful if the object has no real attributes, you can type:

VB

```
browserWindow.DomLink().Select()
```

C#

```
browserWindow.DomLink().Select();
```

## Using the Find Method

Instead of using methods like `.DomLink`, you can use the `Find` method to identify a single object with a locator.



**Note:** The `Find` method can only use full locators, the shortened locator form is not supported.

Instead of typing:

VB

```
_desktop.DomLink("//a[@textContents='Home']").Select()
```

C#

```
_desktop.DomLink("//a[@textContents='Home']").Select();
```

you can type:

VB

```
_desktop.Find(Of DomLink)("//a[@textContents='Home']").Select()
```

C#

```
_desktop.Find<DomLink>("//a[@textContents='Home']").Select();
```

The `.DomLink` method also uses the `Find` method internally. Prefer using the `.DomLink` method, because it is more concise than the `Find` method.

## Using Locators to Check if an Object Exists

You can use the `Exists` method to determine if an object exists in the application under test.

The following code checks if a hyperlink with the text *Log out* exists on a Web page:

VB

```
If (browserWindow.Exists( "//a[@textContents='Log out']" )) Then  
    ' do something  
End If
```

C#

```
if (browserWindow.Exists( "//a[@textContents='Log out']" )){  
    // do something  
}
```

### Using the Find method

You can use the `Find` method and the `FindOptions` method to check if an object, which you want to use later, exists.

The following code searches for a window and closes the window if the window is found:

VB

```
Dim mainWindow As Window  
mainWindow = _desktop.Find("//Window[@caption='My Window']", New  
FindOptions(False))  
If (mainWindow IsNot Nothing) Then  
    mainWindow.CloseSynchron()  
End If
```

C#

```
Window mainWindow = _desktop.Find<Window>("//Window[@caption='My Window']",  
new FindOptions(false));  
if (mainWindow != null){  
    mainWindow.CloseSynchron();  
}
```

## Identifying Multiple Objects with One Locator

You can use the `FindAll` method to identify all objects that match a locator rather than only identifying the first object that matches the locator.

### Example

The following code example uses the `FindAll` method to retrieve all hyperlinks of a Web page:

VB

```
Dim links As IList(Of DomLink) = browserWindow.FindAll(Of  
DomLink)("//a")
```

C#

```
IList<DomLink> links = browserWindow.FindAll<DomLink>("//a");
```

## Locator Customization

This section describes how you can create stable locators that enable Silk4NET to reliably recognize the controls in your application under test (AUT).

Silk4NET relies on the identifiers that the AUT exposes for its UI controls and is very flexible and powerful in regards to identifying UI controls. Silk4NET can use any declared properties for any UI control class and can also create locators by using the hierarchy of UI controls. From the hierarchy, Silk4NET chooses the most appropriate items and properties to identify each UI control.

Silk4NET can exclude dynamic numbers of controls along the UI control hierarchy, which makes the object recognition in Silk4NET very robust against changes in the AUT. Intermediate grouping controls that

change the hierarchy of the UI control tree, like formatting elements in Web pages, can be excluded from the object recognition.

Some UI controls do not expose meaningful properties, based on which they can be identified uniquely. Applications which include such controls are described as applications with *bad testability*. Hierarchies, and especially dynamic hierarchies, provide a good means to create unique locators for such applications. Applications with *good testability* should always provide a simple mechanism to identify UI controls uniquely.

One of the simplest and most effective practices to make your AUT easier to test is to introduce stable identifiers for controls and to expose these stable identifiers through the existing interfaces of the application.

## Stable Identifiers

A *stable identifier* for a UI control is an identifier that does not change between invocations of the control and between different versions of the application, in which the UI control exists. A stable identifier needs to be unique in the context of its usage, meaning that no other control with the same identifier is accessible at the same time. This does not necessarily mean that you need to use GUID-style identifiers that are unique in a global context. Identifiers for controls should be readable and provide meaningful names. Naming conventions for these identifiers will make it much easier to associate the identifier to the actual control.

### Example: Is the caption a good identifier for a control?

Very often test tools are using the *caption* as the default identifier for UI controls. The caption is the text in the UI that is associated with the control. However, using the caption to identify a UI control has the following drawbacks:

- The caption is not stable. Captions can change frequently during the development process. For example, the UI of the AUT might be reviewed at the end of the development process. This prevents introducing UI testing early in the development process because the UI is not stable.
- The caption is not unique. For example, an application might include multiple buttons with the caption **OK**.
- Many controls are not exposing a caption, so you need to use another property for identification.
- Using captions for testing localized applications is cumbersome, as you need to maintain a caption for a control in each language and you also have to maintain a complex script logic where you dynamically can assign the appropriate caption for each language.

## Creating Stable Locators

One of the main advantages of Silk4NET is the flexible and powerful object-recognition mechanism. By using XPath notation to locate UI controls, Silk4NET can reliably identify UI controls that do not have any suitable attributes, as long as there are UI elements near the element of interest that have suitable attributes. The XPath locators in Silk4NET can use the entire UI control hierarchy or parts of it for identifying UI controls. Especially modern AJAX toolkits, which dynamically generate very complex Document Object Models (DOMs), do not provide suitable control attributes that can be used for locating UI controls.

In such a case, test tools that do not provide intelligent object-recognition mechanisms often need to use index-based recognition techniques to identify UI controls. For example, identify the n-th control with icon *Expand*. This often results in test scripts that are hard to maintain, as even minor changes in the application can break the test script.

A good strategy to create stable locators for UI controls that do not provide useful attributes is to look for an anchor element with a stable locator somewhere in the hierarchy. From that anchor element you can then work your way to the element for which you want to create the locator.

Silk4NET uses this strategy when creating locators, however there might be situations in which you have to manually create a stable locator for a control.

## Example: Locating Siblings of a Control

This topic describes how you can locate a control, which does not provide any meaningful attributes that can be used in locators, when a stable locator for a sibling of the control is available.

Assume that you have already identified the control **Item 0.0**, which has the following stable locator:

```
/BrowserApplication//BrowserWindow//DIV[@textContent='Item 0.0']
```

If you know that **Item 0.0** has a sibling of the type *a*, you can use the following code to build a stable locator for the sibling:

```
/BrowserApplication//BrowserWindow//DIV[@textContent='Item 0.0']/../a
```

You can also use the sibling approach to identify text fields. Text fields often do not provide any meaningful attributes that can be used in locators. By using the label of a text field, you could create a meaningful locator for the text field, because the label is the best identifier for the text field from the perspective of a tester. You can easily use the label as a part of the locator for a test field by using the sibling approach. For example, if the text field is a sibling of a label with the text **User Name**, you can use the following locator:

```
/BrowserApplication//BrowserWindow//DIV[@textContent='User Name']/../input[@type='text']
```

## Example: Locating the Expand Icon in a Dynamic GWT Tree

The Google Widget Toolkit (GWT) is a very popular and powerful toolkit, which is hard to test. The dynamic tree control is a very commonly used UI control in GWT. To expand the tree, we need to identify the **Expand** icon element.

You can find a sample dynamic GWT tree at <http://samples.gwtproject.org/samples/Showcase/Showcase.html#!CwTree>.

The default locator generated by Silk4NET is the following:

```
/BrowserApplication//BrowserWindow//DIV[@id='gwt-debug-cwTree-dynamicTree-root-child0']/DIV/DIV[1]//IMG[@border='0']
```

For the following reasons, this default locator is no reliable locator for identifying the **Expand** icon for the control **Item 0.0**:

- The locator is complex and built on multiple hierarchies. A small change in the DOM structure, which is dynamic with AJAX, can break the locator.
- The locator contains an index for some of the controls along the hierarchy. Index based locators are generally weak as they find controls by their occurrence, for example finding the sixth expand icon in a tree does not define the control well. An exception to that rule would be if the index is used to express different data sets that you want to identify, for example the sixth data row in a grid.

Often a good strategy for finding better locators is to search for siblings of elements that you need to locate. If you find siblings with better locators, XPath allows you to construct the locator by identifying those siblings. In this case, the tree item **Item 0.0** provides a better locator than the **Expand** icon. The locator of the tree item **Item 0.0** is a stable and simple locator as it uses the `@textContent` property of the control.

By default, Silk4NET uses the property `@id`, but in GWT the `@id` is often not a stable property, because it contains a value like `'gwt-uid- $\langle$ nnn $\rangle$ '`, where  $\langle$ nnn $\rangle$  changes frequently, even for the same element between different calls.

You can manually change the locator to use the `@textContent` property instead of the `@id`.

Original Locator:

```
/BrowserApplication//BrowserWindow//DIV[@id='gwt-uid-109']
```

Alternate Locator:

```
/BrowserApplication//BrowserWindow//DIV[@textContent='Item 0.0']
```

Or you can instruct Silk4NET to avoid using `@id='gwt-uid- $\langle$ nnn $\rangle$ '`. In this case Silk4NET will automatically record the stable locator. You can do this by adding the text pattern that is used in `@id` properties to the locator attribute value blacklist. In this case, add `gwt-uid*` to the blacklist.

When inspecting the hierarchy of elements, you can see that the control **Item 0.0** and the **Expand** icon control have a joint root node, which is a `DomTableRow` control.

To build a stable locator for the **Expand** icon, you first need to locate **Item 0.0** with the following locator:

```
/BrowserApplication//BrowserWindow//DIV[@textContent='Item 0.0']
```

Then you need to go up two levels in the element hierarchy to the `DomTableRow` element. You express this with XPath by adding `../../` to the locator. Finally you need to search from `DomTableRow` for the **Expand** icon. This is easy as the **Expand** icon is the only `IMG` control in the sub-tree. You express this with XPath by adding `//IMG` to the locator. The final stable locator for the **Expand** icon looks like the following:

```
/BrowserApplication//BrowserWindow//DIV[@textContent='Item 0.0']/../..///IMG
```

## Custom Attributes

Many UI technologies provide a mechanism that allows them to extend the set of predefined attributes of UI controls with custom attributes. These custom attributes can be used by the application developer to introduce stable identifiers that uniquely identify the control. Silk4NET can access custom attributes of UI controls and can also use these custom attributes to identify UI controls.

Using special automation for the identification of UI controls has several advantages compared to using the defined attributes like `caption`. Being able to establish stable identifiers in the application code and to expose these identifiers through either custom attributes or defined automation properties leads to understandable and maintainable test-automation scripts, allowing you to start with your test automation early in the development process.

You can configure the attributes used for identification by using the flexible locator strategy of Silk4NET.

## Custom Attributes for Apache Flex Applications

Apache Flex applications use the predefined property `automationName` to specify a stable identifier for the Apache Flex control as follows:

```
<?xml version="1.0" encoding="utf-8"?>
  <s:Group xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    xmlns:mx="library://ns.adobe.com/flex/mx" width="400" height="300">
    <fx:Script>
      ...
    </fx:Script>
    <s:Button x="247" y="81" label="Button" id="button1" enabled="true"
click="button1_clickHandler(event)"
      automationName="AID_buttonRepeat"/>
    <s:Label x="128" y="123" width="315" height="18" id="label1"
verticalAlign="middle"
      text="awaiting your click" textAlign="center"/>
  </s:Group>
```

Apache Flex application locators look like the following:

```
...//SparkApplication//SparkButton[@caption='AID_buttonRepeat']
```



**Attention:** For Apache Flex applications, the *automationName* is always mapped to the locator attribute `caption` in Silk4NET. If the *automationName* attribute is not specified, Silk4NET maps the property `ID` to the locator attribute `caption`.

## Java SWT Custom Attributes

You can add custom attributes to a test application to make a test more stable. For example, in Java SWT, the developer implementing the GUI can define an attribute (for example, `'silkTestAutomationId'`) for a widget that uniquely identifies the widget in the application. A tester using Silk4NET can then add that attribute to the list of custom attributes (in this case, `'silkTestAutomationId'`), and can identify controls by that unique ID. Using a custom attribute is more reliable than other attributes like `caption` or `index`, since a `caption` will change when you translate the application into another language, and the `index` will change whenever another widget is added before the one you have defined already.

If more than one object is assigned the same custom attribute value, all the objects with that value will return when you call the custom attribute. For example, if you assign the unique ID, `'loginName'` to two different text fields, both fields will return when you call the `'loginName'` attribute.

### Java SWT Example

If you create a button in the application that you want to test using the following code:

```
Button myButton = Button(parent, SWT.NONE);  
  
myButton.setData("SilkTestAutomationId", "myButtonId");
```

To add the attribute to your XPath query string in your test, you can use the following query:

```
Dim button =  
desktop.PushButton("@SilkTestAutomationId='myButton' ")
```

To enable a Java SWT application for testing custom attributes, the developers must include custom attributes in the application. Include the attributes using the `org.swt.widgets.Widget.setData(String key, Object value)` method.

## Custom Attributes for Web Applications

HTML defines a common attribute `ID` that can represent a stable identifier. By definition, the `ID` uniquely identifies an element within a document. Only one element with a specific `ID` can exist in a document.

However, in many cases, and especially with AJAX applications, the `ID` is used to dynamically identify the associated server handler for the HTML element, meaning that the `ID` changes with each creation of the Web document. In such a case the `ID` is not a stable identifier and is not suitable to identify UI controls in a Web application.

A better alternative for Web applications is to introduce a new custom HTML attribute that is exclusively used to expose UI control information to Silk4NET.

Custom HTML attributes are ignored by browsers and by that do not change the behavior of the AUT. They are accessible through the DOM of the browser. Silk4NET allows you to configure the attribute that you want to use as the default attribute for identification, even if the attribute is a custom attribute of the control class. To set the custom attribute as the default identification attribute for a specific technology domain, click **Silk4NET > Edit Options > Custom Attributes** and select the technology domain.

The application developer just needs to add the additional HTML attribute to the Web element.

Original HTML code:

```
<A HREF="http://abc.com/control=4543772788784322..." <IMG  
src="http://abc.com/xxx.gif" width=16 height=16> </A>
```

HTML code with the new custom HTML attribute *AUTOMATION\_ID*:

```
<A HREF="http://abc.com/control=4543772788784322..."  
AUTOMATION_ID = "AID_Login" <IMG src="http://abc.com/xxx.gif"  
width=16 height=16> </A>
```

When configuring the custom attributes, Silk4NET uses the custom attribute to construct a unique locator whenever possible. Web locators look like the following:

```
...//DomLink[@AUTOMATION_ID='AID_Login']
```

### Example: Changing ID

One example of a changing ID is the Google Widget Toolkit (GWT), where the ID often holds a dynamic value which changes with every creation of the Web document:

```
ID = 'gwt-uid-<nnn>'
```

In this case `<nnn>` changes frequently.

## Custom Attributes for Windows Forms Applications

Windows Forms applications use the predefined automation property `automationId` to specify a stable identifier for the Windows forms control.

Silk4NET automatically will use this property for identification in the locator. Windows Forms application locators look like the following:

```
/FormsWindow//PushButton[@automationId='btnBasicControls']
```

## Custom Attributes for WPF Applications

WPF applications use the predefined automation property `AutomationProperties.AutomationId` to specify a stable identifier for the WPF control as follows:

```
<Window x:Class="Test.MainWindow"  
xmlns="http://schemas.microsoft.com/winfx/2006/xaml/presentation"  
xmlns:x="http://schemas.microsoft.com/winfx/2006/xaml"  
Title="MainWindow" Height="350" Width="525">  
<Grid>  
  <Button AutomationProperties.AutomationId="AID_buttonA">The  
Button</Button>  
</Grid>  
</Window>
```

Silk4NET automatically uses this property for identification in the locator. WPF application locators look like the following:

```
/WPFWindow[@caption='MainWindow']//WPFButton[@automationId='AID_buttonA']
```

## Troubleshooting Performance Issues for XPath

When testing applications with a complex object structure, for example complex web applications, you may encounter performance issues, or issues related to the reliability of your scripts. This topic describes how you can improve the performance of your scripts by using different locators than the ones that Silk4NET has automatically generated during recording.



**Note:** In general, we do not recommend using complex locators. Using complex locators might lead to a loss of reliability for your tests. Small changes in the structure of the tested application can break such a complex locator. Nevertheless, when the performance of your scripts is not satisfying, using more specific locators might result in tests with better performance.

The following is a sample element tree for the application MyApplication:

```
Root
  Node id=1
    Leaf id=2
    Leaf id=3
    Leaf id=4
    Leaf id=5
  Node id=6
    Node id=7
      Leaf id=8
      Leaf id=9
    Node id=9
      Leaf id=10
```

You can use one or more of the following optimizations to improve the performance of your scripts:

- If you want to locate an element in a complex object structure, search for the element in a specific part of the object structure, not in the entire object structure. For example, to find the element with the identifier 4 in the sample tree, if you have a query like `Root.Find("//Leaf[@id='4']")`, replace it with a query like `Root.Find("/Node[@id='1']/Leaf[@id='4']")`. The first query searches the entire element tree of the application for leaves with the identifier 4. The first leaf found is then returned. The second query searches only the first level nodes, which are the node with the identifier 1 and the node with the identifier 6, for the node with the identifier 1, and then searches in the subtree of the node with the identifier 1 for all leaves with the identifier 4.
- When you want to locate multiple items in the same hierarchy, first locate the hierarchy, and then locate the items in a loop. If you have a query like `Root.FindAll("/Node[@id='1']/Leaf")`, replace it with a loop like the following:

```
Public Sub Main()
  Dim node As TestObject

  node = _desktop.Find("//Node[@id='1']")
  For i As Integer = 1 To 4 Step 1
    node.Find("/Leaf[@id='"+i+"']")
  Next
End Sub
```

## Locator Spy

Use the **Locator Spy** to identify the caption or the XPath locator string for GUI objects. You can copy the relevant XPath locator strings and attributes into methods in your scripts. Additionally, you can manually edit the attributes of the XPath locator strings in your test scripts and validate the changes in the **Locator Spy**. Using the **Locator Spy** ensures that the XPath query string is valid.

The object tree in the locator spy lists all the objects that are available in the current application or Web page. You can use the object tree to inspect the available objects and the object structure of the application or Web page.



**Note:** The locator attributes table of the **Locator Spy** displays all attributes that you can use in the locator. For Web applications, the table also includes any attributes that you have defined to be ignored during recording.

# Object Maps

An object map is a test asset that contains items that associate a logical name (an alias) with a control or a window, rather than the control or window's locator. Once a control is registered in an object map asset, all references to it in scripts are made by its alias, rather than by its actual locator name.

You can use object maps to store objects that you are using often in multiple scripts. Multiple tests can reference a single object map item definition, which enables you to update that object map definition once and have Silk4NET update it in all tests that reference the object map definition.

In your scripts, you can mix object map identifiers and locators. This feature enables you to keep your object maps relatively small and easier to manage. You can simply store the commonly used objects in your object maps, and use locators to reference objects that are rarely used.



**Tip:** To optimally use the functionality that object maps provide, create an individual project in Silk4NET for each application that you want to test.

## Example for object maps

The following construct shows a definition for a `BrowserWindow` where the locator is used:

```
_desktop.BrowserApplication("cnn_com").BrowserWindow("//  
BrowserWindow[1]")
```

The name of the object map asset is `cnn_com`. The locator that can be substituted by an alias in the object map is the following:

```
"//BrowserWindow[1]"
```

The object map entry for the `BrowserWindow` is `BrowserWindow`.

The resulting definition of the `BrowserWindow` in the script is the following:

```
_desktop.BrowserApplication("cnn_com").BrowserWindow("BrowserWin  
dow")
```

If the index in the locator changes, you can just change the alias in the object map, instead of having to change every appearance of the locator in your test script. Silk4NET will update all tests that reference the object map definition.

## Example for mixing object map identifiers and locators

The following sample code shows how you can mix object map identifiers and locators to specify a rarely used child object of an object stored in an object map:

```
// VB  
Window window = _desktop.Window("MyApplication") // object map  
id - the application window is used often  
MenuItem aboutMenuItem =  
_desktop.MenuItem("@caption='About'") // locator - the About  
dialog is only used once  
aboutMenuItem.Select()
```

```
// C#  
Window window = _desktop.Window("MyApplication"); // object map  
id - the application window is used often  
MenuItem aboutMenuItem =  
_desktop.MenuItem("@caption='About'"); // locator - the About
```

```
dialog is only used once-  
aboutMenuItem.Select();
```

## Advantages of Using Object Maps

Object maps have the following advantages:

- They simplify test maintenance by applying changes made to a locator for an object map item to all tests that include the corresponding object map item.
- They ease the handling of locators in a large scale functional testing environment.
- They can be managed independent of individual scripts.
- They substitute complex locator names with descriptive names, which can make scripts easier to read.
- They eliminate dependence on locators, which may change if the test application is modified.

## Turning Object Maps Off and On

You can configure Silk4NET to use the locator name or the alias from the object map during recording.

To use the alias from the object map during recording:

1. Click **Silk4NET > Edit Options**.
2. Click **Recording**.
3. Check the **Record object maps** setting.

By default, Silk4NET records the alias from the object map during recording. If you set the **Record object maps** setting unchecked, Silk4NET records the locator name during recording. You can turn the **Record object maps** setting off and on as you find necessary. However, when a test is recorded with locators, you must re-record it in order to use object map items.



**Note:** In addition to the XPath attributes, Silk4NET uses additional attributes of the element when merging object maps during locator recording. However, attributes that might lead to ambiguous usage of object map IDs in a recorded script are not used to map locators to existing object map entries.



**Note:** When you enable the **Record object maps** setting, object map item names display in place of locators throughout Silk4NET. For instance, if you view the **Application Configurations** category in the **Properties** pane, you will notice that the **Locator** box shows the object map item name rather than the locator name.

## Using Assets in Multiple Projects

In Silk4NET, image assets, image verifications, and object maps are referred to as *assets*. If you want to use assets outside of the scope of the project in which they are located, you need to add a direct project reference from the project in which you want to use the assets to the project in which the assets are located.

During replay, when an asset is used, Silk4NET firstly searches in the *current project* for the asset. The current project is the directory which contains the test code that is currently executed. If Silk4NET does not find the asset in the current project, Silk4NET additionally searches the projects to which the current project has a project reference. If the asset is still not found, Silk4NET throws an error.



**Note:** When the code of a project, which you have added as a dependency to another project, is not referenced in the code of the dependent project, Visual Studio will remove the project dependency when you build the dependent project. To use assets that are located in a project dependency, you

have to add a code reference from the dependent project to a member of the project in which the assets are located. By adding such a code reference, you ensure that Visual Studio will not remove the project dependency when you are building the dependent project. For example, you could add a class or a constant to the project dependency, and then call the class or constant in the code of the dependent project.

If assets with the same name exist in more than one project, and you do not want to use the asset that is included in the current project, you can define which specific asset you want to use in any method that uses the asset. To define which asset you want to use, add the assembly name as a prefix to the asset name when calling the method. The assembly name defaults to the project name.

#### Example: Adding a project reference

If the project *ProjectA* contains a test that calls the following code:

```
'VB code
window.ImageClick( "imageAsset" )
```

and the image asset *imageAsset* is located in project *ProjectB*, you need to add a direct project reference from *ProjectA* to *ProjectB*.

#### Example: Calling a specific asset

If *ProjectA* and *ProjectB* both contain an image asset with the name *anotherImageAsset*, and you explicitly want to click the image asset from *ProjectB*, use the following code:

```
'VB code
window.ImageClick( "ProjectB:anotherImageAsset" )
```

## Merging Object Maps During Action Recording

When you record actions with Silk4NET, Silk4NET checks if existing object map entries can be reused. Silk4NET checks this directly during recording, when a new locator is generated. Silk4NET checks if the object that is currently recorded in the application under test exactly matches an existing object map entry, and if yes, Silk4NET reuses the object map identifier from the object map.

This behavior has the following benefits:

- Silk4NET correctly reuses an object map identifier during recording, even if the locator in the object map has changed.
- A recorded script cannot contain wrong object map identifiers, and therefore will never fail to play back because of a wrong object map identifier.
- If you restructure your object map, for example by adding an additional level of hierarchy, the object map identifiers are still reused.

#### Example

Silk4NET records the following script when you click on the **Products** link in the Micro Focus website, <http://www.borland.com>.

```
With _desktop.BrowserApplication( "borland_com" )
  With .BrowserWindow( "BrowserWindow" )
    .DomLink( "Products" ).Click( MouseButton .Left, New Point
(47, 18))
  End With
End With
```

The recorded object map looks like this:

```
borland_com //BrowserApplication
  BrowserWindow //BrowserWindow
```

```
Products //
A[@textContents='Products']
```

You could now manually restructure the object map to include the header section of the Micro Focus website:

```
borland_com //BrowserApplication
  BrowserWindow //BrowserWindow
  header //
HEADER[@role='banner']
  Products //
A[@textContents='Products']
```

When you now record a click on the **Products** link the object map is reused correctly, and the following script is recorded:

```
With _desktop.BrowserApplication( "borland_com" )
  With .BrowserWindow( "BrowserWindow" )
    .DomElement("header").DomLink( "Products" ).Click( MouseButton.Left, New Point (47, 18))
  End With
End With
```



**Note:** When you record another object in the header section of the Micro Focus website, for example the **About** link, Silk4NET adds the **About** object map entry as a child of **BrowserWindow**, and not of **header**.

## Using Object Maps with Web Applications

By default, when you record actions against a Web application, Silk4NET creates an object map with the name *WebBrowser* for native browser controls and an object map asset for every Web domain.

For common browser controls which are not specific for a Web domain, like the main window or the dialog boxes for printing or settings, an additional object map is generated in the current project with the name *WebBrowser*.

In the object map, you can edit the URL pattern by which the object map entries are grouped. When you edit the pattern, Silk4NET performs a syntactical validation of the pattern. You can use the wildcards \* and ? in the pattern.

### Example

When you record some actions on <http://www.borland.com> and <http://www.microfocus.com> and then open the printer dialog, the following three new object map assets are added to the **Asset Browser**:

- WebBrowser
- borland\_com
- microfocus\_com



**Note:** Silk4NET generates the new object map assets only for projects without an object map. If you record actions against a Web application for which Silk4NET already includes an object map that was generated with a version of Silk4NET prior to version 14.0, the additionally recorded entries are stored into the existing object map, and there are no additional object map assets generated for the Web domains.

# Renaming an Object Map Item

You can manually rename items and locators in an object map.



**Warning:** Renaming an object map item affects every script that uses that item. For example, if you rename the **Cancel** button object map item from **CancelMe** to **Cancel**, every script that uses **CancelMe** must be changed manually to use **Cancel**.

Object map items must be unique. If you try to add a duplicate object map item, Silk4NET notifies you that the object must be unique.

If you use an invalid character or locator, the item name or locator text displays in red and a tooltip explains the error. Invalid characters for object map items include: \, /, <, >, ", :, \*, ?, |, =, ., @, [, ]. Invalid locator paths include: empty or incomplete locator paths.

1. In the **Solution Explorer**, click on the **Object Maps** folder of the project in which the object map that you want to change is located.
2. Choose one of the following:
  - Double-click the object map that includes the object map item that you want to rename.
  - Right-click the object map that includes the object map item that you want to rename and choose **Open**.

The object map displays a hierarchy of the object map items and the locator associated with each item.

3. Navigate to the object map item that you want to rename.  
For example, you might need to expand a node to locate the item that you want to rename.
4. Click the object that you want to rename and then click the object again.
5. Type the item name that you want to use and then press **Enter**.  
If you use an invalid character, the item name displays in red.  
The new name displays in the **Item name** list.
6. Press **CTRL+S** to save your changes



**Note:** All child nodes of any node in the object map tree are sorted alphabetically when you save the object map.

If any existing scripts use the item name that you changed, you must manually change the scripts to use the new item name.

# Modifying Object Maps

An existing object map is able to reuse existing object map identifiers during recording, even if you have added additional structural elements to the object map.

## Example: Adding a DIV to an existing object map

Let us suppose you want to add a DIV element to bundle the email and login fields in the following simple object map:

```
demo_borland_com //
BrowserApplication
  BrowserWindow //
  BrowserWindow
    login-form email //
INPUT[@id='login-form:email']
  login-form login //
INPUT[@id='login-form:login']
```

You can change the structure of the object map by adding the new DIV *loginArea* and the object map will still be able to correctly reuse the object map identifiers during recording.

```
demo_borland_com //
BrowserApplication
  BrowserWindow //
  BrowserWindow

loginArea // 'DIV[@id= '
login']
  login-form email //
INPUT[@id='login-form:email']
  login-form login //
INPUT[@id='login-form:login']
```

## Modifying a Locator in an Object Map

Locators are automatically associated with an object map item when you record a script. However, you might want to modify a locator path to make it more generic. For example, if your test application automatically assigns the date or time to a specific control, you might want to modify the locator for that control to use a wildcard. Using a wildcard enables you to use the same locator for each test even though each test inserts a different date or time.

1. In the **Solution Explorer**, click on the **Object Maps** folder of the project in which the object map that you want to change is located.
2. Choose one of the following:
  - Double-click the object map that includes the locator that you want to modify.
  - Right-click the object map that includes the locator that you want to modify and choose **Open**.

The object map displays a hierarchy of the object map items and the locator associated with each item.

3. Navigate to the locator that you want to modify.  
For example, you might need to expand a node to locate the locator that you want to modify.
4. Click the locator path that you want to modify and then click the locator path again.
5. If you have a valid locator path, you can type the item name and locator path that you want to use and then press **Enter**. To determine a valid locator path, use the **Locator Spy** dialog box as described in the following steps:
  - a) Click **Silk4NET > Locator Spy**.
  - b) Position the mouse over the object that you want to record and press **CTRL+ALT**. Silk4NET displays the locator string in the **Locator** text field.
  - c) Select the locator that you want to use in the **Locator Details** table.
  - d) Copy and paste the locator into the object map.
6. If necessary, modify the item name or locator text to meet your needs.

If you use an invalid character or locator, the item name or locator text displays in red and a tooltip explains the error.

Invalid characters for object map items include: \, /, <, >, ", :, \*, ?, |, =, ., @, [, ].

Invalid locator paths include: empty or incomplete locator paths.

7. Press **CTRL+S** to save your changes

If any existing scripts use the locator path that you modified, you must manually change the visual tests or scripts to use the new locator path.

# Updating Object Maps from the Test Application

If items in the test application change, you can use the **Object Map** UI to update the locators for these items.

1. In the **Solution Explorer**, click on the **Object Maps** folder of the project in which the object map that you want to change is located.
2. Choose one of the following:
  - Double-click the object map that you want to use.
  - Right-click the object map that you want to use and choose **Open**.

The object map displays a hierarchy of the object map items and the locator associated with each item.

3. Click **Update Locator**. The **Locator Spy** displays and Silk4NET opens the test application.
4. Position the mouse cursor over the object that you want to record and press **CTRL+ALT**. Silk4NET displays the locator string in the **Locator** text field.
5. Select the locator that you want to use in the **Locator Details** table.
6. Remove any attributes that you do not want to use from the locator that is displayed in the **Locator** text field.
7. Click **Validate Locator** to validate that the locator works.
8. Click **Paste Locator to Editor** to update the locator in the object map.
9. Save the changed object map.

When you update an object map item from the AUT, you can change only the XPath representations of leaf nodes in the object map tree. You cannot change the XPath representations of any parent nodes. When the XPath representations of higher-level nodes in the object map tree are not consistent after the update, an error message displays.

## Example

For example, suppose you have an object map item with an object map ID that has the following three hierarchy levels:

```
WebBrowser.Dialog.Cancel
```

The corresponding XPath representation of these hierarchy levels is the following:

```
/BrowserApplication//Dialog//PushButton[@caption='Cancel']
```

- First hierarchy level: /BrowserApplication
- Second hierarchy level: //Dialog
- Third hierarchy level: //PushButton[@caption='Cancel']

You can use the following locator to update the object map item:

```
/BrowserApplication//Dialog//PushButton[@id='123']
```

- First hierarchy level: /BrowserApplication
- Second hierarchy level: //Dialog
- Third hierarchy level: //PushButton[@id='123']

You cannot use the following locator to update the object map item, because the second level hierarchy nodes do not match:

```
/BrowserApplication//BrowserWindow//PushButton[@id='9999999']
```

- First hierarchy level: /BrowserApplication
- Second hierarchy level: //BrowserWindow

- Third hierarchy level: //PushButton[@id='9999999']

## Copying an Object Map Item

You can copy and paste object map entries within or between object maps. For example, if the same functionality exists in two separate test applications, you might copy a portion of one object map into another object map.

1. In the **Solution Explorer**, click on the **Object Maps** folder of the project in which the object map that you want to change is located.
2. Choose one of the following:
  - Double-click the object map that includes the object map item that you want to copy.
  - Right-click the object map that includes the object map item that you want to copy and choose **Open**.

The object map displays a hierarchy of the object map items and the locator associated with each item.

3. Navigate to the object map item that you want to copy.  
For example, you might need to expand a node to locate the item that you want to copy.
4. Choose one of the following:
  - Right-click the object map item that you want to copy and choose **Copy tree**.
  - Click the object map item that you want to copy and then press `Ctrl+C`.
5. In the object map hierarchy, navigate to the position where you want to paste the item that you copied.  
For instance, to include an item on the first level of the hierarchy, click the first item name in the item list. To position the copied item a level below a specific item, click the item that you want to position the copied item below.  
To copy and paste between object maps, you must exit the map where you copied the object map item and open and edit the object map where you want to paste the object map item.
6. Choose one of the following:
  - Right-click the position in the object map where you want to paste the copied object map item and choose **Paste**.
  - Click the position in the object map where you want to paste the copied object map item and then press `Ctrl+V`.

The object map item displays in its new position in the hierarchy.

7. Press **CTRL+S** to save your changes

If any existing scripts use the object map item name that you moved, you must manually change the scripts to use the new position in the hierarchy.

## Adding an Object Map Item

Object map items are automatically created when you record a script. Occasionally, you might want to manually add an object map item.

1. In the **Solution Explorer**, click on the **Object Maps** folder of the project in which the object map that you want to change is located.
2. Double-click the object map to which you want to add the new item. The object map displays a hierarchy of the object map items and the locator associated with each item.
3. In the object map hierarchy, right-click on the item below which you want to add the new object map item.

For instance, to include an item on the first level of the hierarchy, right-click on the first item name in the item list. To position the new item a level below a specific item, right-click on the item below which you want to position the new item.

4. Click **Insert new**. A new item is added to the hierarchy, as the first child of the current node.
5. If you have a valid locator path, you can type the item name and locator path that you want to use and then press **Enter**. To determine a valid locator path, use the **Locator Spy** dialog box as described in the following steps:
  - a) Click **Silk4NET > Locator Spy**.
  - b) Position the mouse over the object that you want to record and press **CTRL+ALT**. Silk4NET displays the locator string in the **Locator** text field.
  - c) Select the locator that you want to use in the **Locator Details** table.
  - d) Copy and paste the locator into the object map.
6. If necessary, modify the item name or locator text to meet your needs.

If you use an invalid character or locator, the item name or locator text displays in red and a tooltip explains the error.

Invalid characters for object map items include: \, /, <, >, ", :, \*, ?, |, =, ., @, [, ].

Invalid locator paths include: empty or incomplete locator paths.

7. Press **CTRL+S** to save your changes



**Note:** All child nodes of any node in the object map tree are sorted alphabetically when you save the object map.

## Opening an Object Map from a Script

When you are editing a script, you can open an object map by right clicking on an object map entry in the script and selecting **Open Silk4NET Asset**. This will open the object map in the GUI.

### Example

```
// VB .NET code
<TestMethod()> Public Sub TestMethod1()
    With _desktop.Window("Untitled -
Notepad").TextField("TextField").TypeKeys("hello")
    End With
End Sub
```

```
// C# code
[TestMethod]
public void TestMethod1()
{
    Window untitledNotepad = _desktop.Window("Untitled -
Notepad");
    untitledNotepad.TextField("TextField").TypeKeys("hello");
}
```

In the previous code sample, right-click `Untitled - Notepad` to open the entry `Untitled - Notepad` in the object map, or right-click `TextField` to open the entry `Untitled - Notepad.TextField` in the object map.

## Highlighting an Object Map Item in the Test Application

After you add or record an object map item, you can click **Highlight** to highlight the item in the test application. You might want to highlight an item to confirm that it's the item that you want to modify in the object map.

1. In the **Solution Explorer**, click on the **Object Maps** folder of the project in which the object map that you want to change is located.
2. Choose one of the following:
  - Double-click the object map that you want to use.
  - Right-click the object map that you want to use and choose **Open**.

The object map displays a hierarchy of the object map items and the locator associated with each item.

3. In the object map hierarchy, select the object map item that you want to highlight in the test application.



**Note:** Ensure that only one instance of the test application is running. Running multiple instances of the test application will cause an error because multiple objects will match the locator.

4. Click **Highlight**.

The **Select Application** dialog box might open if the test application has not been associated with the object map. If this happens, select the application that you want to test and then click **OK**.

Silk4NET opens the test application and displays a green box around the control that the object map item represents.

## Navigating from a Locator to an Object Map Entry in a Script

If you want to see more than the **ID** of an object map entry, you can easily see the raw locator that will be used by the Open Agent when the command is executed by doing the following:

1. Open a script.
2. Place your cursor within a string in a line of the script that you want to identify.
3. Right click and select **Open Silk4NET Asset**.



**Note:**

If the cursor is in a string that does not represent an object map entry, Silk4NET will still assume that it is an object map entry and you may not get the results that you expect.

The **Object Map** window opens with the proper item selected in the tree view.

## Finding Errors in an Object Map

If you use an invalid character or locator, the item name or locator text displays in red and a tooltip explains the error. Use the toolbar in the **Object Map** window to navigate to any errors.

1. In the **Solution Explorer**, click on the **Object Maps** folder of the project in which the object map that you want to change is located.
2. Choose one of the following:
  - Double-click the object map that you want to troubleshoot.
  - Right-click the object map that you want to troubleshoot and choose **Open**.

The object map displays a hierarchy of the object map items and the locator associated with each item.

3. Look for any item name or locator text displayed in red.
4. If necessary, modify the item name or locator text to meet your needs.

If you use an invalid character or locator, the item name or locator text displays in red and a tooltip explains the error.

Invalid characters for object map items include: \, /, <, >, ", :, \*, ?, |, =, ., @, [, ].

Invalid locator paths include: empty or incomplete locator paths.

5. Press **CTRL+S** to save your changes

## Deleting an Object Map Item

You might want to delete an item from an object map if it no longer exists in the test application or for some other reason.

1. In the **Solution Explorer**, click on the **Object Maps** folder of the project in which the object map that you want to change is located.
2. Double-click the object map that includes the object map item that you want to delete. The object map displays a hierarchy of the object map items and the locator associated with each item.
3. Navigate to the object map item that you want to delete.  
For example, you might need to expand a node to locate the object map item that you want to delete.
4. Choose one of the following:
  - Right-click the object map item that you want to delete and choose **Delete**, or choose **Delete tree** to additionally delete all child items of the object map item.
  - Click the object map item that you want to delete and then press **DEL**, or press **CTRL+DEL** to additionally delete all child items of the object map item.

After deleting an object map item, the focus moves to the next item in the object map.

5. Press **CTRL+S** to save your changes

If any existing scripts use the object map item or its children that you deleted, you must manually change any references to that object map item in the scripts.

## Initially Filling Object Maps

As a best practice, we recommend that you fill your object map and then review all object map items before you record your tests.

To initially fill your object map with all available items in the AUT, you might create a test that clicks every object and opens every window and dialog box in your test application. Then, you can review the object map item for each object and make any necessary modifications before you record your functional tests. After you have reviewed and modified the object map items you can delete the test that you have created to fill the object map.



**Tip:** You can use the arrow keys to navigate between items in an object map.

## Grouping Elements in Object Maps

When items in an object map have no consistent parent object, you can group these elements by adding a new tree item with the locator ".", which is the locator for the current element in Xpath.



**Warning:** Grouping object map items affects every script that uses these items. Every script that uses these items must be changed manually to use the new locators.

1. In the **Solution Explorer**, click on the **Object Maps** folder of the project in which the object map that you want to change is located.
2. Choose one of the following:
  - Double-click the object map that you want to edit.
  - Right-click the object map that you want to edit and choose **Open**.

The object map displays a hierarchy of the object map items and the locator associated with each item.

3. Right click on the tree item below which you want to add the new structuring item and choose **Insert New**.
4. Double click the **Item name** field of the new object map item.
5. Type the item name that you want to use and then press `Enter`.  
If you use an invalid character, the item name displays in red.  
The new name displays in the **Item name** list.
6. Click the **Locator path** field of the new object map item and type `.` into the field.
7. Press `Enter`.
8. For every object map item that you want to relocate to a new location under the new item:
  - a) Right click on the item that you want to relocate and choose **Cut tree**.
  - b) Right click on the new structuring item and choose **Paste**.
9. Press **CTRL+S** to save your changes

## Object Maps: Frequently Asked Questions

This section lists questions that you might encounter when using object maps with Silk4NET.

### Can I Merge Multiple Object Maps Into a Single Map?

Although Micro Focus recommends recording into the same object map instead of merging existing object maps, you can use a text editor to merge multiple object maps into a single map.

### What Happens to an Object Map when I Delete a Test Script?

When you delete a test script that includes object map entries, the associated object maps are not changed. All object map entries are persisted.

### Can I Manually Create an Object Map for My Application Under Test?

Micro Focus recommends creating object maps during the recording of a test. However, you can also create an empty object map and manually add object map entries to this map.

To create a new object map, select **Silk4NET > New Object Map** from the menu.

# Image Recognition Support

You can use image recognition in the following situations:

- To conveniently interact with test applications that contain highly customized controls, which cannot be identified using object recognition. You can use *image clicks* instead of coordinate-based clicks to click on a specified image.
- To test graphical objects in the application under test, for example charts.
- To perform a check of the visible UI of the application under test.

If you want to click on a control that is otherwise not recognizable, you can use the `ImageClick` method with an image asset. If you want to verify that an otherwise not recognizable control exists in your application under test, you can use the `VerifyAsset` method with an image verification.

Image recognition methods are supported for all technology domains that are supported by Silk4NET.

 **Note:** Image recognition methods do not work with controls that are not visible on the screen. For example, you cannot use image recognition for an image that is scrolled out of view.

## Image Click Recording

Image click recording is disabled by default in favor of coordinate-based click recording, because image click recording might generate a confusingly large number of images. To enable image click recording, you can perform one of the following:

- In the **Recording** dialog box, check **Record image clicks**.
- Click **Silk4NET > Edit Options**, select the **Recording** tab, and check the check box in the **Record image clicks** section.

 **Note:** When recording on a mobile browser, you do not have to enable image click recording.

When image click recording is enabled, Silk4NET records `ImageClick` methods when object recognition or text recognition is not possible. You can insert image clicks in your script for any control, even if the image clicks are not recorded.

If you do not wish to record an `ImageClick` action, you can turn off image click recording and record normal clicks or text clicks.

 **Note:** The recorded images are not reused. Silk4NET creates a new image asset for each image click that you record.

 **Note:** Image click recording is not supported for applications or applets that use the Java AWT/Swing controls.

## Image Recognition Methods

Silk4NET provides the following methods for image recognition:

Method	Description
<code>ImageClick</code>	Clicks in the middle of the image that is specified in an asset. Waits until the image is found or the <i>Object resolve timeout</i> , which you can define in the synchronization options, is over.

Method	Description
<code>ImageExists</code>	Returns whether the image that is specified in an asset exists.
<code>ImageRectangle</code>	Returns the object-relative rectangle of the image that is specified in an asset.
<code>ImageClickFile</code>	Clicks on the image that is specified in a file.
<code>ImageExistsFile</code>	Returns whether the image that is specified in a file exists.
<code>ImageRectangleFile</code>	Returns the object-relative rectangle of the image that is specified in a file.
<code>VerifyAsset</code>	Executes a verification asset. Throws a <code>VerificationFailedException</code> if the verification does not pass.
<code>TryVerifyAsset</code>	Executes a verification asset and returns whether the verification passed.

 **Note:** Image recognition methods do not work with controls that are not visible on the screen. For example, you cannot use image recognition for an image that is scrolled out of view.

## Image Assets

You can use image assets in the following situations:

- To conveniently interact with test applications that contain highly customized controls, which cannot be identified using object recognition. You can use *image clicks* instead of coordinate-based clicks to click on a specified image.
- To test graphical objects in the application under test, for example charts.

Image assets consist of an image with some additional information that is required by Silk4NET to work with the asset.

Silk4NET provides the following methods for image assets:

Method	Description
<code>ImageClick</code>	Clicks in the middle of the specified image asset. Waits until the image is found or the <i>Object resolve timeout</i> , which you can define in the synchronization options, is over.
<code>ImageExists</code>	Returns whether the specified image asset exists.
<code>ImageRectangle</code>	Returns the object-relative rectangle of the specified image asset.

Image assets must be located in the `Image Assets` folder of the project. The `.imageasset` files must be embedded resources.

## Creating an Image Asset

You can create image assets in one of the following ways:

- By inserting a new image asset into an existing script.
- During recording.
- From the menu.

To create a new image asset from the menu, perform the following steps:

1. In the menu, click **Silk4NET > New Image Asset**.
2. Type a useful name for the asset into the **Name** field and double-click **Silk4NET Image Asset**. The image asset UI opens.

3. Select how you want to add an image to the asset.
  - If you want to use an existing image, click **Browse** and select the image file.
  - If you want to capture a new image from the UI of the application under test, click **Capture**. If you are testing a Web application, you can select the browser on which you want to capture the image from the **Select Browser** window.
4. If you have selected to capture a new image, select the area of the screen that you want to capture and click **Capture Selection**.
5. *Optional:* Click **Verify** to check if Silk4NET can find the image asset in the UI of the AUT.  
If you are testing a Web application, you can select the browser on which you want to capture the image from the **Select Browser** window.
6. *Optional:* Check the **Click position** check box to select the location on which any clicks on the image asset are performed.  
The default location is the center of the image. Type the location into the **x** and **y** fields or select the location on the image.
7. *Optional:* You can set the option **Client Area Only** to define that only the part of the image that is actually part of the AUT is considered when Silk4NET compares the image verification to the UI of the AUT.
8. Specify the **Accuracy Level**.  
The accuracy level defines how much the image to be verified is allowed to be different to the image in the application under test, before Silk4NET declares the images as different. This is helpful if you are testing multiple systems or browsers with different screen resolutions. We recommend to choose a high level of accuracy in order to prevent false positives. You can change the default accuracy level in the options.  
 **Note:** When you set the **Accuracy Level** to less than five, the actual colors of the images are no longer considered for the comparison. Only the grayscale representations of the images are compared.
9. Save the image asset.

The new image asset is listed under the current project in the **Solution Explorer**, and you can use it to perform image clicks.

You can add multiple images to the same image asset.

 **Note:** To add an image click while recording against a mobile browser, you can right-click in the **Recording** window and select **ImageClick** from the action list.

## Adding Multiple Images to the Same Image Asset

During testing, you will often need to test functionality on multiple environments and with different testing configurations. In a different environment, the actual image might differ in such a degree from the image that you have captured in the image asset, that image clicks might fail, although the image is existing. In such a case, you can add multiple images to the same image asset.

To add an additional image to an image asset:

1. Double-click on the image asset to which you want to add an additional image. The image asset UI opens.
2. Click on the plus sign in the lower part of the UI to add a new image to the image asset.
3. Save the image asset.

The new image is added to the asset. Each time an image click is called, and until a match is achieved, Silk4NET will compare the images in the asset with the images in the UI of the application under test. By default, Silk4NET compares the images in the order in which they have been added to the asset.



**Note:** To change the order in which Silk4NET compares the images, click on an image in the lower part of the image asset UI and drag the image to the position that you want. The order lowers from left to right. The image that is compared first is the image in the left-most position.

## Opening an Asset from a Script

When you are editing a script, you can open an asset by right clicking it and selecting **Open Silk4NET Asset**. This will open the asset in the GUI.

If the asset is a reference to a file on the system, for example, referenced by `ImageClickFile`, the file will be opened by your system's default editor.

## Image Verifications

You can use an *Image Verification* to check if an image exists in the UI of the application under test (AUT) or not.

Image verifications consist of an image with some additional information that is required by Silk4NET to work with the asset.

To execute an image verification, use the `VerifyAsset` method.

Image verification assets must be located in the `Verifications` folder of the project.

The `.verification` files must be embedded resources.

An image verification fails when Silk4NET cannot find the image in the AUT. In this case the script breaks execution and throws a `VerificationFailedException`. To avoid this behavior, use the `TryVerifyAsset` method.

If the locator for the image verification is not found in the AUT, Silk4NET throws an `ObjectNotFoundException`.

You can open a successful image verification in TrueLog Explorer by clicking **Open Verification** in the **Info** tab of the verification step. You can open a failed image verification in TrueLog Explorer by clicking **Show Differences** in the **Info** tab of the verification step. If a failed image verification would have been successful if a lower accuracy level had been used, the accuracy level that would have succeeded is suggested.

## Creating an Image Verification

You can create image verifications in one of the following ways:

- By using the menu.
- During recording.

To create a new image verification in the menu, perform the following steps:

1. Click **Silk4NET > New Image Verification**.
2. Type a useful name for the asset into the **Name** field and double-click **Silk4NET Image Verification**. The image verification UI opens.
3. Click **Identify** to identify the image that you want to verify in the application under test.
4. *Optional:* If you want to recapture the same image from the application under test, because there is a change in comparison to the image that you had initially captured, click **Recapture**.  
If you are testing a Web application, you can select the browser on which you want to capture the image from the **Select Browser** window.
5. *Optional:* You can click **Verify** to test if the image verification works. Silk4NET searches for the image in the UI of the AUT, top-down and left to right, and highlights the first matching image.
6. *Optional:* You can add an exclusion area to the image verification, which will not be considered when Silk4NET compares the image verification to the UI of the application under test (AUT).

7. *Optional:* You can set the option **Client Area Only** to define that only the part of the image that is actually part of the AUT is considered when Silk4NET compares the image verification to the UI of the AUT.

8. Specify the **Accuracy Level**.

The accuracy level defines how much the image to be verified is allowed to be different to the image in the application under test, before Silk4NET declares the images as different. This is helpful if you are testing multiple systems or browsers with different screen resolutions. We recommend to choose a high level of accuracy in order to prevent false positives. You can change the default accuracy level in the options.



**Note:** When you set the **Accuracy Level** to less than five, the actual colors of the images are no longer considered for the comparison. Only the grayscale representations of the images are compared.

9. Save the image verification.

The new image verification is listed in the **Solution Explorer**, and you can use it to check if the image exists in the UI of your application under test.

## Adding an Image Verification During Recording

You can add image verifications to your scripts to check if controls which are otherwise not recognizable exist in the UI of the application under test. To add an image verification during the recording of a script, perform the following steps:

1. Begin recording.
2. Move the mouse cursor over the image that you want to verify and click **Ctrl + Alt**. Silk4NET asks you if you want to verify a property or an image.
3. Select **Create or Insert an Image Verification**.
4. Perform one of the following steps:
  - To create a new image verification in the image verification UI, select **New** from the list box.
  - To insert an existing image verification asset, select the image verification asset from the list box.
5. Click **OK**.
  - If you have chosen to create a new image verification, the image verification UI opens.
  - If you have chosen to use an existing image verification, the image verification is added to your script. You can skip the remaining steps in this topic.
6. To create a new image verification, click **Verify** in the image verification UI.
7. Move the mouse cursor over the image in the AUT and click **CTRL+ALT**. The image verification UI displays the new image verification.
8. Click **OK**. The new image verification is added to the current project.
9. Continue recording.

## Using Assets in Multiple Projects

In Silk4NET, image assets, image verifications, and object maps are referred to as *assets*. If you want to use assets outside of the scope of the project in which they are located, you need to add a direct project reference from the project in which you want to use the assets to the project in which the assets are located.

During replay, when an asset is used, Silk4NET firstly searches in the *current project* for the asset. The current project is the directory which contains the test code that is currently executed. If Silk4NET does not find the asset in the current project, Silk4NET additionally searches the projects to which the current project has a project reference. If the asset is still not found, Silk4NET throws an error.



**Note:** When the code of a project, which you have added as a dependency to another project, is not referenced in the code of the dependent project, Visual Studio will remove the project dependency when you build the dependent project. To use assets that are located in a project dependency, you have to add a code reference from the dependent project to a member of the project in which the assets are located. By adding such a code reference, you ensure that Visual Studio will not remove the project dependency when you are building the dependent project. For example, you could add a class or a constant to the project dependency, and then call the class or constant in the code of the dependent project.

If assets with the same name exist in more than one project, and you do not want to use the asset that is included in the current project, you can define which specific asset you want to use in any method that uses the asset. To define which asset you want to use, add the assembly name as a prefix to the asset name when calling the method. The assembly name defaults to the project name.

#### **Example: Adding a project reference**

If the project *ProjectA* contains a test that calls the following code:

```
'VB code  
window.ImageClick("imageAsset")
```

and the image asset *imageAsset* is located in project *ProjectB*, you need to add a direct project reference from *ProjectA* to *ProjectB*.

#### **Example: Calling a specific asset**

If *ProjectA* and *ProjectB* both contain an image asset with the name *anotherImageAsset*, and you explicitly want to click the image asset from *ProjectB*, use the following code:

```
'VB code  
window.ImageClick("ProjectB:anotherImageAsset")
```

# Enhancing Tests

This section describes how you can enhance a test.

## Recording Additional Actions Into an Existing Test

Once a test is created, you can open the test and record additional actions to any point in the test. This allows you to update an existing test with additional actions.

1. Open an existing test script.
2. Select the location in the test script into which you want to record additional actions.

 **Note:** Recorded actions are inserted after the selected location. The application under test (AUT) does not return to the base state. Instead, the AUT opens to the scope in which the preceding actions in the test script were recorded.

3. Click **Silk4NET > Record Actions**.

Silk4NET minimizes and the **Recording** window opens.

4. Record the additional actions that you want to perform against the AUT.

For information about the actions available during recording, see *Actions Available During Recording*.

5. To stop recording, click **Stop** in the **Recording** window.

## Calling Windows DLLs

This section describes how you can call DLLs. You can call a DLL either within the process of the Open Agent or in the application under test (AUT). This allows the reuse of existing native DLLs in test scripts.

DLL calls in the Open Agent are typically used to call global functions that do not interact with UI controls in the AUT.

DLL calls in the AUT are typically used to call functions that interact with UI controls of the application. This allows Silk4NET to automatically synchronize the DLL call during playback.

 **Note:** In 32-bit applications, you can call 32-bit DLLs, while in 64-bit applications you can call 64-bit DLLs. The Open Agent can execute both 32-bit and 64-bit DLLs.

 **Note:** The .NET framework also provides built-in support for DLL calling, which is called P/Invoke. P/Invoke can be used in Visual Basic scripts to call DLL functions within the process that executes the script. However, in contrast to calling DLL functions with Silk Test Workbench in the application under test, there is no automatic synchronization.

 **Note:** You can only call DLLs with a C interface. If you want to call .NET assemblies, which also have the file extension .dll, do not use the DLL calling feature but instead just add a reference to the assembly in your .NET script.

## Calling a Windows DLL from Within a Script

A declaration for a DLL starts with an interface that has a Dll attribute. The syntax of the declaration is the following:

```
<Dll("dllname.dll")> Public Interface DllInterfaceName  
    FunctionDeclaration
```

```
[FunctionDeclaration]...  
End Interface
```

```
// C# code  
[Dll("dllname.dll")]  
public interface DllInterfaceName {  
    FunctionDeclaration ...  
}
```

**dllname** The name of or the full path to the DLL file that contains the functions you want to call from your scripts. Environment variables in the DLL path are automatically resolved. You do not have to use double backslashes (\\) in the path, single backslashes (\) are sufficient.

**DllInterfaceName** The identifier that is used to interact with the DLL in a script.

**FunctionDeclaration** A function declaration of a DLL function you want to call.

## DLL Function Declaration Syntax

A function declaration for a DLL typically has the following form:

For functions that do not have a return value, the declaration has the following form:

**return-type** The data type of the return value.

**function-name** The name of the function.

**arg-list** A list of the arguments that are passed to the function.

The list is specified as follows:

**data-type** The data type of the argument.

**identifier** The name of the argument.

## DLL Calling Example

This example writes the text *hello world!* into a field by calling the `SendMessage` DLL function from `user32.dll`.

DLL Declaration:

```
// VB .NET code  
<Dll("user32.dll")> Public Interface IUserDll32Functions  
    Function SendMessageW( _  
        ByVal obj As TestObject, ByVal message As Integer, ByVal wParam As  
        Integer, ByVal lParam As String) As Integer  
End Interface
```

```
// C# code  
[Dll("user32.dll")]  
public interface IUserDll32Functions {  
    int SendMessageW(TestObject obj, int message, int wParam, string lParam);  
}
```

The following code shows how to call the declared DLL function in the AUT:

```
// VB .NET code  
Public Sub Main()  
    Dim user32Functions As IUserDll32Functions =  
    DllCall.CreateInProcessDllCall(Of IUserDll32Functions)()  
    Dim textField = _desktop.Window().TextField()  
    user32Functions.SendMessageW(textField, WindowsMessages.WM_SETTEXT, 0, "my
```

```
text")
End Sub
```

```
// C# code
public void main()
{
    IUserDll32Functions user32Functions =
DllCall.CreateInProcessDllCall<IUserDll32Functions>();
    TextField textField = _desktop.Window().TextField();
    user32Functions.SendMessageW(textField, (int) WindowsMessages.WM_SETTEXT,
0, "my text");
}
```



**Note:** You can only call DLL functions in the AUT if the first parameter of the DLL function has the C data type HWND.

The following code shows how to call the declared DLL functions in the process of the Open Agent:

```
// VB .NET code
Public Sub Main()
    Dim user32Functions As IUserDll32Functions = DllCall.CreateAgentDllCall(Of
IUserDll32Functions)()
    Dim textField = _desktop.Window().TextField()
    user32Functions.SendMessageW(textField, WindowsMessages.WM_SETTEXT, 0, "my
text")
End Sub
```

```
// C# code
public void main()
{
    IUserDll32Functions user32Functions =
DllCall.CreateAgentDllCall<IUserDll32Functions>();
    TextField textField = _desktop.Window().TextField();
    user32Functions.SendMessageW(textField, (int) WindowsMessages.WM_SETTEXT,
0, "my text");
}
```



**Note:** The example code uses the `WindowsMessages` class that contains useful constants for usage with DLL functions that relate to Windows messaging.

## Passing Arguments to DLL Functions

DLL functions are written in C, so the arguments that you pass to these functions must have the appropriate C data types. The following data types are supported:

Use this data type for arguments or return values with the following data types:

- int
- INT
- long
- LONG
- DWORD
- BOOL
- WPARAM
- HWND

The type works for all DLL arguments that have a 4-byte value.

Use this data type for arguments or return values with the C data types long and int64. The type works for all DLL arguments that have an 8-byte value.

Use this data type for arguments or return values with the C data types short and WORD. The type works for all DLL arguments that have a 2-byte value.

Use this data type for arguments or return values with the C data type bool.

**String** Use this for arguments or return values that are Strings in C.

Use this for arguments or return values with the C data type double.

Use this for arguments with the C data type RECT. cannot be used as a return value.

Use this for arguments with the C data type POINT. Point cannot be used as a return value.

Use this for arguments with the C data type HWND. TestObject cannot be used as a return value, however you can declare DLL functions that return a HWND with an Integer as the return type.

 **Note:** The passed TestObject must implement the interface so that Silk4NET is able to determine the window handle for the TestObject that should be passed into the DLL function. Otherwise an exception is thrown when calling the DLL function.

**List** Use this for arrays for user defined C structs. Lists cannot be used as a return value.

 **Note:** When you use a List as an parameter, the list that is passed in must be large enough to hold the returned contents.

 **Note:** A C struct can be represented by a List, where every list element corresponds to a struct member. The first struct member is represented by the first element in the list, the second struct members is represented by the second element in the list, and so on.

 **Note:** Any argument that you pass to a DLL function must have one of the preceding data types.

## Passing String Arguments to DLL Functions

Strings that are passing into a DLL function or that are returned by a DLL function are treated by default as Unicode Strings. If your DLL function requires ANSI String arguments, use the `CharacterSet` property of the `DllFunctionOptions` attribute.

### Example

```
<Dll( "user32.dll" )> Public Interface IUserDll32Functions
  <DllFunctionOptions(CharacterSet:=CharacterSet.Ansi)>
  Function SendMessageA( _
    ByVal obj As TestObject, ByVal message As Integer , ByVal
    wParam As Integer , ByRef lParam As String ) As Integer
End Interface
```

Passing a String back from a DLL call as a ByRef argument works per default if the String's size does not exceed 256 characters length. If the String that should be passed back is longer than 256 characters, you need to pass a Visual Basic String in that is long enough to hold the resulting String.

### Example

Use the following code to create a String with 1024 blank characters:

```
Dim longEmptyString = New String ( " "c , 1024 )
```

Pass this String as a ByRef argument into a DLL function and the DLL function will pass back Strings of up to 1024 characters of length.

When passing a String back from a DLL call as a function return value, the DLL should implement a DLL function called `FreeDllMemory` that accepts the C String pointer returned by the DLL function and that frees the previously allocated memory. If no such function exists the memory will be leaked.

## Aliasing a DLL Name

If a DLL function has the same name as a reserved word in Visual Basic, or the function does not have a name but an ordinal number, you need to rename the function within your declaration and use the alias statement to map the declared name to the actual name.

### Example

For example, the `Exit` statement is reserved by the Visual Basic compiler. Therefore, to call a function named `exit`, you need to declare it with another name, and add an alias statement, as shown here:

```
<Dll("mydll.dll")> Public Interface IMyDllFunctions
  <DllFunctionOptions(Alias:="exit")> Sub MyExit()
End Interface
```

## Conventions for Calling DLL Functions

The following calling conventions are supported when calling DLL functions:

- `__stdcall`
- `__cdecl`

The `__stdcall` calling convention is used by default when calling DLL functions. This calling convention is used by all Windows API DLL functions.

You can change the calling convention for a DLL function by using the `CallingConvention` property of the `DllFunctionOptions` attribute.

### Example

The following code example declares a DLL function with the `__cdecl` calling convention:

```
<Dll("msvcrt.dll")> Public Interface IMsVisualCRuntime
  <DllFunctionOptions(CallingConvention:=CallingConvention.Cdecl)>
  Function cos(ByVal input As Double) As Double
End Interface
```

## Custom Controls

Silk4NET provides the following features to support you when you are working with custom controls:

- The *dynamic invoke* functionality of Silk4NET enables you to directly call methods, retrieve properties, or set properties on an actual instance of a control in the application under test (AUT).
- The *class mapping* functionality enables you to map the name of a custom control class to the name of a standard Silk Test class. You can then use the functionality that is supported for the standard Silk Test class in your test.

Silk4NET supports managing custom controls over the UI for the following technology domains:

- Win32
- Windows Presentation Foundation (WPF)

- Windows Forms
- Java AWT/Swing
- Java SWT
- You can add code to the AUT to test custom controls.
- The **Manage Custom Controls** dialog box enables you to specify a name for a custom control that can be used in a locator and also enables you to write reusable code for the interaction with the custom control.



**Note:** For custom controls, you can only record methods like `Click`, `TextClick`, and `TypeKeys` with Silk4NET. You cannot record custom methods for custom controls except when you are testing Apache Flex applications.

## Dynamic Invoke

Dynamic invoke enables you to directly call methods, retrieve properties, or set properties, on an actual instance of a control in the application under test. You can also call methods and properties that are not available in the Silk4NET API for this control. Dynamic invoke is especially useful when you are working with custom controls, where the required functionality for interacting with the control is not exposed through the Silk4NET API.

Call dynamic methods on objects with the `Invoke` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Call multiple dynamic methods on objects with the `InvokeMethods` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Retrieve dynamic properties with the `GetProperty` method and set dynamic properties with the `SetProperty` method. To retrieve a list of supported dynamic properties for a control, use the `GetPropertyList` method.

For example, to call a method named `SetTitle`, which requires the title to be set as an input parameter of type string, on an actual instance of a control in the application under test, type the following:

```
control.Invoke("SetTitle", "my new title")
```



**Note:** Typically, most properties are read-only and cannot be set.



**Note:** Reflection is used in most technology domains to call methods and retrieve properties.



**Note:** You cannot dynamically invoke methods for DOM elements.

## Frequently Asked Questions About Dynamic Invoke

This section includes a collection of questions that you might encounter when you are dynamically invoking methods to test custom controls.

### Which Methods Can I Call With the Invoke Method?

To get a list of all the methods that you can call with the `Invoke` method for a specific test object, you can use the `GetDynamicMethodList`. To view the list, you can for example print it to the console or view it in the debugger.

### Why Does an Invoke Call Return a Simple String when the Expected Return is a Complex Object?

The `Invoke` method can only return simple data types. Complex types are returned as string. Silk4NET uses the `ToString` method to retrieve the string representation of the return value. To call the individual methods and read properties of the complex object that is returned by the first method invocation, use `InvokeMethods` instead of `Invoke`.

## How Can I Simplify My Scripts When I Use Many Calls To InvokeMethods?

When you extensively use `InvokeMethods` in your scripts, the scripts might become complex because you have to pass all method names as strings and all parameters as lists. To simplify such complex scripts, create a static method that interacts with the actual control in the AUT instead of interacting with the control through `InvokeMethods`. For additional information, see *Adding Code to the Application Under Test to Test Custom Controls*.

## Adding Code to the Application Under Test to Test Custom Controls

When you are testing Windows Forms applications or WPF applications, and you want to test complex custom controls or custom controls that you cannot test by simply using the `Invoke` and `InvokeMethods` methods, you can create a static method that interacts with the actual control in the application under test (AUT) and you can add this code to the AUT.

The benefit for you from adding code to the AUT is that the code in the AUT can use regular method calls for interacting with the control, instead of using the reflection-like style of calling methods with the dynamic invoke methods. Therefore you can use code completion and IntelliSense when you are writing your code. You can then call the code in the AUT with a simple invoke call, where you pass the control of interest as a parameter.

You can add code to the AUT in the following ways:

- Compile the code into the AUT. The implementation is simple, but you will be changing the AUT, which you might not want to do.
- Inject code to the AUT at runtime by using the `LoadAssembly` method in a test script. This requires more effort than compiling the code into the AUT, but the injected code will be located close to the test code. The `LoadAssembly` method is available for the classes `WPFWindow` and `FormsWindow`.

### Example: Testing the UltraGrid Infragistics control

This example demonstrates how you can retrieve the content of an `UltraGrid` control. The `UltraGrid` control is included in the `NETAdvantage for Windows Forms` library which is provided by Infragistics. You can download a trial of the library from <http://www.infragistics.com/products/windows-forms/downloads>.

To create the `UltraGridUtil` class, perform the following actions:

1. Create a new class library project in C# or VB .NET. Call the new project `AUTExtensions`.



**Note:** The class library should use the same .NET version as the AUT.

2. Add references to the required dependencies to the project. For example, for Infragistics version 12.2 you need to reference the following assemblies:

- `Infragistics4.Shared.v12.2`
- `Infragistics4.Win.UltraWinGrid.v12.2`
- `Infragistics4.Win.v12.2`

If you are not sure which version of Infragistics is used in your AUT you can use the **Process Explorer** tool from Microsoft to see which assemblies are loaded in your AUT.

- a. In the `AUTExtensions` project, create the new class `UltraGridUtil` with the following content:

```
' VB code
Public Class UltraGridUtil
```

```

Public Shared Function GetContents(ultraGrid As
Infragistics.Win.UltraWinGrid.UltraGrid) As List(Of List(Of
String))
    Dim contents = New List(Of List(Of String))
    For Each row In ultraGrid.Rows
        Dim rowContents = New List(Of String)
        For Each cell In row.Cells
            rowContents.Add(cell.Text)
        Next
        contents.Add(rowContents)
    Next
    Return contents
End Function

```

End Class

```

// C# code
using System.Collections.Generic;

namespace AUTExtensions {

    public class UltraGridUtil {

        public static List<List<string>>
GetContents(Infragistics.Win.UltraWinGrid.UltraGrid grid) {
            var result = new List<List<string>>();
            foreach (var row in grid.Rows) {
                var rowContent = new List<string>();
                foreach (var cell in row.Cells) {
                    rowContent.Add(cell.Text);
                }
                result.Add(rowContent);
            }
            return result;
        }
    }
}

```



**Note:** The Shared modifier makes the GetContents method a static method.

3. Build the AUTExtensions project.
4. Load the assembly into the AUT during playback.
  - Open an existing test script or create a new test script in a Silk4NET project.
  - Add the AUTExtensions project as a reference to the Silk4NET project.
  - Add the following code to your test script:

```

' VB code
mainWindow.LoadAssembly(GetType(UltraGridUtil).Assembly.Location)

```

```

// C# code
mainWindow.LoadAssembly(typeof(UltraGridUtil).Assembly.Location);

```

5. Call the static method of the injected code in order to get the contents of the UltraGrid:

```

'VB code
Dim ultraGrid = mainWindow.Control("@automationId='my grid'")
Dim contents As IList =

```

```
mainWindow.Invoke("AUTExtensions.UltraGridUtil.GetContents",
ultraGrid)

// C# code
Dim ultraGrid = mainWindow.Control("@automationId='my grid'");
Dim contents As IList =
mainWindow.Invoke("AUTExtensions.UltraGridUtil.GetContents",
ultraGrid);
```

## Frequently Asked Questions About Adding Code to the AUT

This section includes a collection of questions that you might encounter when you are adding code to the AUT to test custom controls.

### Why is Code That I Have Injected Into the AUT With the `LoadAssembly` Method Not Updated in the AUT?

If code in the AUT is not replaced by code that you have injected with the `LoadAssembly` method into the AUT, the assembly might already be loaded in your AUT. Assemblies cannot be unloaded, so you have to close and re-start your AUT.

### Why Do the Input Argument Types Not Match When I Invoke a Method?

If you invoke a method and you get an error that says that the input argument types do not match, the method that you want to invoke was found but the arguments are not correct. Make sure that you use the correct data types in your script.

If you use the `LoadAssembly` method in your script to load an assembly into the AUT, another reason for this error might be that your assembly is built against a different version of the third-party library than the version that is used by the AUT. To fix this problem, change the referenced assembly in your project. If you are not sure which version of the third-party library is used in your AUT, you can use the **Process Explorer** tool from Microsoft.

### How Do I Fix the Compile Error when an Assembly Can Not Be Copied?

When you have tried to add code to the AUT with the `LoadAssembly` method, you might get the following compile error:

```
Could not copy '<assembly_name>.dll' to '<assembly_name>.dll'. The process cannot access the file.
The reason for this compile error is that the assembly is already loaded in the AUT and cannot be
overwritten.
```

To fix this compile error, close the AUT and compile your script again.

## Testing Apache Flex Custom Controls

Silk4NET supports testing Apache Flex custom controls. However, by default, Silk4NET cannot record and playback the individual sub-controls of the custom control.

For testing custom controls, the following options exist:

- Basic support

With basic support, you use dynamic invoke to interact with the custom control during replay. Use this low-effort approach when you want to access properties and methods of the custom control in the test application that Silk4NET does not expose. The developer of the custom control can also add methods and properties to the custom control specifically for making the control easier to test. A user can then call those methods or properties using the dynamic invoke feature.

The advantages of basic support include:

- Dynamic invoke requires no code changes in the test application.
- Using dynamic invoke is sufficient for most testing needs.

The disadvantages of basic support include:

- No specific class name is included in the locator, for example Silk4NET records `//FlexBox` rather than `//FlexSpinner`.
- Only limited recording support.
- Silk4NET cannot replay events.

For more details about dynamic invoke, including an example, see *Dynamically Invoking Apache Flex Methods*.

- Advanced support

With advanced support, you create specific automation support for the custom control. This additional automation support provides recording support and more powerful play-back support. The advantages of advanced support include:

- High-level recording and playback support, including the recording and replaying of events.
- Silk4NET treats the custom control exactly the same as any other built-in Apache Flex control.
- Seamless integration into Silk4NET API
- Silk4NET uses the specific class name in the locator, for example Silk4NET records `//FlexSpinner`.

The disadvantages of advanced support include:

- Implementation effort is required. The test application must be modified and the Open Agent must be extended.

## Managing Custom Controls

You can create custom classes for custom controls for which Silk4NET does not offer any dedicated support. Creating custom classes offers the following advantages:

- Better locators for scripts.
- An easy way to write reusable code for the interaction with the custom control.

### Example: Testing the UltraGrid Infragistics control

Suppose that a custom grid control is recognized by Silk4NET as the generic class `Control`. Using the custom control support of Silk4NET has the following advantages:

**Better object recognition because the custom control class name can be used in a locator.**

Many objects might be recognized as `Control`. The locator requires an index to identify the specific object. For example, the object might be identified by the locator `//Control[13]`. When you create a custom class for this control, for example the class `UltraGrid`, you can use the locator `//UltraGrid`. By creating the custom class, you do not require the high index, which would be a fragile object identifier if the application under test changed.

**You can implement reusable playback actions for the**

When you are using custom classes, you can encapsulate the behavior for getting the contents of a grid into a method by adding the following code to your custom class, which is the class that

## control in scripts.

gets generated when you specify the custom control in the user interface.

Typically, you can implement the methods in a custom control class in one of the following ways:

- You can use methods like `Click`, `TypeKeys`, `TextClick`, and `TextCapture`.
- You can dynamically invoke methods on the object in the AUT.
- You can dynamically invoke methods that you have added to the AUT. This is the approach that is described in this example.

You can use the following code to call the static method that is defined in the example in *Adding Code to the Application Under Test to Test Custom Controls*. The method `GetContents` is added into the generated class `UltraGrid`.

```
' VB code
Partial Public Class UltraGrid

    Public Function GetContents() As IList
        Return
        Invoke("AUTExtensions.UltraGridUtil.
        GetContents", Me)
    End Function

End Class

// C# code
public partial class UltraGrid {

    public System.Collections.IList
    GetContents() {
        return
        (System.Collections.IList)
        Invoke("AUTExtensions.UltraGridUtil.
        GetContents", this);
    }
}
```

When you define a class as a custom control, you can use the class in the same way in which you can use any built-in class, for example the `Dialog` class.

```
' VB code
Dim ultraGrid As UltraGrid =
mainWindow.UltraGrid("@automationId=
'my grid')
Dim contents =
ultraGrid.GetContents()

// C# code
UltraGrid ultraGrid =
mainWindow.UltraGrid("@automationId=
'my grid');
```

```
IList contents =  
ultraGrid.GetContents();
```

## Supporting a Custom Control

Silk4NET supports managing custom controls over the UI for the following technology domains:

- Win32
- Windows Presentation Foundation (WPF)
- Windows Forms
- Java AWT/Swing
- Java SWT

To create a custom class for a custom control for which Silk4NET does not offer any dedicated support.

1. Click **Silk4NET > Manage Custom Controls**. The **Manage Custom Controls** dialog box opens.
2. In the **Silk4NET Custom Controls Output Directory** field, type in a name or click **Browse** to select the script that will contain the custom control.
3. Click on the tab of the technology domain for which you want to create a new custom class.
4. Click **Add**.
5. Click one of the following:
  - Click **Identify new custom control** to directly select a custom control in your application with the **Identify Object** dialog box.
  - Click **Add new custom control** to manually add a custom control to the list.

A new row is added to the list of custom controls.

6. If you have chosen to manually add a custom control to the list:
  - a) In the **Silk Test base class** column, select an existing base class from which your class will derive. This class should be the closest match to your type of custom control.
  - b) In the **Silk Test class** column, enter the name to use to refer to the class. This is what will be seen in locators. For example: `//UltraGrid` instead of `//Control[13]`.  
 **Note:** After you add a valid class, it will become available in the **Silk Test base class** list. You can then reuse it as a base class.
  - c) In the **Custom control class name** column, enter the fully qualified class name of the class that is being mapped. For example: `Infragistics.Win.UltraWinGrid.UltraGrid`. For Win32 applications, you can use the wildcards `?` and `*` in the class name.
7. *Only for Win32 applications:* In the **Use class declaration** column, set the value to **False** to simply map the name of a custom control class to the name of a standard Silk Test class. When you map the custom control class to the standard Silk Test class, you can use the functionality supported for the standard Silk Test class in your test. Set the value to **True** to additionally use the class declaration of the custom control class.
8. Click **OK**.
9. *Only for scripts:*
  - a) Add custom methods and properties to your class for the custom control.
  - b) Use the custom methods and properties of your new class in your script.



**Note:** The custom methods and properties are not recorded.



**Note:** Do not rename the custom class or the base class in the script file. Changing the generated classes in the script might result in unexpected behavior. Use the script only to add properties and methods to your custom classes. Use the **Manage Custom Controls** dialog box to make any other changes to the custom classes.

## Custom Controls Options

### Silk4NET > Manage Custom Controls.

Silk4NET supports managing custom controls over the UI for the following technology domains:

- Win32
- Windows Presentation Foundation (WPF)
- Windows Forms
- Java AWT/Swing
- Java SWT

In the **Silk4NET Custom Controls Output Directory**, define the script file into which the new custom classes should be generated.

When you map a custom control class to a standard Silk Test class, you can use the functionality supported for the standard Silk Test class in your test. The following **Custom Controls** options are available:

Option	Description
<b>Silk Test base class</b>	Select an existing base class to use that your class will derive from. This class should be the closest match to your type of custom control.
<b>Silk Test class</b>	Enter the name to use to refer to the class. This is what will be seen in locators.
<b>Custom control class name</b>	Enter the fully qualified class name of the class that is being mapped. You can use the wildcards ? and * in the class name.
<b>Use class declaration</b>	This option is available only for Win32 applications. By default <code>False</code> , which means the name of the custom control class is mapped to the name of the standard Silk Test class. Set this setting to <code>True</code> to additionally use the class declaration of the custom control class.



**Note:** After you add a valid class, it will become available in the **Silk Test base class** list. You can then reuse it as a base class.

#### Example: Setting the options for the UltraGrid Infragistics control

To support the UltraGrid Infragistics control, use the following values:

Option	Value
Silk Test base class	Control
Silk Test class	UltraGrid
Custom control class name	Infragistics.Win.UltraWinGrid.UltraGrid

## Improving Object Recognition with Microsoft Accessibility

You can use Microsoft Accessibility (Accessibility) to ease the recognition of objects at the class level. There are several objects in Internet Explorer and in Microsoft applications that Silk4NET can better recognize if you enable Accessibility. For example, without enabling Accessibility Silk4NET records only

basic information about the menu bar in Microsoft Word and the tabs that appear. However, with Accessibility enabled, Silk4NET fully recognizes those objects.

### Example

Without using Accessibility, Silk4NET cannot fully recognize a `DirectUIHwnd` control, because there is no public information about this control. Internet Explorer uses two `DirectUIHwnd` controls, one of which is a popup at the bottom of the browser window. This popup usually shows the following:

- The dialog box asking if you want to make Internet Explorer your default browser.
- The download options **Open**, **Save**, and **Cancel**.

When you start a project in Silk4NET and record locators against the `DirectUIHwnd` popup, with accessibility disabled, you will see only a single control. If you enable Accessibility you will get full recognition of the `DirectUIHwnd` control.

## Using Accessibility

Win32 uses the Accessibility support for controls that are recognized as generic controls. When Win32 locates a control, it tries to get the accessible object along with all accessible children of the control.

Objects returned by Accessibility are either of the class `AccessibleControl`, `Button` or `CheckBox`. `Button` and `Checkbox` are treated specifically because they support the normal set of methods and properties defined for those classes. For all generic objects returned by Accessibility the class is `AccessibleControl`.

### Example

If an application has the following control hierarchy before Accessibility is enabled:

- Control
  - Control
- Button

When Accessibility is enabled, the hierarchy changes to the following:

- Control
  - Control
    - Accessible Control
    - Accessible Control
      - Button
- Button

## Enabling Accessibility

If you are testing a Win32 application and cannot recognize objects, you should first enable Accessibility. Accessibility is designed to enhance object recognition at the class level.

To enable Accessibility:

1. Click **Silk4NET > Edit Options**. The **Script Options** dialog box opens.
2. Click **Advanced**.
3. Select the **Use Microsoft Accessibility** option. Accessibility is turned on.

# Overview of Silk4NET Support of Unicode Content

The Open Agent is Unicode-enabled, which means that the Open Agent is able to recognize double-byte (wide) languages.

With Silk4NET you can test applications that contain content in double-byte languages such as Chinese, Korean, or Japanese (Kanji) characters, or any combination of these.

The Open Agent supports the following:

- Localized versions of Windows.
- International keyboards and native language Input Method Editors (IME).
- Passing international strings as parameters to test cases, methods, and so on, and comparing strings.
- Reading and writing text files in multiple formats: ANSI, Unicode, and UTF-8.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

## Before testing double-byte characters with Silk4NET

Testing an internationalized application, particularly one that contains double-byte characters, is more complicated than testing an application that contains strictly English single-byte characters. Testing an internationalized application requires that you understand a variety of issues, from operating system support, to language packs, to fonts, to working with IMEs and complex languages.

Before you begin testing your application using Silk4NET, you must do the following:

- Meet the needs of your application under test (AUT) for any necessary localized OS, regional settings, and required language packs.
- Install the fonts necessary to display your AUT.
- If you are testing an application that requires an IME for data input, install the appropriate IME.

# Text Recognition Support

Text recognition methods enable you to conveniently interact with test applications that contain highly customized controls, which cannot be identified using object recognition. You can use *text clicks* instead of coordinate-based clicks to click on a specified text string within a control.

For example, you can simulate selecting the first cell in the second row of the following table:

CustomerName	FirstOrder	ID	IsActive	CreditCard
Bob Villa	01.01.2008	0	<input checked="" type="checkbox"/>	MasterCard
Brian Miller	02.01.2008	1	<input type="checkbox"/>	Visa
Caral Rudd	03.01.2008	2	<input checked="" type="checkbox"/>	American Ex...
Dan Rundgren	04.01.2008	3	<input type="checkbox"/>	MasterCard
Devie Yingstein	05.01.2008	4	<input checked="" type="checkbox"/>	Visa

Specifying the text of the cell results in the following code:

```
'VB code
table.TextClick("Brian Miller")

// C# code
table.TextClick("Brian Miller");
```

Text recognition methods are supported for the following technology domains:

- Win32.
- WPF.

- Windows Forms.
- Java SWT and Eclipse.
- Java AWT/Swing.



**Note:** For Java Applets, and for Swing applications with Java versions prior to version 1.6.10, text recognition is supported out-of-the-box. For Swing applications with Java version 1.6.10 or later, which do not support Direct3D, you have to add the following command-line element when starting the application:

```
-Dsun.java2d.d3d=false
```

For example:

```
javaw.exe -Dsun.java2d.d3d=false -jar mySwingApplication.jar
```

Text recognition is not supported for Java Applets and Swing applications that support Direct3D.

- Internet Explorer.



**Note:** Text recognition does not work with controls that are not visible on the screen. For example, you cannot use text recognition for a text that is scrolled out of view.



**Note:** Text recognition might not work if the font that is used in the target text is not installed on the machine on which the test is executed.

### Text recognition methods

The following methods enable you to interact with the text of a control:

**TextCapture** Returns the text that is within a control. Also returns text from child controls.

**TextClick** Clicks on a specified text within a control. Waits until the text is found or the *Object resolve timeout*, which you can define in the synchronization options, is over.

**TextRectangle** Returns the rectangle of a certain text within a control or a region of a control.

**TextExists** Determines whether a given text exists within a control or a region of a control.

### Text click recording

Text click recording is enabled by default. To disable text click recording, click **Silk4NET > Edit Options > Recording** and uncheck the **OPT\_RECORD\_TEXT\_CLICK** check box.

When text click recording is enabled, Silk4NET records `TextClick` methods instead of clicks with relative coordinates. Use this approach for controls where `TextClick` recording produces better results than normal coordinate-based clicks. You can insert text clicks in your script for any control, even if the text clicks are not recorded.

If you do not wish to record a `TextClick` action, you can turn off text click recording and record normal clicks.

The text recognition methods prefer whole word matches over partially matched words. Silk4NET recognizes occurrences of whole words previously than partially matched words, even if the partially matched words are displayed before the whole word matches on the screen. If there is no whole word found, the partly matched words will be used in the order in which they are displayed on the screen.

#### Example

The user interface displays the text *the hostname is the name of the host*. The following code clicks on *host* instead of *hostname*, although *hostname* is displayed before *host* on the screen:

```
'VB code
control.TextClick("host")

// C# code
control.TextClick("host");
```

The following code clicks on the substring *host* in the word *hostname* by specifying the second occurrence:

```
'VB code
control.TextClick("host", 2)

// C# code
control.TextClick("host", 2);
```

## Inserting a Result Comment in a Script

You can add result comments to a test script to provide supplemental information about the test. During the execution of the test, the result comments are added to the TrueLog file of the test.

You can add different comment types for information, warnings, and errors. The following code sample shows an example for each comment type:

```
'VB .NET code
Agent.LogInfo("This is a comment!")
Agent.LogWarning("This is a warning!")
Agent.LogError("This is an error!")

// C# code
Agent.LogInfo("This is a comment!");
Agent.LogWarning("This is a warning!");
Agent.LogError("This is an error!");
```

## Measuring Execution Time

You can use methods and properties provided by the `Timer` class to measure the time that your tests require to execute. For additional information, see *Timer Class*.

Among other usages, these methods and properties are used for the timing of test executions that are triggered from Silk Performer. For additional information on integrating Silk4NET with Silk Performer, refer to the [Silk Performer Help](#).

## Slowing Down Tests

Some applications under test might require extensive loading of application data in the UI, and might not be finished on time with loading objects that are required for replaying a test. To successfully replay tests on such an AUT, you can check for the existence of an object before performing an action on it, or you can add sleeps before performing an action.



**Note:** Micro Focus does not recommend generally adding sleeps to tests, because in most cases Silk4NET will automatically detect if an object is available, and sleeps might severely reduce the performance of tests.

1. To check if an object is available in the AUT, use the `Exists` method.

For example, to wait for six seconds for the button `INPUT` to become available, add the following line to your test script:

```
'VB .NET code
browserWindow.Exists("//INPUT", 6000)
```

```
// C# code
browserWindow.Exists("//INPUT", 6000)
```

2. To add a sleep before performing an action on a control, use the method.

For example, to sleep for six seconds, add the following line to your test script:

```
'VB .NET code
System.Threading.Thread.Sleep(6000)

// C# code
browserWindow.Exists("//INPUT", 6000)
```

## Testing Applications in Multiple UI Sessions on a Single Machine

To test applications in multiple UI sessions on a single machine or to test multiple agents on a single machine, connect to multiple Open Agent instances on the machine. Every agent runs in its own UI-session. A UI session can be a Remote Desktop Protocol (RDP) connection or a Citrix-based connection.

1. Create the UI sessions.
2. Open a command line window.
3. Navigate to the folder `/ng/MultiSessionLauncher` in the Silk Test installation directory.

For example, the default folder path might look like the following: `C:\Program Files (x86)\SilkTest\ng\MultiSessionLauncher`.

4. In each UI session, execute the following command:

```
MicroFocus.SilkTest.MultiSessionLauncher.exe <port>.
```

 **Note:** Use a unique port number, because this port will be used in your Silk4NET script to identify the Open Agent and the UI session in which the agent is running.

5. Change your Silk4NET scripts to connect to the Open Agent instances.

To connect to an Open Agent instance, add the following line to the script:

```
// VB .NET code
Private agent As RemoteAgent = Agent.Connect("hostname:port")

// C# code
private RemoteAgent agent = Agent.Connect("hostname:port");
```

Where *hostname* is the name of the machine on which the agent is running, and *port* is the unique port that you have used to execute the launcher.

The resulting objects are independent of each other and can be used either in one thread or in multiple threads.

 **Note:** If you want to launch an application in multiple UI sessions, you have to execute the base state for each UI session.

The following classes include overloaded methods for multi-agent or multi-session testing:

- Agent
- BaseState
- BrowserBaseState
- Clipboard
- ConsoleWindow
- Desktop
- DllCall

 **Note:** To use TrueLog when testing applications in multiple UI sessions on a remote machine, you need to manually copy any generated TrueLog files from the remote machine to your local machine.

## Example

Assume that the server machine that is hosting the UI sessions is named *ui-srv*. You can create three UI sessions by using the ports 22902, 22903, and 22904.

In the first session, open the command line window, navigate to the `MultiSessionLauncher` directory, and type the following:

```
MicroFocus.SilkTest.MultiSessionLauncher.exe 22902
```

Do the same for the other two sessions with the respective ports 22903 and 22904.

To connect to the Open Agent instances, add the following code to your script:

```
// VB .NET code
Private agent1 As RemoteAgent = Agent.Connect("ui-srv:22902")
Private agent2 As RemoteAgent = Agent.Connect("ui-srv:22903")
Private agent3 As RemoteAgent = Agent.Connect("ui-srv:22904")
```

```
// C# code
private RemoteAgent agent1 = Agent.Connect("ui-srv:22902");
private RemoteAgent agent2 = Agent.Connect("ui-srv:22903");
private RemoteAgent agent3 = Agent.Connect("ui-srv:22904");
```

The following sample script prints a simple text to each of the three UI sessions:

```
// VB .NET code
<SilkTestClass()> Public Class TestMultiSession

    Private agent1 As RemoteAgent = Agent.Connect("ui-srv:22902")
    Private agent2 As RemoteAgent = Agent.Connect("ui-srv:22903")
    Private agent3 As RemoteAgent = Agent.Connect("ui-srv:22904")

    <TestMethod()> Public Sub Test()
        Dim d1 As Desktop = agent1.Desktop
        Dim d2 As Desktop = agent2.Desktop
        Dim d3 As Desktop = agent3.Desktop

        Dim baseState = New BaseState()
        agent1.ExecuteBaseState(baseState)
        agent2.ExecuteBaseState(baseState)
        agent3.ExecuteBaseState(baseState)

        d1.Window("@caption='My Application']").TypeKeys("Hello to
session 1!")
        d2.Window("@caption='My Application']").TypeKeys("Hello to
session 2!")
        d3.Window("@caption='My Application']").TypeKeys("Hello to
session 3!")
    End Sub
End Class
```

```
// C# code
[SilkTestClass]
public class TestMultiSession {

    private RemoteAgent agent1 = Agent.Connect("ui-srv:22902");
    private RemoteAgent agent2 = Agent.Connect("ui-srv:22903");
    private RemoteAgent agent3 = Agent.Connect("ui-srv:22904");

    [TestMethod]
    public void Test() {
        Desktop d1 = agent1.Desktop;
        Desktop d2 = agent2.Desktop;
        Desktop d3 = agent3.Desktop;
```

```
BaseState basestate = new BaseState();
agent1.ExecuteBaseState(basestate);
agent2.ExecuteBaseState(basestate);
agent3.ExecuteBaseState(basestate);

    d1.Window("@caption='My Application'").TypeKeys("Hello to
session 1!");
    d2.Window("@caption='My Application'").TypeKeys("Hello to
session 2!");
    d3.Window("@caption='My Application'").TypeKeys("Hello to
session 3!");
    }
}
```

# Debugging Scripts

Run-time errors encountered during playback can be caused by a variety of factors, such as changes in the test application, script coding mistakes, or environmental changes. Quickly diagnosing and fixing these errors by debugging scripts minimizes script maintenance efforts and facilitates a more efficient team testing effort.

Script debugging lets you temporarily suspend script playback in the development environment to manage, examine, reset, step through, or continue script playback.

## Script Reliability

Application testing reveals errors in the application being tested. When testing software applications, these errors can cause scripts to not execute to completion.

The ability of scripts to reliably play back to completion is essential to successful testing. Synchronization issues, and expected and unexpected application errors may cause scripts to fail before playing back to completion. Silk4NET provides built-in option settings and scripting features that allow scripts to adjust to synchronization and application issues and play back reliably in any testing environment.

When playing back scripts, some errors are the result of slow application response time, which causes the application to lose synchronization with the scripts that test it. These errors can be handled by adjusting Silk4NET option settings that optimize synchronization between the scripts and the application being tested.

## Stepping Through a Script in Debug Mode

You can play back scripts to execute one line at a time while in debug mode. Known as *stepping*, this allows a tester to trace through code during playback to see the order in which statements execute, which aids in debugging.

Stepping enables you to walk through a script in debug mode to closely examine its execution.

In debug mode, control playback execution by using the following commands:

**Step Into (F11)** Executes the script one statement at a time. **Step Into** is useful to trace through each line in the code and steps into functions or embedded scripts. Each function or embedded script is also executed one code line at a time.

**Step Into** is useful for detailed analysis of a test, and lets you see the effect of each statement on variable usage and test application interaction.



**Note:** You cannot step into an *iterator* while debugging a VB .NET script. The iterator is executed but the debugger will not show that the iterator was entered during execution. You can set a breakpoint inside the iterator, and the execution will stop at the breakpoint, but any parameters or local variables of the iterator will not be shown in the **Locals** window. For additional information on iterators, see [Iterators](#).

**Step Over (F10)** Executes each procedure as if it were a single statement. Use this instead of Step Into to go directly into a function, without stepping through the individual lines that make up the function.

- Step Out (shift + F11)** Executes all remaining code in a procedure as if it were a single statement, and exits to the next statement in the procedure that caused the procedure to be initially called.
- Set Run Pointer/Next Statement** Continues execution with the statement at which the pointer is currently located, without executing any intermediate statements. Drag the pointer to the statement and click **F5** to execute it.

Stepping commands are accessed from the **DEBUG** menu.

## Stepping Through Script Playback from a Selected Point

During debugging, you can execute the script from where playback was suspended by a breakpoint.

1. Set a breakpoint at a specific line in the script.
2. Press **F5** to playback the script. Playback executes to the breakpoint, suspends and enters debug mode.
3. Press **F5** to playback the script to the next breakpoint.  
If the code executes successfully, playback re-enters debug mode and the next code to be played back is highlighted in yellow. If the code does not playback successfully, the **Playback Error** dialog box opens.
4. Press **F5** to step through playback of the remaining code in the script. Playback executes to the set breakpoint. The script displays in debug mode where you can step through the playback execution, control the step playback execution, or playback to/from certain points in the script.

## Controlling Line Execution During Script Debugging

While debugging a script, you can control flow to aid in error recognition and to reduce the time needed to diagnose and fix errors.

The **Step Over** command sets the execution point to the line in your script that you choose. This feature is only available while at a breakpoint during debugging.

Use the **Step Over** command when you want to re-run a statement within the current procedure or to skip over statements in your script you do not want to play back. While debugging a script, this feature lets you control flow to aid in error recognition and reduce the time needed to diagnose and fix errors.

1. While debugging or at a breakpoint during playback, perform one of the following steps:
  - Drag the yellow arrow to the code line to be played back next.
  - Click to position the cursor on the next line to be played back and then choose **DEBUG > Step Over**.
2. Press **F5** to resume playback at the selected line. After the selected line executes, playback suspends, and Silk4NET returns to debug mode. The execution point goes to the next sequential line.

## Stopping Script Playback at Selected Points

You can configure scripts to suspend at set points during playback and enter debug mode. The points at which you set a script to stop on playback are called *breakpoints*. Breakpoints let you manage playback to facilitate debugging, and can help isolate where a script fails. Breakpoints help to analyze how a script plays back even if there are no errors in the script. When you set a breakpoint, playback stops at the breakpoint and enters debug mode.

Setting breakpoints enables a script to play back to any specific point of interest. Place breakpoints at specific lines where you want to stop playback. Playback executes to the first breakpoint and suspends until you tell the script to proceed.

1. Open the script in which you want to set a breakpoint.
2. Click the line where playback is to be suspended.
3. Click **DEBUG > Toggle Breakpoint**. A breakpoint icon appears in the column next to the line. Playback executes to the set breakpoint. When playback suspends at a breakpoint, the script highlights the breakpoint line in yellow with a yellow arrow pointing to the line.

During debugging, you can control line execution during playback. You can also configure scripts to playback to or from a specific line.



**Tip:** Select a line with a breakpoint and press **F9** to delete the breakpoint from the selected line. Press **Ctrl+Shift+F9** to delete all breakpoints from a script.

## Printing a Script

You can print the code that displays in the **Code** window for easy review and troubleshooting.

1. Open the script that you want to print.
2. Choose **File > Print**. The **Print** dialog box opens.
3. Select the printer from the list or click **Find Printer** to search for an additional printer.
4. *Optional:* Check the **Print to file** check box to print to a file, such as a PDF.
5. *Optional:* Click **Preferences** to change the page setup settings, for example margins and orientation.
6. *Optional:* In the **Page Range** section, specify whether to print the entire document or only selected pages.

Click one of the following options.

- **All** – Prints the entire document.
  - **Selection** – Prints the selected code.
  - **Pages** – Prints the specified pages.
  - **Current Page** – Prints the current page.
7. *Optional:* In the **Number of copies** field, specify the number of copies to print.
  8. *Optional:* Check the **Collate** check box to print the corresponding page of every copy together. This check box is only enabled when you have selected to print more than one copy.
  9. Click **Print**.

# Testing Specific Environments

Silk4NET supports testing several types of environments.

## Apache Flex Support

Silk4NET provides built-in support for testing Apache Flex applications using Internet Explorer and the Standalone Flash Player, and Adobe AIR applications built with Apache Flex 4 or later.

Silk4NET also supports multiple application domains in Apache Flex 3.x and 4.x applications, which enables you to test sub-applications. Silk4NET recognizes each sub-application in the locator hierarchy tree as an application tree with the relevant application domain context. At the root level in the locator attribute table, Apache Flex 4.x sub-applications use the `SparkApplication` class. Apache Flex 3.x sub-applications use the `FlexApplication` class.

### Supported Controls

For a complete list of the record and playback controls available for Apache Flex testing, see the *Flex Class Reference*.

 **Note:** The Silk Test Flex Automation SDK is based on the Automation API for Apache Flex. The Silk Test Automation SDK supports the same components in the same manner that the Automation API for Apache Flex supports them. For instance, the `typekey` statement in the Flex Automation API does not support all keys. You can use the `input text` statement to resolve this issue. For more information about using the Flex Automation API, see the *Apache Flex Release Notes*.

## Configuring Flex Applications to Run in Adobe Flash Player

To run an Apache Flex application in Flash Player, one or both of the following must be true:

- The developer who creates the Flex application must compile the application as an EXE file. When a user launches the application, it will open in Flash Player. Install Windows Flash Player from <http://www.adobe.com/support/flashplayer/downloads.html>.
- The user must have Windows Flash Player Projector installed. When a user opens a Flex .SWF file, he can configure it to open in Flash Player. Windows Flash Projector is not installed when Flash Player is installed unless you install the Apache Flex developer suite. Install Windows Flash Projector from <http://www.adobe.com/support/flashplayer/downloads.html>.

1. For Microsoft Windows 7 and Microsoft Windows Server 2008 R2, configure Flash Player to run as administrator. Perform the following steps:

- a) Right-click the Adobe Flash Player program shortcut or the `FlashPlayer.exe` file, then click **Properties**.
- b) In the **Properties** dialog box, click the **Compatibility** tab.
- c) Check the **Run this program as an administrator** check box and then click **OK**.

2. Start the .SWF file in Flash Player from the command prompt (cmd.exe) by typing:

```
"<Application_Install_Directory>\ApplicationName.swf"
```

By default, the `<SilkTest_Install_Directory>` is located at `Program Files\Silk\Silk Test`.

# Launching the Component Explorer

Silk Test provides a sample Apache Flex application, the Component Explorer. Compiled with the Adobe Automation SDK and the Silk Test specific automation implementation, the Component Explorer is pre-configured for testing.

In Internet Explorer, open <http://demo.borland.com/flex/SilkTest17.5/index.html>. The application launches in your default browser.

# Testing Apache Flex Applications

Silk Test provides built-in support for testing Apache Flex applications. Silk Test also provides several sample Apache Flex applications. You can access the sample applications at <http://demo.borland.com/flex/SilkTest17.5/index.html>.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

Before you can test your own Apache Flex application, your Apache Flex developers must perform the following steps:

- Enabling your Apache Flex application for testing
- Creating testable Apache Flex applications
- Coding Apache Flex containers
- Implementing automation support for custom controls

To test your own Apache Flex application, follow these steps:

- Configuring security settings for your local Flash Player
- Recording a test
- Playing back a test
- Customizing Apache Flex scripts
- Testing a custom Apache Flex control



**Note:** Loading an Apache Flex application and initializing the Flex automation framework may take some time depending on the machine on which you are testing and the complexity of your Apache Flex application. Set the Window timeout value to a higher value to enable your application to fully load.

# Testing Apache Flex Custom Controls

Silk4NET supports testing Apache Flex custom controls. However, by default, Silk4NET cannot record and playback the individual sub-controls of the custom control.

For testing custom controls, the following options exist:

- Basic support

With basic support, you use dynamic invoke to interact with the custom control during replay. Use this low-effort approach when you want to access properties and methods of the custom control in the test application that Silk4NET does not expose. The developer of the custom control can also add methods and properties to the custom control specifically for making the control easier to test. A user can then call those methods or properties using the dynamic invoke feature.

The advantages of basic support include:

- Dynamic invoke requires no code changes in the test application.
- Using dynamic invoke is sufficient for most testing needs.

The disadvantages of basic support include:

- No specific class name is included in the locator, for example Silk4NET records `//FlexBox` rather than `//FlexSpinner`.
- Only limited recording support.
- Silk4NET cannot replay events.

For more details about dynamic invoke, including an example, see *Dynamically Invoking Apache Flex Methods*.

- Advanced support

With advanced support, you create specific automation support for the custom control. This additional automation support provides recording support and more powerful play-back support. The advantages of advanced support include:

- High-level recording and playback support, including the recording and replaying of events.
- Silk4NET treats the custom control exactly the same as any other built-in Apache Flex control.
- Seamless integration into Silk4NET API
- Silk4NET uses the specific class name in the locator, for example Silk4NET records `//FlexSpinner`.

The disadvantages of advanced support include:

- Implementation effort is required. The test application must be modified and the Open Agent must be extended.

## Dynamically Invoking Flex Methods

You can call methods, retrieve properties, and set properties on controls that Silk4NET does not expose by using the dynamic invoke feature. This feature is useful for working with custom controls and for working with controls that Silk4NET supports without customization.



**Note:** Typically, most properties are read-only and cannot be set.

### Supported Methods and Properties

The following methods and properties can be called:

- Methods and properties that Silk4NET supports for the control.
- All public methods that the Flex API defines
- If the control is a custom control that is derived from a standard control, all methods and properties from the standard control can be called.

### Supported Parameter Types

The following parameter types are supported:

- All built-in Silk4NET types

Silk4NET types includes primitive types (such as boolean, int, string), lists, and other types (such as Point)

### Returned Values

The following values are returned for properties and methods that have a return value:

- The correct value for all built-in Silk4NET types. These types are listed in the *Supported Parameter Types* section.
- All methods that have no return value return `null` in C# or `Nothing` in VB.

## Defining a Custom Control in the Test Application

Typically, the test application already contains custom controls, which were added during development of the application. If your test application already includes custom controls, you can proceed to *Testing a Flex Custom Control Using Dynamic Invoke* or to *Testing a Custom Control Using Automation Support*.

This procedure shows how a Flex application developer can create a spinner custom control in Flex. The spinner custom control that we create in this topic is used in several topics to illustrate the process of implementing and testing a custom control.

The spinner custom control includes two buttons and a textfield, as shown in the following graphic.



The user can click **Down** to decrement the value that is displayed in the textfield and click **Up** to increment the value in the textfield.

The custom control offers a public "Value" property that can be set and retrieved.

1. In the test application, define the layout of the control.

For example, for the spinner control type:

```
<?xml version="1.0" encoding="utf-8"?>
<customcontrols:SpinnerClass xmlns:mx="http://www.adobe.com/2006/mxml"
xmlns:controls="mx.controls.*" xmlns:customcontrols="customcontrols.*">
  <controls:Button id="downButton" label="Down" />
  <controls:TextInput id="text" enabled="false" />
  <controls:Button id="upButton" label="Up" />
</customcontrols:SpinnerClass>
```

2. Define the implementation of the custom control.

For example, for the spinner control type:

```
package customcontrols
{
    import flash.events.MouseEvent;

    import mx.containers.HBox;
    import mx.controls.Button;
    import mx.controls.TextInput;
    import mx.core.UIComponent;
    import mx.events.FlexEvent;

    [Event(name="increment", type="customcontrols.SpinnerEvent")]
    [Event(name="decrement", type="customcontrols.SpinnerEvent")]

    public class SpinnerClass extends HBox
    {
        public var downButton : Button;
        public var upButton : Button;
        public var text : TextInput;
        public var ssss: SpinnerAutomationDelegate;
        private var _lowerBound : int = 0;
        private var _upperBound : int = 5;

        private var _value : int = 0;
        private var _stepSize : int = 1;

        public function SpinnerClass() {
            addEventListener(FlexEvent.CREATION_COMPLETE,
creationCompleteHandler);
        }
    }
}
```

```

        private function creationCompleteHandler(event:FlexEvent) : void {
            downButton.addEventListener(MouseEvent.CLICK,
downButtonClickListener);
            upButton.addEventListener(MouseEvent.CLICK,
upButtonClickListener);
            updateText();
        }

        private function downButtonClickListener(event : MouseEvent) : void {
            if(Value - stepSize >= lowerBound) {
                Value = Value - stepSize;
            }
            else {
                Value = upperBound - stepSize + Value - lowerBound + 1;
            }

            var spinnerEvent : SpinnerEvent = new
SpinnerEvent(SpinnerEvent.DECREMENT);
            spinnerEvent.steps = _stepSize;
            dispatchEvent(spinnerEvent);
        }

        private function upButtonClickListener(event : MouseEvent) : void {
            if(cValue <= upperBound - stepSize) {
                Value = Value + stepSize;
            }
            else {
                Value = lowerBound + Value + stepSize - upperBound - 1;
            }

            var spinnerEvent : SpinnerEvent = new
SpinnerEvent(SpinnerEvent.INCREMENT);
            spinnerEvent.steps = _stepSize;
            dispatchEvent(spinnerEvent);
        }

        private function updateText() : void {
            if(text != null) {
                text.text = _value.toString();
            }
        }

        public function get Value() : int {
            return _value;
        }

        public function set Value(v : int) : void {
            _value = v;
            if(v < lowerBound) {
                _value = lowerBound;
            }
            else if(v > upperBound) {
                _value = upperBound;
            }
            updateText();
        }

        public function get stepSize() : int {
            return _stepSize;
        }

        public function set stepSize(v : int) : void {

```



1. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.
2. Call dynamic methods on objects with the `Invoke` method.
3. Call multiple dynamic methods on objects with the `InvokeMethods` method.
4. To retrieve a list of supported dynamic properties for a control, use the `GetPropertyList` method.
5. Retrieve dynamic properties with the `GetProperty` method and set dynamic properties with the `SetProperty` method.

### Example

The following example tests a spinner custom control that includes two buttons and a textfield, as shown in the following graphic.



The user can click **Down** to decrement the value that is displayed in the textfield and click **Up** to increment the value in the textfield.

The custom control offers a public "Value" property that can be set and retrieved.

To set the spinner's value to 4, type the following:

```
Dim spinner = Desktop.Find("//
FlexBox[@className=customcontrols.Spinner]")
spinner.SetProperty("Value", 4)
```

## Testing a Custom Control Using Automation Support

You can create specific automation support for the custom control. This additional automation support provides recording support and more powerful play-back support. To create automation support, the test application must be modified and the Open Agent must be extended.

Before you can test a custom control in Silk4NET, perform the following steps:

- Define the custom control in the test application
- Implement automation support

After the test application has been modified and includes automation support, perform the following steps:

For scripts, record the script and make manual modifications to fit the custom control.

For example, the following code shows how to increment the spinner's value by 3 by using the "Increment" method that has been implemented in the automation delegate:

```
_desktop.TestObject("//FlexSpinner[@caption='index:
1']").Invoke("Increment", 3)
```

The following example shows how to set the value of the spinner to 3.

```
_desktop.TestObject("//FlexSpinner[@caption='index:
1']").SetProperty("Value", 3)
```

### Implementing Automation Support for a Custom Control

Before you can test a custom control, implement automation support (the automation delegate) in ActionScript for the custom control and compile that into the test application.

The following procedure uses a custom Flex spinner control to demonstrate how to implement automation support for a custom control. The spinner custom control includes two buttons and a textfield, as shown in the following graphic.



The user can click **Down** to decrement the value that is displayed in the textfield and click **Up** to increment the value in the textfield.

The custom control offers a public "Value" property that can be set and retrieved.

1. Implement automation support (the automation delegate) in ActionScript for the custom control.

For further information about implementing an automation delegate, see the Adobe Live Documentation at [http://livedocs.adobe.com/flex/3/html/help.html?content=functest\\_components2\\_14.html](http://livedocs.adobe.com/flex/3/html/help.html?content=functest_components2_14.html).

In this example, the automation delegate adds support for the methods "increment", "decrement". The example code for the automation delegate looks like this:

```
package customcontrols
{
    import flash.display.DisplayObject;
    import mx.automation.Automation;
    import customcontrols.SpinnerEvent;
    import mx.automation.delegates.containers.BoxAutomationImpl;
    import flash.events.Event;
    import mx.automation.IAutomationObjectHelper;
    import mx.events.FlexEvent;
    import flash.events.IEventDispatcher;
    import mx.preloaders.DownloadProgressBar;
    import flash.events.MouseEvent;
    import mx.core.EventPriority;

    [Mixin]
    public class SpinnerAutomationDelegate extends BoxAutomationImpl
    {
        public static function init(root:DisplayObject) : void {
            // register delegate for the automation
            Automation.registerDelegateClass(Spinner,
SpinnerAutomationDelegate);
        }

        public function SpinnerAutomationDelegate(obj:Spinner) {
            super(obj);
            // listen to the events of interest (for recording)
            obj.addEventListener(SpinnerEvent.DECREMENT, decrementHandler);
            obj.addEventListener(SpinnerEvent.INCREMENT, incrementHandler);
        }

        protected function decrementHandler(event : SpinnerEvent) : void {
            recordAutomatableEvent(event);
        }

        protected function incrementHandler(event : SpinnerEvent) : void {
            recordAutomatableEvent(event);
        }

        protected function get spinner() : Spinner {
            return uiComponent as Spinner;
        }

        //-----
        //  override functions
        //-----

        override public function get automationValue():Array {
```

```

        return [ spinner.Value.toString() ];
    }

    private function replayClicks(button : IEventDispatcher, steps :
int) : Boolean {
        var helper : IAutomationObjectHelper =
Automation.automationObjectHelper;
        var result : Boolean;
        for(var i:int; i < steps; i++) {
            helper.replayClick(button);
        }
        return result;
    }

    override public function
replayAutomatableEvent(event:Event):Boolean {

        if(event is SpinnerEvent) {
            var spinnerEvent : SpinnerEvent = event as SpinnerEvent;
            if(event.type == SpinnerEvent.INCREMENT) {
                return replayClicks(spinner.upButton,
spinnerEvent.steps);
            }
            else if(event.type == SpinnerEvent.DECREMENT) {
                return replayClicks(spinner.downButton,
spinnerEvent.steps);
            }
            else {
                return false;
            }
        }
        else {
            return super.replayAutomatableEvent(event);
        }
    }

    // do not expose the child controls (i.e the buttons and the
textfield) as individual controls
    override public function get numAutomationChildren():int {
        return 0;
    }
}
}

```

2. To introduce the automation delegate to the Open Agent, create an XML file that describes the custom control.

The class definition file contains information about all instrumented Flex components. This file (or files) provides information about the components that can send events during recording and accept events for replay. The class definition file also includes the definitions for the supported properties.

The XML file for the spinner custom control looks like this:

```

<?xml version="1.0" encoding="UTF-8"?>
<TypeInfo>
    <ClassInfo Name="FlexSpinner" Extends="FlexBox">
        <Implementation
            Class="customcontrols.Spinner" />
        <Events>
            <Event Name="Decrement">
                <Implementation
                    Class="customcontrols.SpinnerEvent"
                    Type="decrement" />
            <Property Name="steps">

```

```

        <PropertyType Type="integer" />
    </Property>
</Event>
<Event Name="Increment">
    <Implementation
        Class="customcontrols.SpinnerEvent"
        Type="increment" />
    <Property Name="steps">
        <PropertyType Type="integer" />
    </Property>
</Event>
</Events>
<Properties>
    <Property Name="lowerBound" accessType="read">
        <PropertyType Type="integer" />
    </Property>
    <Property Name="upperBound" accessType="read">
        <PropertyType Type="integer" />
    </Property>
    <!-- expose read and write access for the Value property -->
    <Property Name="Value" accessType="both">
        <PropertyType Type="integer" />
    </Property>
    <Property Name="stepSize" accessType="read">
        <PropertyType Type="integer" />
    </Property>
</Properties>
</ClassInfo>
</TypeInfo>

```

3. Include the XML file for the custom control in the folder that includes all the XML files that describe all classes and their methods and properties for the supported Flex controls.

Silk Test contains several XML files that describe all classes and their methods and properties for the supported Flex controls. Those XML files are located in the `<<Silk Test_install_directory>\ng\agent\plugins\com.borland.fastxd.techdomain.flex.agent_<version>\config\automationEnvironment` folder.

If you provide your own XML file, you must copy your XML file into this folder. When the Open Agent starts and initializes support for Apache Flex, it reads the contents of this directory.

To test the Flex Spinner sample control, you must copy the CustomControls.xml file into this folder. If the Open Agent is currently running, restart it after you copy the file into the folder.

### Flex Class Definition File

The class definition file contains information about all instrumented Flex components. This file (or files) provides information about the components that can send events during recording and accept events for replay. The class definition file also includes the definitions for the supported properties.

Silk Test contains several XML files that describe all classes/events/properties for the common Flex common and specialized controls. Those XML files are located in the `<Silk Test_install_directory>\ng\agent\plugins\com.borland.fastxd.techdomain.flex.agent_<version>\config\automationEnvironment` folder.

If you provide your own XML file, you must copy your XML file into this folder. When the Silk Test agent starts and initializes support for Apache Flex, it reads the contents of this directory.

The XML file has the following basic structure:

```

<TypeInfo>
<ClassInfo>
<Implementation />

```

```
<Events>
<Event />
...
</Events>
<Properties>
<Property />
...
</Properties>
</ClassInfo>
</TypeInfo>
```

## Customizing Apache Flex Scripts

You can manually customize your Flex scripts. You can insert verifications manually using the `verify` function on Flex object properties. Each Flex object has a list of properties that you can verify. For a list of the properties available for verification, review the *Flex Class Reference*.

1. Record a test for your Flex application.
2. Open the script file that you want to customize.
3. Manually type the code that you want to add.

## Testing Multiple Flex Applications on the Same Web Page

When multiple Flex applications exist on the same Web page, Silk4NET uses the Flex application ID or the application size property to determine which application to test. If multiple applications exist on the same page, but they are different sizes, Silk4NET uses the size property to determine on which application to perform any actions and no additional steps are necessary.

Silk4NET uses JavaScript to find the Flex application ID to determine on which application to perform any actions if:

- Multiple Flex applications exist on a single Web page
- Those applications are the same size



**Note:** In this situation, if JavaScript is not enabled on the browser machine, an error occurs when a script runs.

1. Enable JavaScript.
2. In Internet Explorer, perform the following steps:
  - a) Choose **Tools > Internet Options**.
  - b) Click the **Security** tab.
  - c) Click **Custom level**.
  - d) In the **Scripting** section, under **Active Scripting**, click **Enable** and click **OK**.
3. Follow the steps in *Testing Apache Flex Applications*.



**Note:** If a frame exists on the Web page and the applications are the same size, this method will not work.

## Adobe AIR Support

Silk4NET supports testing with Adobe AIR for applications that are compiled with the Flex 4 compiler. For details about supported versions, check the *Release Notes* for the latest information.

Silk Test provides a sample Adobe AIR application. You can access the sample application at <http://demo.borland.com/flex/SilkTest17.5/index.html> and then click the Adobe AIR application that you want to use. You can select the application with or without automation. In order to execute the AIR application, you must install the Adobe AIR Runtime.

## Overview of the Flex Select Method Using Name or Index

You can record Flex *Select* methods using the *Name* or *Index* of the control that you select. By default, Silk4NET records *Select* methods using the name of the control. However, you can change your environment to record *Select* events using the index for the control, or you can switch between the name and index for recording.

You can record *Select* events using the index for the following controls:

- FlexList
- FlexTree
- FlexDataGrid
- FlexAdvancedDataGrid
- FlexOLAPDataGrid
- FlexComboBox

The default setting is *ItemBasedSelection* (*Select* event), which uses the name control. To use the index, you must adapt the *AutomationEnvironment* to use the *IndexBasedSelection* (*SelectIndex* event). To change the behavior for one of these classes, you must modify the *FlexCommonControls.xml*, *AdvancedDataGrid.xml*, or *OLAPDataGrid.xml* file using the following code. Those XML files are located in the `<Silk Test_install_directory>\ng\agent\plugins\com.borland.fastxd.techdomain.flex.agent_< version >\config\automationEnvironment` folder. Make the following adaptations in the corresponding xml file.

```
<ClassInfo Extends="FlexList" Name="FlexControlName"
EnableIndexBasedSelection="true" >
...
</ClassInfo>
```

With this adaption the *IndexBasedSelection* is used for recording `FlexList::SelectIndex` events. Setting the `EnableIndexBasedSelection=` to `false` in the code or removing the Boolean returns recording to using the name (`FlexList::Select` events).



**Note:** You must re-start your application, which automatically re-starts the Silk Test Agent, in order for these changes to become active.

## Selecting an Item in the FlexDataGrid Control

Select an item in the *FlexDataGrid* control using the index value or the content value.

1. To select an item in the *FlexDataGrid* control using the index value, use the `SelectIndex` method.

For example, type `FlexDataGrid.SelectIndex(1)`.

2. To select an item in the FlexDataGrid control using the content value, use the `Select` method.

Identify the row that you want to select with the required formatted string. Items must be separated by a pipe (" | "). At least one Item must be enclosed by two stars ("\*\*"). This identifies the item where the click will be performed.

The syntax is: `FlexDataGrid.Select("**Item1* | Item2 | Item3")`

## Enabling Your Flex Application for Testing

To enable your Flex application for testing, your Apache Flex developers must include the following components in the Flex application:

- Apache Flex Automation Package
- Silk Test Automation Package

### Apache Flex Automation Package

The Flex automation package provides developers with the ability to create Flex applications that use the Automation API. You can download the Flex automation package from Adobe's website, <http://www.adobe.com>. The package includes:

- Automation libraries – the `automation.swc` and `automation_agent.swc` libraries are the implementations of the delegates for the Flex framework components. The `automation_agent.swc` file and its associated resource bundle are the generic agent mechanism. An agent, such as the Silk Test Agent, builds on top of these libraries.
- Samples



**Note:** The Silk Test Flex Automation SDK is based on the Automation API for Flex. The Silk Test Automation SDK supports the same components in the same manner that the Automation API for Flex supports them. For instance, the `typekey` statement in the Flex Automation API does not support all keys. You can use the `input text` statement to resolve this issue. For more information about using the Flex Automation API, see the *Apache Flex Release Notes*.

### Silk Test Automation Package

Silk Test's Open Agent uses the Apache Flex automation agent libraries. The `FlexTechDomain.swc` file contains the Silk Test specific implementation.

You can enable your application for testing using either of the following methods:

- Linking automation packages to your Flex application
- Run-time loading

## Linking Automation Packages to Your Flex Application

You must precompile Flex applications that you plan to test. The functional testing classes are embedded in the application at compile time, and the application has no external dependencies for automated testing at run time.

When you embed functional testing classes in your application SWF file at compile time, the size of the SWF file increases. If the size of the SWF file is not important, use the same SWF file for functional testing and deployment. If the size of the SWF file is important, generate two SWF files, one with functional testing classes embedded and one without. Use the SWF file that does not include the embedded testing classes for deployment.

When you precompile the Flex application for testing, in the `include-libraries` compiler option, reference the following files:

- `automation.swc`

- automation\_agent.swc
- FlexTechDomain.swc
- automation\_charts.swc (include only if your application uses charts and Flex 2.0)
- automation\_dmv.swc (include if your application uses charts and Flex > 3.x)
- automation\_flasflexkit.swc (include if your application uses embedded flash content)
- automation\_spark.swc (include if your application uses the new Flex 4.x controls)
- automation\_air.swc (include if your application is an AIR application)
- automation\_airspace.swc (include if your application is an AIR application and uses new Flex 4.x controls)

When you create the final release version of your Flex application, you recompile the application without the references to these SWC files. For more information about using the automation SWC files, see the *Apache Flex Release Notes*.

If you do not deploy your application to a server, but instead request it by using the file protocol or run it from within Apache Flex Builder, you must include each SWF file in the local-trusted sandbox. This requires additional configuration information. Add the additional configuration information by modifying the compiler's configuration file or using a command-line option.



**Note:** The Silk Test Flex Automation SDK is based on the Automation API for Flex. The Silk Test Automation SDK supports the same components in the same manner that the Automation API for Flex supports them. For instance, when an application is compiled with automation code and successive SWF files are loaded, a memory leak occurs and the application runs out of memory eventually. The Flex Control Explorer sample application is affected by this issue. The workaround is to not compile the application SWF files that Explorer loads with automation libraries. For example, compile only the Explorer main application with automation libraries. Another alternative is to use the module loader instead of swfloader. For more information about using the Flex Automation API, see the *Apache Flex Release Notes*.

## Precompiling the Flex Application for Testing

You can enable your application for testing by precompiling your application for testing or by using run-time loading.

1. Include the automation.swc, automation\_agent.swc, and FlexTechDomain.swc libraries in the compiler's configuration file by adding the following code to the configuration file:

```
<include-libraries>
...
<library>/libs/automation.swc</library>
<library>/libs/automation_agent.swc</library>
<library>pathinfo/FlexTechDomain.swc</library>
</include-libraries>
```



**Note:** If your application uses charts, you must also add the automation\_charts.swc file.

2. Specify the location of the automation.swc, automation\_agent.swc, and FlexTechDomain.swc libraries using the include-libraries compiler option with the command-line compiler.

The configuration files are located at:

Apache Flex 2 SDK – <flex\_installation\_directory>/frameworks/flex-config.xml

Apache Flex Data Services – <flex\_installation\_directory>/flex/WEB-INF/flex/flex-config.xml

The following example adds the automation.swc and automation\_agent.swc files to the application:

```
mxmlc -include-libraries+=../frameworks/libs/automation.swc;../frameworks/
libs/
automation_agent.swc;pathinfo/FlexTechDomain.swc MyApp.mxml
```

 **Note:** Explicitly setting the include-libraries option on the command line overwrites, rather than appends, the existing libraries. If you add the automation.swc and automation\_agent.swc files using the include-libraries option on the command line, ensure that you use the += operator. This appends rather than overwrites the existing libraries that are included.

 **Note:** The Silk Test Flex Automation SDK is based on the Automation API for Flex. The Silk Test Automation SDK supports the same components in the same manner that the Automation API for Flex supports them. For instance, when an application is compiled with automation code and successive SWF files are loaded, a memory leak occurs and the application runs out of memory eventually. The Flex Control Explorer sample application is affected by this issue. The workaround is to not compile the application SWF files that Explorer loads with automation libraries. For example, compile only the Explorer main application with automation libraries. Another alternative is to use the module loader instead of swfloader. For more information about using the Flex Automation API, see the *Apache FlexRelease Notes*.

## Run-Time Loading

You can load Flex automation support at run time using the Silk Test Flex Automation Launcher. This application is compiled with the automation libraries and loads your application with the SWFLoader class. This automatically enables your application for testing without compiling automation libraries into your SWF file. The Silk Test Flex Automation Launcher is available in HTML and SWF file formats.

### Limitations

- The Flex Automation Launcher Application automatically becomes the root application. If your application must be the root application, you cannot load automation support with the Silk Test Flex Automation Launcher.
- Testing applications that load external libraries – Applications that load other SWF file libraries require a special setting for automated testing. A library that is loaded at run time (including run-time shared libraries (RSLs) must be loaded into the ApplicationDomain of the loading application. If the SWF file used in the application is loaded in a different application domain, automated testing record and playback will not function properly. The following example shows a library that is loaded into the same ApplicationDomain:

```
import flash.display.*;

import flash.net.URLRequest;

import flash.system.ApplicationDomain;

import flash.system.LoaderContext;

var ldr:Loader = new Loader();

var urlReq:URLRequest = new URLRequest("RuntimeClasses.swf");

var context:LoaderContext = new LoaderContext();

context.applicationDomain = ApplicationDomain.currentDomain;

loader.load(request, context);
```

## Loading at Run-Time

1. Copy the content of the `Silk\Silk Test\ng\AutomationSDK\Flex\<version>\FlexAutomationLauncher` directory into the directory of the Flex application that you are testing.
2. Open `FlexAutomationLauncher.html` in Windows Explorer and add the following parameter as a suffix to the file path:

```
?automationurl=YourApplication.swf
```

where *YourApplication.swf* is the name of the SWF file for your Flex application.

3. Add `file:///` as a prefix to the file path.

For example, if your file URL includes a parameter, such as: `?automationurl=explorer.swf`, type: .

```
file:///C:/Program%20Files/Silk/Silk Test/ng/sampleapplications/Flex/3.2/  
FlexControlExplorer32/FlexAutomationLauncher.html?automationurl=explorer.swf
```

## Using the Command Line to Add Configuration Information

To specify the location of the `automation.swc`, `automation_agent.swc`, and `FlexTechDomain.swc` libraries using the command-line compiler, use the `include-libraries` compiler option.

The following example adds the `automation.swc` and `automation_agent.swc` files to the application:

```
mxmlc -include-libraries+=../frameworks/libs/automation.swc;../frameworks/  
libs/  
automation_agent.swc;pathinfo/FlexTechDomain.swc MyApp.mxml
```



**Note:** If your application uses charts, you must also add the `automation_charts.swc` file to the `include-libraries` compiler option.

Explicitly setting the `include-libraries` option on the command line overwrites, rather than appends, the existing libraries. If you add the `automation.swc` and `automation_agent.swc` files using the `include-libraries` option on the command line, ensure that you use the `+=` operator. This appends rather than overwrites the existing libraries that are included.

To add automated testing support to a Flex Builder project, you must also add the `automation.swc` and `automation_agent.swc` files to the `include-libraries` compiler option.

## Passing Parameters into a Flex Application

You can pass parameters into a Flex application using the following procedures.

### Passing Parameters into a Flex Application Before Runtime

You can pass parameters into a Flex application before runtime using automation libraries.

1. Compile your application with the appropriate automation libraries.
2. Use the standard Flex mechanism for the parameter as you typically would.

### Passing Parameters into a Flex Application at Runtime Using the Flex Automation Launcher

Before you begin this task, prepare your application for run-time loading.

1. Open the `FlexAutomationLauncher.html` file or create a file using `FlexAutomationLauncher.html` as an example.
2. Navigate to the following section:

```
<script language="JavaScript" type="text/javascript">  
  
    AC_FL_RunContent(eef  
  
        "src", "FlexAutomationLauncher",
```

```

        "width", "100%",
        "height", "100%",
        "align", "middle",
        "id", "FlexAutomationLauncher",
        "quality", "high",
        "bgcolor", "white",
        "name", "FlexAutomationLauncher",
        "allowScriptAccess", "sameDomain",
        "type", "application/x-shockwave-flash",
        "pluginspage", "http://www.adobe.com/go/getflashplayer",
        "flashvars", "yourParameter=yourParameterValue"+
"&automationurl=YourApplication.swf"

    );
</script>

```

 **Note:** Do not change the "FlexAutomationLauncher" value for "src", "id", or "name."

3. Add your own parameter to "*yourParameter=yourParameterValue*".
4. Pass the name of the Flex application that you want to test as value for the "*&automationurl=YourApplication.swf*" value.
5. Save the file.

## Creating Testable Flex Applications

As a Flex developer, you can employ techniques to make Flex applications as "test friendly" as possible. These include:

- Providing Meaningful Identification of Objects
- Avoiding Duplication of Objects

### Providing Meaningful Identification of Objects

To create "test friendly" applications, ensure that objects are identifiable in scripts. You can set the value of the ID property for all controls that are tested, and ensure that you use a meaningful string for that ID property.

To provide meaningful identification of objects:

- Give all testable MXML components an ID to ensure that the test script has a unique identifier to use when referring to that Flex control.
- Make these identifiers as human-readable as possible to make it easier for the user to identify that object in the testing script. For example, set the id property of a Panel container inside a TabNavigator to `submit_panel` rather than `panel1` or `p1`.

When working with Silk4NET, an object is automatically given a name depending on certain tags, for instance, `id`, `childIndex`. If there is no value for the `id` property, Silk4NET uses other properties, such as the `childIndex` property. Assigning a value to the `id` property makes the testing scripts easier to read.

### Avoiding Duplication of Objects

Automation agents rely on the fact that some properties of object instances will not be changed during run time. If you change the Flex component property that is used by Silk4NET as the object name at run time, unexpected results can occur. For example, if you create a Button control without an `automationName` property, and you do not initially set the value of its `label` property, and then later set the value of the `label` property, problems might occur. In this case, Silk4NET uses the value of the `label` property of Button controls to identify an object if the `automationName` property is not set. If you later set the value of the `label` property, or change the value of an existing label, Silk4NET identifies the object as a new object and does not reference the existing object.

To avoid duplicating objects:

- Understand what properties are used to identify objects in the agent and avoid changing those properties at run time.
- Set unique, human-readable `id` or `automationName` properties for all objects that are included in the recorded script.

### Custom Attributes for Apache Flex Applications

Apache Flex applications use the predefined property `automationName` to specify a stable identifier for the Apache Flex control as follows:

```
<?xml version="1.0" encoding="utf-8"?>
  <s:Group xmlns:fx="http://ns.adobe.com/mxml/2009"
    xmlns:s="library://ns.adobe.com/flex/spark"
    xmlns:mx="library://ns.adobe.com/flex/mx" width="400" height="300">
    <fx:Script>
      ...
    </fx:Script>
    <s:Button x="247" y="81" label="Button" id="button1" enabled="true"
click="button1_clickHandler(event)"
      automationName="AID_buttonRepeat"/>
    <s:Label x="128" y="123" width="315" height="18" id="label1"
verticalAlign="middle"
      text="awaiting your click" textAlign="center"/>
  </s:Group>
```

Apache Flex application locators look like the following:

```
...//SparkApplication//SparkButton[@caption='AID_buttonRepeat']
```



**Attention:** For Apache Flex applications, the `automationName` is always mapped to the locator attribute `caption` in Silk4NET. If the `automationName` attribute is not specified, Silk4NET maps the property `ID` to the locator attribute `caption`.

### Flex AutomationName and AutomationIndex Properties

The Flex Automation API introduces the `automationName` and `automationIndex` properties. If you provide the `automationName`, Silk4NET uses this value for the recorded window declaration's name. Providing a meaningful name makes it easier for Silk4NET to identify that object. As a best practice, set the value of the `automationName` property for all objects that are part of the application's test.

Use the `automationIndex` property to assign a unique index value to an object. For instance, if two objects share the same name, assign an index value to distinguish between the two objects.



**Note:** The Silk Test Flex Automation SDK is based on the Automation API for Flex. The Silk Test Automation SDK supports the same components in the same manner that the Automation API for

Flex supports them. For instance, when an application is compiled with automation code and successive SWF files are loaded, a memory leak occurs and the application runs out of memory eventually. The Flex Control Explorer sample application is affected by this issue. The workaround is to not compile the application SWF files that Explorer loads with automation libraries. For example, compile only the Explorer main application with automation libraries. Another alternative is to use the module loader instead of swfloader. For more information about using the Flex Automation API, see the *Apache Flex Release Notes*.

## Flex Class Definition File

The class definition file contains information about all instrumented Flex components. This file (or files) provides information about the components that can send events during recording and accept events for replay. The class definition file also includes the definitions for the supported properties.

Silk Test contains several XML files that describe all classes/events/properties for the common Flex common and specialized controls. Those XML files are located in the `<SilkTest_install_directory>\ng\agent\plugins\com.borland.fastxd.techdomain.flex.agent_<version>\config\automationEnvironment` folder.

If you provide your own XML file, you must copy your XML file into this folder. When the Silk Test agent starts and initializes support for Apache Flex, it reads the contents of this directory.

The XML file has the following basic structure:

```
<TypeInfo>
<ClassInfo>
<Implementation />
<Events>
<Event />
...
</Events>
<Properties>
<Property />
...
</Properties>
</ClassInfo>
</TypeInfo>
```

## Setting the Flex automationName Property

The `automationName` property defines the name of a component as it appears in tests. The default value of this property varies depending on the type of component. For example, the `automationName` for a Button control is the label of the Button control. Sometimes, the `automationName` is the same as the `id` property for the control, but this is not always the case.

For some components, Flex sets the value of the `automationName` property to a recognizable attribute of that component. This helps testers recognize the component in their tests. Because testers typically do not have access to the underlying source code of the application, having a control's visible property define that

control can be useful. For example, a Button labeled "Process Form Now" appears in the test as `FlexButton("Process Form Now")`.

If you implement a new component, or derive from an existing component, you might want to override the default value of the `automationName` property. For example, `UIComponent` sets the value of the `automationName` to the component's `id` property by default. However, some components use their own methods for setting the value. For example, in the Flex Store sample application, containers are used to create the product thumbnails. A container's default `automationName` would not be very useful because it is the same as the container's `id` property. So, in Flex Store, the custom component that generates a product thumbnail explicitly sets the `automationName` to the product name to make testing the application easier.

### Example

The following example from the `CatalogPanel.mxml` custom component sets the value of the `automationName` property to the name of the item as it appears in the catalog. This is more recognizable than the default automation name.

```
thumbs[i].automationName = catalog[i].name;
```

### Example

The following example sets the `automationName` property of the `ComboBox` control to "Credit Card List"; rather than using the `id` property, the testing tool typically uses "Credit Card List" to identify the `ComboBox` in its scripts:

```
<?xml version="1.0"?>
<!-- at/SimpleComboBox.mxml -->
<mx:Application xmlns:mx="http://www.adobe.com/2006/mxml">
  <mx:Script>
    <![CDATA[
      [Bindable]
      public var cards: Array = [
        {label:"Visa", data:1},
        {label:"MasterCard", data:2},
        {label:"American Express", data:3}
      ];

      [Bindable]
      public var selectedItem:Object;
    ]>
  </mx:Script>
  <mx:Panel title="ComboBox Control Example">
    <mx:ComboBox id="cbl" dataProvider="{cards}"
      width="150"
      close="selectedItem=ComboBox(event.target).selectedItem"
      automationName="Credit Card List"
    />
    <mx:VBox width="250">
      <mx:Text width="200" color="blue" text="Select a type of
credit card." />
      <mx:Label text="You selected: {selectedItem.label}" />
      <mx:Label text="Data: {selectedItem.data}" />
    </mx:VBox>
  </mx:Panel>
</mx:Application>
```

Setting the value of the `automationName` property ensures that the object name will not change at run time. This helps to eliminate unexpected results.

If you set the value of the `automationName` property, tests use that value rather than the default value. For example, by default, Silk4NET uses a Button control's label property as the name of the Button in the script. If the label changes, the script can break. You can prevent this from happening by explicitly setting the value of the `automationName` property.

Buttons that have no label, but have an icon, are recorded by their index number. In this case, ensure that you set the `automationName` property to something meaningful so that the tester can recognize the Button in the script. After the value of the `automationName` property is set, do not change the value during the component's life cycle. For item renderers, use the `automationValue` property rather than the `automationName` property. To use the `automationValue` property, override the `createAutomationIDPart()` method and return a new value that you assign to the `automationName` property, as the following example shows:

```
<mx:List xmlns:mx="http://www.adobe.com/2006/mxml">
  <mx:Script>
    <![CDATA[
      import mx.automation.IAutomationObject;
      override public function
      createAutomationIDPart(item:IAutomationObject):Object {
        var id:Object = super.createAutomationIDPart(item);
        id["automationName"] = id["automationIndex"];
        return id;
      }
    ]]>
  </mx:Script>
</mx:List>
```

Use this technique to add index values to the children of any container or list-like control. There is no method for a child to specify an index for itself.

## Setting the Flex Select Method to Use Name or Index

You can record Flex Select methods using the Name or Index of the control that you select. By default, Silk Test records Select methods using the name of the control. However, you can change your environment to record Select events using the index for the control, or you can switch between the name and index for recording.

### 1. Determine which class you want to modify to use the Index.

You can record Select events using the index for the following controls:

- FlexList
- FlexTree
- FlexDataGrid
- FlexOLAPDataGrid
- FlexComboBox
- FlexAdvancedDataGrid

### 2. Determine which XML file is related to the class that you want to modify.

The XML files related to the preceding controls include: `FlexCommonControls.xml`, `AdvancedDataGrid.xml`, or `OLAPDataGrid.xml`.

### 3. Navigate to the XML files that are related to the class that you want to modify.

The XML files are located in the `<Silk Test_install_directory>\ng\agent\plugins\com.borland.fastxd.techdomain.flex.agent_<version>\config\automationEnvironment` folder.

### 4. Make the following adaptations in the corresponding XML file.

```
<ClassInfo Extends="FlexList" Name="FlexControlName"
EnableIndexBasedSelection="true" >
```

```
...
</ClassInfo>
```

For instance, you might use "FlexList" as the "FlexControlName" and modify the FlexCommonControls.xml file.

With this adaption the IndexBasedSelection is used for recording FlexList::SelectIndex events.



**Note:** Setting the EnableIndexBasedSelection= to false in the code or removing the boolean returns recording to using the name (FlexList::Select events).

5. Re-start your Flex application and the Open Agent in order for these changes to become active.

## Coding Flex Containers

Containers differ from other kinds of controls because they are used both to record user interactions (such as when a user moves to the next pane in an Accordion container) and to provide unique locations for controls in the testing scripts.

### Adding and Removing Containers from the Automation Hierarchy

In general, the automated testing feature reduces the amount of detail about nested containers in its scripts. It removes containers that have no impact on the results of the test or on the identification of the controls from the script. This applies to containers that are used exclusively for layout, such as the HBox, VBox, and Canvas containers, except when they are being used in multiple-view navigator containers, such as the ViewStack, TabNavigator, or Accordion containers. In these cases, they are added to the automation hierarchy to provide navigation.

Many composite components use containers, such as Canvas or VBox, to organize their children. These containers do not have any visible impact on the application. As a result, you typically exclude these containers from testing because there is no user interaction and no visual need for their operations to be recordable. By excluding a container from testing, the related test script is less cluttered and easier to read.

To exclude a container from being recorded (but not exclude its children), set the container's showInAutomationHierarchy property to false. This property is defined by the UIComponent class, so all containers that are a subclass of UIComponent have this property. Children of containers that are not visible in the hierarchy appear as children of the next highest visible parent.

The default value of the showInAutomationHierarchy property depends on the type of container. For containers such as Panel, Accordion, Application, DividedBox, and Form, the default value is true; for other containers, such as Canvas, HBox, VBox, and FormItem, the default value is false.

The following example forces the VBox containers to be included in the test script's hierarchy:

```
<?xml version="1.0"?>
<!-- at/NestedButton.mxml -->
<mx:Application xmlns:mx="http://www.adobe.com/2006/mxml">
<mx:Panel title="ComboBox Control Example">
<mx:HBox id="hb">
<mx:VBox id="vb1" showInAutomationHierarchy="true">
<mx:Canvas id="c1">
<mx:Button id="b1" automationName="Nested Button 1" label="Click Me" />
</mx:Canvas>
</mx:VBox>
<mx:VBox id="vb2" showInAutomationHierarchy="true">
<mx:Canvas id="c2">
<mx:Button id="b2" automationName="Nested Button 2" label="Click Me 2" />
</mx:Canvas>
</mx:VBox>
</mx:HBox>
</mx:Panel>
</mx:Application>
```

## Multiview Containers

Avoid using the same label on multiple tabs in multiview containers, such as the TabNavigator and Accordion containers. Although it is possible to use the same labels, this is generally not an acceptable UI design practice and can cause problems with control identification in your testing environment.

## Flex Automation Testing Workflow

The Silk4NET workflow for testing Flex applications includes:

- Automated Testing Initialization
- Automated Testing Recording
- Automated Testing Playback

### Flex Automated Testing Initialization

When the user launches the Flex application, the following initialization events occur:

1. The automation initialization code associates component delegate classes with component classes.
2. The component delegate classes implement the `IAutomationObject` interface.
3. An instance for the `AutomationManager` is created in the mixin `init()` method. (The `AutomationManager` is a mixin.)
4. The `SystemManager` initializes the application. Component instances and their corresponding delegate instances are created. Delegate instances add event listeners for events of interest.
5. The Silk4NET `FlexTechDomain` is a mixin. In the `FlexTechDomain init()` method, the `FlexTechDomain` registers for the `SystemManager.APPLICATION_COMPLETE` event. When the event is received, it creates a `FlexTechDomain` instance.
6. The `FlexTechDomain` instance connects via a TCP/IP socket to the Silk Test Agent on the same machine that registers for record/playback functionality.
7. The `FlexTechDomain` requests information about the automation environment. This information is stored in XML files and is forwarded from the Silk Test Agent to the `FlexTechDomain`.

### Flex Automated Testing Recording

When the user records a new test in Silk4NET for a Flex application, the following events occur:

1. Silk4NET calls the Silk Test Agent to start recording. The Agent forwards this command to the `FlexTechDomain` instance.
2. `FlexTechDomain` notifies `AutomationManager` to start recording by calling `beginRecording()`. The `AutomationManager` adds a listener for the `AutomationRecordEvent.RECORD` event from the `SystemManager`.
3. The user interacts with the application. For example, suppose the user clicks a Button control.
4. The `ButtonDelegate.clickEventHandler()` method dispatches an `AutomationRecordEvent` event with the click event and Button instance as properties.
5. The `AutomationManager` record event handler determines which properties of the click event to store based on the XML environment information. It converts the values into proper type or format. It dispatches the record event.
6. The `FlexTechDomain` event handler receives the event. It calls the `AutomationManager.createID()` method to create the `AutomationID` object of the button. This object provides a structure for object identification. The `AutomationID` structure is an array of `AutomationIDParts`. An `AutomationIDPart` is created by using `IAutomationObject`. (The `UIComponent.id`, `automationName`, `automationValue`, `childIndex`, and `label` properties of the Button control are read and stored in the object. The `label` property is used because the XML information specifies that this property can be used for identification for the Button.)
7. `FlexTechDomain` uses the `AutomationManager.getParent()` method to get the logical parent of Button. The `AutomationIDPart` objects of parent controls are collected at each level up to the application level.

8. All the AutomationIDParts are included as part of the AutomationID object.
9. The FlexTechDomain sends the information in a call to Silk4NET.
10. When the user stops recording, the `FlexTechDomain.endRecording()` method is called.

### Flex Automated Testing Playback

When the user clicks the **Playback** button in Silk4NET, the following events occur:

1. For each script call, Silk4NET contacts the Silk Test Agent and sends the information for the script call to be executed. This information includes the complete window declaration, the event name, and parameters.
2. The Silk Test Agent forwards that information to the FlexTechDomain.
3. The FlexTechDomain uses `AutomationManager.resolveIDToSingleObject` with the window declaration information. The `AutomationManager` returns the resolved object based on the descriptive information (automationName, automationIndex, id, and so on).
4. Once the Flex control is resolved, FlexTechDomain calls `AutomationManager.replayAutomatableEvent()` to replay the event.
5. The `AutomationManager.replayAutomatableEvent()` method invokes the `IAutomationObject.replayAutomatableEvent()` method on the delegate class. The delegate uses the `IAutomationObjectHelper.replayMouseEvent()` method (or one of the other replay methods, such as `replayKeyboardEvent()`) to play back the event.
6. If there are verifications in your script, FlexTechDomain invokes `AutomationManager.getProperties()` to access the values that must be verified.

## Styles in Apache Flex Applications

For applications developed in Apache Flex 3.x, Silk4NET does not distinguish between styles and properties. As a result, styles are exposed as properties. However, with Apache Flex 4.x, all new Flex controls, which are prefixed with `Spark`, such as `SparkButton`, do not expose styles as properties. As a result, the `GetProperty()` and `GetPropertyList()` methods for Flex 4.x controls do not return styles, such as `color` or `fontSize`, but only properties, such as `text` and `name`.

The `GetStyle(string styleName)` method returns values of styles as a string. To find out which styles exist, refer to the Adobe help located at: [http://help.adobe.com/en\\_US/FlashPlatform/reference/actionsript/3/package-detail.html](http://help.adobe.com/en_US/FlashPlatform/reference/actionsript/3/package-detail.html).

If the style is not set, a `StyleNotSetException` occurs during playback.

For the Flex 3.x controls, such as `FlexTree`, you can use `GetProperty()` to retrieve styles. Or, you can use `GetStyle()`. Both the `GetProperty()` and `GetStyle()` methods work with Flex 3.x controls.

### Calculating the Color Style

In Flex, the color is represented as number. It can be calculated using the following formula:

```
red*65536 + green*256 + blue
```

#### Example

In the following example, the script verifies whether the `buttonBar` in the `Spark` application uses font size 12.

```
Imports SilkTest.Ntf.Flex

Public Module Main
    Dim _desktop As Desktop = Agent.Desktop

    Public Sub Main()
        Dim Application As SparkApplication
        Dim ButtonBar As SparkButtonBar
```

```

        Application = _desktop.Find( "/BrowserApplication//
BrowserWindow//
        SparkApplication" )
        ButtonBar = Application.SparkButtonBar()

        Workbench.Verify(ButtonBar.GetStyle( "fontSize" ),
"12" )
    End Sub
End Module

```

## Configuring Flex Applications for Adobe Flash Player Security Restrictions

The security model in Adobe Flash Player 10 has changed from earlier versions. When you record tests that use Flash Player, recording works as expected. However, when you play back tests, unexpected results occur when high-level clicks are used in certain situations. For instance, a **File Reference** dialog box cannot be opened programmatically and when you attempt to play back this scenario, the test fails because of security restrictions.

To work around the security restrictions, you can perform a low-level click on the button that opens the dialog box. To create a low-level click, add a parameter to the `Click` method.

For example, instead of using `SparkButton::Click()`, use `SparkButton::Click(MouseButton.Left)`. A `Click()` without parameters is a high-level click and a click with parameters (such as the button) is replayed as a low-level click.

1. Record the steps that use Flash Player.
2. Navigate to the `Click` method and add a parameter.  
For example, to open the **Open File** dialog box, specify:

```
SparkButton("@caption='Open File Dialog...']").Click(MouseButton.Left)
```

When you play back the test, it works as expected.

## Attributes for Apache Flex Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Flex applications include:

- automationName
- caption (similar to automationName)
- automationClassName (e.g. `FlexButton`)
- className (the full qualified name of the implementation class, e.g. `mx.controls.Button`)
- automationIndex (the index of the control in the view of the FlexAutomation, e.g. `index:1`)
- index (similar to automationIndex but without the prefix, e.g. `1`)
- id (the id of the control)
- windowId (similar to id)
- label (the label of the control)
- All dynamic locator attributes



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards `?` and `*`.

For additional information on dynamic locator attributes, see *Dynamic Locator Attributes*.

# Why Cannot Silk4NET Recognize Apache Flex Controls?

If Silk4NET cannot recognize the controls of an Apache Flex application, which you are accessing through a Web server, you can try the following things:

- Compile your Apache Flex application with the Adobe automation libraries and the appropriate `FlexTechDomain.swc` for the Apache Flex version.
- Use runtime loading.
- Apache Flex controls are not recognized when embedding an Apache Flex application with an empty `id` attribute.

## Java AWT/Swing Support

Silk4NET provides built-in support for testing applications or applets that use the Java AWT/Swing controls. When you configure an application or applet that uses Java AWT/Swing, Silk4NET automatically provides support for testing standard AWT/Swing controls.



**Note:** You can also test Java SWT controls embedded in Java AWT/Swing applications or applets as well as Java AWT/Swing controls embedded in Java SWT applications.



**Note:** Image click recording is not supported for applications or applets that use the Java AWT/Swing controls.

### Sample Applications

Silk Test provides a sample Swing test application. Download and install the sample applications from <http://supportline.microfocus.com/websync/SilkTest.aspx>. After you have installed the sample applications, click (in Microsoft Windows 7) **Start > Programs > Silk > Silk Test > Sample Applications > Java Swing > Swing Test Application** or (in Microsoft Windows 10) **Start > Silk**.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

### Supported Controls

For a complete list of the controls available for Java AWT/Swing testing, see *Java Swing Class Reference*.

## Attributes for Java AWT/Swing Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Java AWT/Swing include:

- `caption`
- `priorlabel`: Helps to identify text input fields by the text of its adjacent label field. Every input field of a form usually has a label that explains the purpose of the input. For controls that do not have a caption, the attribute `priorlabel` is automatically used in the locator. For the `priorlabel` value of a control, for example a text input field, the caption of the closest label at the left side or above the control is used.
- `name`
- `accessibleName`
- *Swing only*: All custom object definition attributes set in the widget with `putClientProperty("propertyName", "propertyValue")`



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

## Dynamically Invoking Java Methods

Dynamic invoke enables you to directly call methods, retrieve properties, or set properties, on an actual instance of a control in the application under test. You can also call methods and properties that are not available in the Silk4NET API for this control. Dynamic invoke is especially useful when you are working with custom controls, where the required functionality for interacting with the control is not exposed through the Silk4NET API.

Call dynamic methods on objects with the `Invoke` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Call multiple dynamic methods on objects with the `InvokeMethods` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Retrieve dynamic properties with the `GetProperty` method and set dynamic properties with the `SetProperty` method. To retrieve a list of supported dynamic properties for a control, use the `GetPropertyList` method.

For example, to call a method named `SetTitle`, which requires the title to be set as an input parameter of type string, on an actual instance of a control in the application under test, type the following:

```
control.Invoke("SetTitle", "my new title")
```



**Note:** Typically, most properties are read-only and cannot be set.



**Note:** Reflection is used in most technology domains to call methods and retrieve properties.

### Supported Methods and Properties

The following methods and properties can be called:

- Methods and properties that Silk4NET supports for the control.
- All public methods of the SWT, AWT, or Swing widget
- If the control is a custom control that is derived from a standard control, all methods and properties from the standard control can be called.

### Supported Parameter Types

The following parameter types are supported:

- Primitive types (boolean, integer, long, double, string)

Both primitive types, such as `int`, and object types, such as `java.lang.Integer` are supported. Primitive types are widened if necessary, allowing, for example, to pass an `int` where a `long` is expected.

- Enum types

Enum parameters must be passed as string. The string must match the name of an enum value. For example, if the method expects a parameter of the enum type, `java.sql.ClientInfoStatus` you can use the string values of `REASON_UNKNOWN`, `REASON_UNKNOWN_PROPERTY`, `REASON_VALUE_INVALID`, or `REASON_VALUE_TRUNCATED`

- Lists

Allows calling methods with list, array, or var-arg parameters. Conversion to an array type is done automatically, provided the elements of the list are assignable to the target array type.

- Other controls

Control parameters can be passed or returned as `TestObject`.

### Returned Values

The following values are returned for properties and methods that have a return value:

- The correct value for all built-in Silk4NET types. These types are listed in the *Supported Parameter Types* section.
- All methods that have no return value return `null` in C# or `Nothing` in VB.

## Determining the priorLabel in the Java AWT/Swing Technology Domain

To determine the `priorLabel` in the Java AWT/Swing technology domain, all labels and groups in the same window as the target control are considered. The decision is then made based upon the following criteria:

- Only labels either above or to the left of the control, and groups surrounding the control, are considered as candidates for a `priorLabel`.
- If a parent of the control is a `JViewport` or a `ScrollPane`, the algorithm works as if the parent is the window that contains the control, and nothing outside is considered relevant.
- In the simplest case, the label closest to the control is used as the `priorLabel`.
- If two labels have the same distance to the control, and one is to the left and the other above the control, the left one is preferred.
- If no label is eligible, the caption of the closest group is used.

## Oracle Forms Support

This functionality is supported only if you are using the Open Agent.

Silk4NET provides built-in support for testing applications that are based on Oracle Forms.



**Note:** For some controls, Silk4NET provides only low-level recording support.

For information on the supported versions and browsers for Oracle Forms, refer to the [Release Notes](#).

### Prerequisites for Testing Oracle Forms

To test an application that is built with Oracle Forms, the following prerequisites need to be fulfilled:

- The next-generation Java Plug-In needs to be enabled. This setting is enabled by default. You can change the setting in the **Java Control Panel**. For additional information on the next-generation Java Plug-In, refer to the Java documentation.
- To prevent Java security dialogs from displaying during a test run, the Applet needs to be signed.
- Micro Focus recommends enabling the `Names` property. When this property is enabled, the Oracle Forms runtime exposes the internal `name`, which is the name that the developer of the control has specified for the control, as the `Name` property of the control. Otherwise, the `Name` property will hold a calculated value, which usually consists of the class name of the control plus an index. This enables Silk4NET to generate stable locators for controls.

### Attributes for Oracle Forms Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Oracle Forms include:

- **priorlabel**: Helps to identify text input fields by the text of its adjacent label field. Every input field of a form usually has a label that explains the purpose of the input. For controls that do not have a caption, the attribute **priorlabel** is automatically used in the locator. For the **priorlabel** value of a control, for example a text input field, the caption of the closest label at the left side or above the control is used.
- **name**
- **accessibleName**



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

## Java SWT and Eclipse RCP Support

Silk Test provides built-in support for testing applications that use widgets from the Standard Widget Toolkit (SWT) controls. When you configure a Java SWT/RCP application, Silk Test automatically provides support for testing standard Java SWT/RCP controls.

Silk Test supports:

- Testing Java SWT controls embedded in Java AWT/Swing applications as well as Java AWT/Swing controls embedded in Java SWT applications.
- Testing Java SWT applications.
- Any Eclipse-based application that uses SWT widgets for rendering. Silk Test supports both Eclipse IDE-based applications and RCP-based applications.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

### Supported Controls

For a complete list of the widgets available for SWT testing, see *Java SWT Class Reference*.

## Java SWT Class Reference

When you configure a Java SWT application, Silk4NET automatically provides built-in support for testing standard Java SWT controls.

## Java SWT Custom Attributes

You can add custom attributes to a test application to make a test more stable. For example, in Java SWT, the developer implementing the GUI can define an attribute (for example, 'silkTestAutomationId') for a widget that uniquely identifies the widget in the application. A tester using Silk4NET can then add that attribute to the list of custom attributes (in this case, 'silkTestAutomationId'), and can identify controls by that unique ID. Using a custom attribute is more reliable than other attributes like caption or index, since a caption will change when you translate the application into another language, and the index will change whenever another widget is added before the one you have defined already.

If more than one object is assigned the same custom attribute value, all the objects with that value will return when you call the custom attribute. For example, if you assign the unique ID, 'loginName' to two different text fields, both fields will return when you call the 'loginName' attribute.

### Java SWT Example

If you create a button in the application that you want to test using the following code:

```
Button myButton = Button(parent, SWT.NONE);
myButton.setData("SilkTestAutomationId", "myButtonId");
```

To add the attribute to your XPath query string in your test, you can use the following query:

```
Dim button =  
desktop.PushButton( "@SilkTestAutomationId= 'myButton' " )
```

To enable a Java SWT application for testing custom attributes, the developers must include custom attributes in the application. Include the attributes using the `org.swt.widgets.Widget.setData(String key, Object value)` method.

## Attributes for Java SWT Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Java SWT include:

- caption
- all custom object definition attributes



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards `?` and `*`.

## Dynamically Invoking Java Methods

Dynamic invoke enables you to directly call methods, retrieve properties, or set properties, on an actual instance of a control in the application under test. You can also call methods and properties that are not available in the Silk4NET API for this control. Dynamic invoke is especially useful when you are working with custom controls, where the required functionality for interacting with the control is not exposed through the Silk4NET API.

Call dynamic methods on objects with the `Invoke` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Call multiple dynamic methods on objects with the `InvokeMethods` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Retrieve dynamic properties with the `GetProperty` method and set dynamic properties with the `SetProperty` method. To retrieve a list of supported dynamic properties for a control, use the `GetPropertyList` method.

For example, to call a method named `SetTitle`, which requires the title to be set as an input parameter of type string, on an actual instance of a control in the application under test, type the following:

```
control.Invoke( "SetTitle", "my new title" )
```



**Note:** Typically, most properties are read-only and cannot be set.



**Note:** Reflection is used in most technology domains to call methods and retrieve properties.

### Supported Methods and Properties

The following methods and properties can be called:

- Methods and properties that Silk4NET supports for the control.
- All public methods of the SWT, AWT, or Swing widget
- If the control is a custom control that is derived from a standard control, all methods and properties from the standard control can be called.

## Supported Parameter Types

The following parameter types are supported:

- Primitive types (boolean, integer, long, double, string)

Both primitive types, such as `int`, and object types, such as `java.lang.Integer` are supported. Primitive types are widened if necessary, allowing, for example, to pass an `int` where a `long` is expected.

- Enum types

Enum parameters must be passed as string. The string must match the name of an enum value. For example, if the method expects a parameter of the enum type, `java.sql.ClientInfoStatus` you can use the string values of `REASON_UNKNOWN`, `REASON_UNKNOWN_PROPERTY`, `REASON_VALUE_INVALID`, or `REASON_VALUE_TRUNCATED`

- Lists

Allows calling methods with list, array, or var-arg parameters. Conversion to an array type is done automatically, provided the elements of the list are assignable to the target array type.

- Other controls

Control parameters can be passed or returned as `TestObject`.

## Returned Values

The following values are returned for properties and methods that have a return value:

- The correct value for all built-in Silk4NET types. These types are listed in the *Supported Parameter Types* section.
- All methods that have no return value return `null` in C# or `Nothing` in VB.

# Troubleshooting Java SWT and Eclipse Applications

## Some SWTTree methods do not replay with low-level playback

When using low-level playback, some SWTTree methods, for example `Expand` and `Collapse`, do not replay.

To solve this problem, set the replay mode to **Default**. For additional information, see *Setting Replay Options*.

## Selecting a non-visible node in an SWTTree

When using low-level playback, Silk4NET cannot interact with non-visible nodes in an SWTTree.

To solve this problem, set the replay mode to **Default**. For additional information, see *Setting Replay Options*.

# Testing Mobile Applications

Silk4NET enables you to automatically test your native mobile applications (apps) and mobile web applications. Automatically testing your mobile applications with Silk4NET provides the following benefits:

- It can significantly reduce the testing time of your mobile applications.
- You can create your tests once and then test your mobile applications on a large number of different devices and platforms.
- You can ensure the reliability and performance that is required for enterprise mobile applications.
- It can increase the efficiency of QA team members and mobile application developers.

- Manual testing might not be efficient enough for an agile-focused development environment, given the large number of mobile devices and platforms on which a mobile application needs to function.



**Note:** To test native mobile applications or hybrid applications with Silk4NET, you require a native mobile license. For additional information, see *Licensing Information*.



**Note:** Silk4NET provides support for testing mobile apps on both Android and iOS devices.

For information on the supported operating system versions and the supported browsers for testing mobile applications, refer to the [Release Notes](#).

## Android

Silk4NET enables you to test a mobile application on an Android device or an Android emulator.

### Prerequisites for Testing Mobile Applications on Android

Before you can test a mobile application (app) on an Android device or on an Android emulator, ensure that the following prerequisites are met:

- Ensure that Java is installed on the machine on which Silk4NET is running, and that the path to Java is added to the *Path* environment variable. Silk4NET requires either a JRE or a JDK for mobile testing. If Java is not installed, add `C:\Program Files (x86)\Silk\SilkTest\ng\jre\bin` to the *Path*.
- If you have created your own hybrid app by adding a web view to a native mobile app, add the following code to the app to make your app testable with Silk4NET:

```
WebView.setWebContentsDebuggingEnabled(true);  
webView.getSettings().setJavaScriptEnabled(true);
```

- Silk4NET does not support showing a live view of the device screen for Android 4.4. Micro Focus recommends using Android 5 or later.

### Testing Mobile Applications on Android

To test a mobile application on a physical Android device or on an Android emulator, perform the following tasks:

1. Ensure that you have met the prerequisites for testing mobile applications on Android.  
For additional information, see [Prerequisites for Testing Mobile Applications on Android](#).
2. If you want to test the mobile application on an Android emulator, configure the emulator settings for Silk4NET.  
For additional information, see [Configuring the Android Emulator for Silk Test](#).
3. Start the Android emulator or connect the device to the machine on which Silk4NET is installed.
4. If you want to test the mobile application on a physical Android device that you are using for the first time on this machine, install the appropriate Android USB Driver on the machine.  
For additional information, see [Installing a USB Driver](#).
5. If you want to test the mobile application on a physical Android device, enable USB-debugging on the Android device.  
For additional information, see [Enabling USB-Debugging](#).
6. Create a Silk4NET project for your mobile application.
7. Create a test for your mobile application.
8. Record the actions that you want to execute in the test. When you start the **Recording** window, the **Select Application** dialog box opens.
9. To test a mobile web application:
  - a) Select the **Web** tab.
  - b) Select the mobile browser that you want to use.

c) Specify the web page to open in the **Enter URL to navigate** text box.

10. To test a native mobile application or a Hybrid application:

 **Note:** To test native mobile applications or hybrid applications with Silk4NET, you require a native mobile license. For additional information, see *Licensing Information*.

a) Select the **Mobile** tab.

b) Select the mobile device, on which you want to test the app, from the list.

c) Click **Browse** to select the app file or enter the full path to the app file into the **Mobile app file** text field.

Silk4NET supports HTTP and UNC formats for the path.

Silk4NET installs the app on the mobile device or emulator.

11. Click **OK**.

An Android device or emulator must not be screen-locked during testing. To keep the device awake while it is connected to a machine, open the settings and tap **Developer Options**. Then check **Stay awake** or **Stay awake while charging**.

12. Use the **Recording** window to record the test against the mobile application.

For additional information, see *Recording Mobile Applications*.

13. When you have recorded all the actions, stop the recording.

14. Replay the test.

15. Analyze the test results.

## Testing Hybrid Applications on Android

*Hybrid applications* (apps) are apps that are run on the device, like native applications, but are written with web technologies, for example HTML5, CSS, and JavaScript.

Silk4NET supports testing hybrid apps that consist of a single web view which is embedded in a native container. A common example of such a hybrid app would be an Apache Cordova application.

Silk4NET can detect web views that support Chrome remote debugging. Silk4NET can detect web views with either the package *com.android.webview* or the package *com.google.android.webview*, which are the default packages on most Android devices.

 **Note:** Silk4NET supports testing hybrid apps on Android 4.4 or later. To test hybrid apps on Android 6.0 or later, Android System WebView version 51 or later is required.

The process for testing a hybrid app on Android is the same as the process for testing a mobile native application. For additional information, see *Testing Mobile Applications on Android*.

## Installing a USB Driver

To connect an Android device for the first time to your local machine to test your mobile applications, you need to install the appropriate USB driver.

The device manufacturer might provide an executable with all the necessary drivers for the device. In this case you can just install the executable on your local machine. If the manufacturer does not provide such an executable, you can install a single USB driver for the device on the machine.

To install the Android USB driver:

1. Download the appropriate driver for your device.

For example, for information on finding and installing a USB driver for a Google Nexus device, see <http://developer.android.com/tools/extras/oem-usb.html>.

2. Connect your Android device to a USB port on your local machine.

3. From your desktop or **Windows Explorer**, right-click **Computer** and select **Manage**.

4. In the left pane, select **Device Manager**.

5. In the right pane, locate and expand **Other device**.
6. Right-click the device name, for example *Nexus 5x*, and select **Update Driver Software**. The **Hardware Update Wizard** opens.
7. Select **Browse my computer for driver software** and click **Next**.
8. Click **Browse** and navigate to the folder to which you have downloaded the USB driver.
9. Select the USB driver.
10. Click **Next** to install the driver.

## Enabling USB-Debugging

To communicate with an Android device over the Android Debug Bridge (adb), enable USB debugging on the device.

1. On the Android device, open the settings.
2. Tap **Developer Settings**.

The developer settings are hidden by default. If the developer settings are not included in the settings menu of the device:

- a) Depending on whether the device is a phone or a pad, scroll down and tap **About phone** or **About Pad**.
- b) Scroll down again and tap **Build Number** seven times.

3. In the **Developer settings** window, check **USB-Debugging**.
4. Set the USB mode of the device to **Media device (MTP)**, which is the default setting.  
For additional information, refer to the documentation of the device.

## Recommended Settings for Android Devices

To optimize testing with Silk4NET, configure the following settings on the Android device that you want to test:

- Enable USB-debugging on the Android device. For additional information, see [Enabling USB-Debugging](#)
- An Android device must be connected as a media device to the machine on which the Open Agent is running. The USB mode of the Android device must be set to **Media device (MTP)**.
- An Android device or emulator must not be screen-locked during testing. To keep the device awake while it is connected to a machine, open the settings and tap **Developer Options**. Then check **Stay awake** or **Stay awake while charging**.

## Configuring the Android Emulator for Silk4NET

When you want to test mobile applications on an Android emulator with Silk4NET, you have to configure the emulator for testing:

1. Install the latest version of the Android SDK.

For information on how to install and configure the Android SDK, see [Get the Android SDK](#).

2. Install Android Studio 2.




**Tip:** You can skip installing Android Studio 2 and use the emulator provided with the Android SDK. However, Micro Focus recommends installing Android Studio 2 for improved emulator performance. The remaining steps in this topic require Android Studio 2 to be installed.

3. From Android Studio 2, start the **AVD Manager**.
4. Click **Create Virtual Device**.
5. Select a virtual device.
6. Click **Next**.
7. Download and select a system image of Android that includes Google APIs.

8. Click **Next**.
9. Configure the virtual device according to your requirements.
10. Click **Show Advanced Settings**.
11. Adjust the RAM size and the heap space used by the emulator to an amount that is manageable by your machine.

 **Tip:** Micro Focus recommends using at least 1 GB RAM and 256 MB heap space.

12. Select **Auto** from the list in the **Emulated Performance** area.

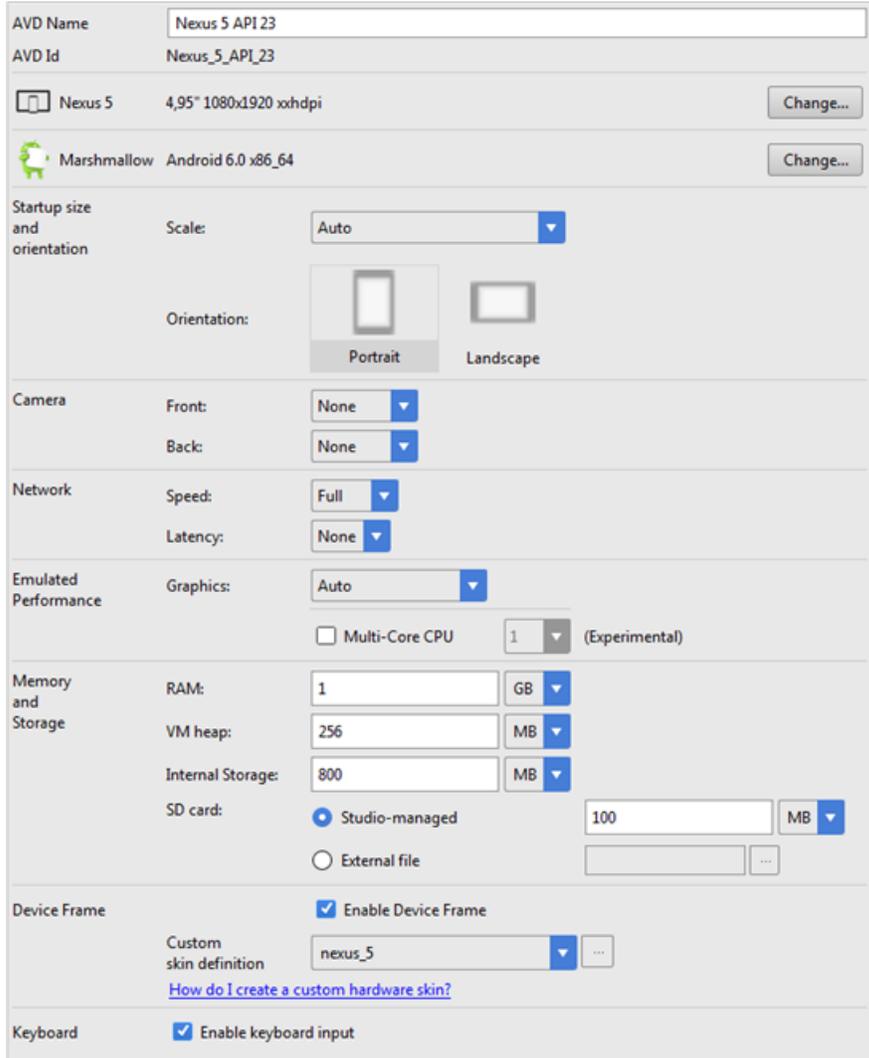

The screenshot shows the AVD Manager configuration screen for a Nexus 5 virtual device. The settings are as follows:

- AVD Name:** Nexus 5 API 23
- AVD Id:** Nexus\_5\_API\_23
- Device:** Nexus 5, 4.95" 1080x1920 xxhdpi
- OS:** Marshmallow, Android 6.0 x86\_64
- Startup size and orientation:** Scale: Auto, Orientation: Portrait
- Camera:** Front: None, Back: None
- Network:** Speed: Full, Latency: None
- Emulated Performance:** Graphics: Auto, Multi-Core CPU: 1 (Experimental)
- Memory and Storage:** RAM: 1 GB, VM heap: 256 MB, Internal Storage: 800 MB, SD card: Studio-managed (100 MB)
- Device Frame:** Enable Device Frame: checked, Custom skin definition: nexus\_5
- Keyboard:** Enable keyboard input: checked

13. Click **Finish**.

## iOS

Silk4NET enables you to test a mobile application on an iOS device or an iOS Simulator.

### Prerequisites for Testing Mobile Applications on iOS

Before you can test a mobile application (app) on an iOS device or on an iOS Simulator, ensure that the following prerequisites are met:

- Ensure that Java is installed on the machine on which Silk4NET is running, and that the path to Java is added to the *Path* environment variable. Silk4NET requires either a JRE or a JDK for mobile testing. If

Java is not installed, add `C:\Program Files (x86)\Silk\SilkTest\ng\jre\bin` to the *Path* and restart the machine.

- The iOS device is connected to a Mac or the desired iOS Simulator image is installed on a Mac.
- The information service is installed on the Mac. For additional information, see [Installing the Silk Test Infoservice on a Mac](#).
- A supported version of Xcode is installed on the Mac. For information about the supported versions of Xcode, refer to the [Release Notes](#).
- Silk4NET is installed on a Windows machine.
- The Mac is located in the same network as the Windows machine and is added as a remote location to the Windows machine.
- To test a native mobile app on an iOS device, ensure that the `.ipa` file of your app has been signed with a developer account. For additional information, see [Preparing an iOS App for Testing](#).
- To test a native mobile app on an iOS Simulator, ensure that the app has been zipped. For additional information, see [Testing Native Mobile Applications on an iOS Simulator](#).
- To test a native mobile app on both an iOS device and an iOS Simulator, ensure that both the signed `.ipa` file and the zipped `.app` directory are located in the same folder.
- If you want to test a native mobile app, ensure that the ID of the iOS device is associated with the developer profile which was used to sign the app.
- If you want to test a mobile web application, use Xcode to build the `SafariLauncher.app`. The files that are required to build the app are located under `/Applications/Silk/Mobile/osx/Appium/node_modules/appium/node_modules/appium-ios-driver/node_modules/safari-launcher`. The output must be generated to the folder `/Applications/Silk/Mobile/osx/Appium/node_modules/appium/node_modules/appium-ios-driver/build/SafariLauncher`.
- The iOS device must not fall into sleep mode during testing. To turn the screen lock and password off, select **Settings > General > Passcode Lock**.
- The Mac should not switch off the screen during testing, otherwise the **Playback Status** dialog box will not display anything.
- If you want to test a mobile application on an iOS Simulator, the Mac, on which the iOS Simulator is installed, must not have the display sleep activated during testing.
- To test a native mobile app on a physical iOS device, enable the UI automation on the device. For additional information, see [Preparing an iOS Device for Testing](#).
- To test a mobile web application with Apple Safari on a physical iOS device, activate the **Web Inspector**. For additional information, see [Preparing an iOS Device for Testing](#).
- Micro Focus recommends using iOS devices which have a Lightning connector. Silk4NET does not support showing a live view of the device screen for iOS devices that are not connected to a Mac through a Lightning cable.

## Testing Native Mobile Applications on a Physical iOS Device



**Note:** To test native mobile applications or hybrid applications with Silk4NET, you require a native mobile license. For additional information, see [Licensing Information](#).

To test a native mobile application (app) or a hybrid application on a physical iOS device, perform the following tasks:

1. Prepare the iOS device for testing.  
For additional information, see [Preparing an iOS Device for Testing](#).
2. Prepare the app for testing.  
For additional information, see [Preparing an iOS App for Testing](#).
3. Add the Mac, to which the iOS device is connected, as a remote location to the Windows machine on which Silk Test is installed.  
For additional information, see [Editing Remote Locations](#).

 **Note:** At any given point in time, each user on a Mac can only test on one iOS device that is connected to the Mac or on one iOS Simulator that is running on the Mac. To test on multiple iOS devices or iOS Simulators on the same Mac, a user session on the Mac is required for each device and Simulator. For additional information, see [Testing Multiple iOS Simulators on the Same Mac](#).

4. Create a Silk4NET project for your mobile application.
5. Create a test for your mobile application.
6. Record the actions that you want to execute in the test. When you start the **Recording** window, the **Select Application** dialog box opens.
7. Select the **Mobile** tab.
8. Select the mobile device, on which you want to test the app, from the list.
9. Click **Browse** to select the app file or enter the full path to the app file into the **Mobile app file** text field. Silk4NET supports HTTP and UNC formats for the path. Silk4NET installs the app on the mobile device.
10. Click **OK**.

An iOS device or Simulator must not fall into sleep mode during testing. To turn the screen lock and password off, select **Settings > General > Passcode Lock**.
11. When you have recorded all actions, stop recording.
12. Replay the test.
13. Analyze the test results.

 **Note:** To test a native mobile app on both an iOS device and an iOS Simulator, ensure that both the signed `.ipa` file and the zipped `.app` directory are located in the same folder.

## Testing Native Mobile Applications on an iOS Simulator

 **Note:** To test native mobile applications or hybrid applications with Silk4NET, you require a native mobile license. For additional information, see [Licensing Information](#).

To test a native mobile application (app) or a hybrid application on an iOS Simulator, perform the following tasks:

1. In the Xcode project of the app, compile the app for the iOS Simulator.

You can compile the app either from the Xcode UI or from the command line. For example, to compile the app through the command line for an iOS Simulator with iOS 9.2, execute the following command:

```
xcodebuild -sdk iphonesimulator9.2
```
2. Zip up the `.app` directory of the app into a `.zip` file.

By default, the `.app` directory is located in the directory `~/Library/Developer/Xcode/DerivedData`. You can click **File > Project Settings** in Xcode to see into which location the directory is stored.
3. Add the Mac, on which the iOS Simulator is installed, as a remote location to the Windows machine on which Silk4NET is installed.

For additional information, see [Editing Remote Locations](#).

 **Note:** You can only test on one iOS Simulator that is installed on a Mac. Multiple Silk4NET users cannot simultaneously test on multiple iOS Simulators that are installed on the same Mac.

4. Create a Silk4NET project for your mobile application.
5. Create a test for your mobile application.
6. Record the actions that you want to execute in the test. When you start the **Recording** window, the **Select Application** dialog box opens.
7. Select the **Mobile** tab.
8. Select the iOS Simulator from the list.

9. Click **Browse** to select the zipped app file or enter the full path to the zipped app file into the **Mobile app file** text field.

Silk4NET supports HTTP and UNC formats for the path.

Silk4NET installs the app on the iOS Simulator.

10. Click **OK**.

An iOS device or Simulator must not fall into sleep mode during testing. To turn the screen lock and password off, select **Settings > General > Passcode Lock**.

11. When you have recorded all actions, stop recording.

12. Replay the test.

13. Analyze the test results.



**Note:** To test a native mobile app on both an iOS device and an iOS Simulator, ensure that both the signed `.ipa` file and the zipped `.app` directory are located in the same folder.

## Testing Mobile Web Applications on a Physical iOS Device

To test a mobile web application on a physical iOS device, perform the following tasks:

1. Prepare the iOS device for testing.

For additional information, see [Preparing an iOS Device for Testing](#).

2. Add the Mac, to which the iOS device is connected, as a remote location to the Windows machine on which Silk Test is installed.

For additional information, see [Editing Remote Locations](#).



**Note:** At any given point in time, each user on a Mac can only test on one iOS device that is connected to the Mac or on one iOS Simulator that is running on the Mac. To test on multiple iOS devices or iOS Simulators on the same Mac, a user session on the Mac is required for each device and Simulator. For additional information, see [Testing Multiple iOS Simulators on the Same Mac](#).

3. Create a Silk4NET project for your mobile application.

4. Create a test for your mobile application.

5. Record the actions that you want to execute in the test. When you start the **Recording** window, the **Select Application** dialog box opens.

6. To test a mobile web application:

a) Select the **Web** tab.

b) Select the mobile browser that you want to use.

c) Specify the web page to open in the **Enter URL to navigate** text box.

7. Click **OK**.

An iOS device or Simulator must not fall into sleep mode during testing. To turn the screen lock and password off, select **Settings > General > Passcode Lock**.

8. When you have recorded all actions, stop recording.

9. Replay the test.

10. Analyze the test results.

## Testing Mobile Web Applications on an iOS Simulator

To test a mobile web application on an iOS Simulator, perform the following tasks:

1. Add the Mac, to which the iOS device is connected, as a remote location to the Windows machine on which Silk Test is installed.

For additional information, see [Editing Remote Locations](#).



**Note:** At any given point in time, each user on a Mac can only test on one iOS device that is connected to the Mac or on one iOS Simulator that is running on the Mac. To test on multiple iOS

devices or iOS Simulators on the same Mac, a user session on the Mac is required for each device and Simulator. For additional information, see [Testing Multiple iOS Simulators on the Same Mac](#).

2. Create a Silk4NET project for your mobile application.
3. Create a test for your mobile application.
4. Record the actions that you want to execute in the test. When you start the **Recording** window, the **Select Application** dialog box opens.
5. To test a mobile web application:
  - a) Select the **Web** tab.
  - b) Select the mobile browser that you want to use.
  - c) Specify the web page to open in the **Enter URL to navigate** text box.
6. Click **OK**.

An iOS device or Simulator must not fall into sleep mode during testing. To turn the screen lock and password off, select **Settings > General > Passcode Lock**.
7. When you have recorded all actions, stop recording.
8. Replay the test.
9. Analyze the test results.

## Testing Hybrid Applications on iOS

*Hybrid applications* (apps) are apps that are run on the device, like native applications, but are written with web technologies, for example HTML5, CSS, and JavaScript.

Silk4NET supports testing hybrid apps that consist of a single web view which is embedded in a native container. A common example of such a hybrid app would be an Apache Cordova application.

The process for testing a hybrid app on iOS is the same as the process for testing a mobile native application. For additional information, see [Testing Native Mobile Applications on a Physical iOS Device](#) or [Testing Native Mobile Applications on an iOS Simulator](#).

Before testing a hybrid app on an iOS device, ensure that the **Web Inspector** is activated on the device.

## Preparing an iOS Device for Testing



**Note:** To test native mobile applications or hybrid applications with Silk4NET, you require a native mobile license. For additional information, see [Licensing Information](#).

To prepare the iOS device to test mobile applications:

1. Start Xcode on the Mac.
2. Connect the iOS device to the Mac.
3. On the iOS device, click **Settings > Developer**.



**Tip:** If the Developer menu is not displayed on the iOS device, restart the device and the Mac.

4. Activate **Enable UI Automation**.
5. To test a mobile web application on Apple Safari, click **Settings > Safari > Advanced**.
6. Activate the **Web Inspector**.

## Preparing an iOS App for Testing

To be able to test a specific iOS app on a specific iOS device with Silk4NET, consider the following:

- Test automation is only possible with iOS apps that can be installed manually on specific iOS devices. To be able to sign an iOS app, you require a membership in the *Apple Developer Program*. For additional information, see [Choosing a Membership](#).



**Note:** You cannot automatically test iOS apps that are created for publication in the App Store, as well as apps that can be installed manually on any iOS device.

- Before you can install and execute an iOS app on a specific iOS device, you have to register the iOS device with your Apple Developer account.
- You have to use Xcode to create an IPA file of the iOS app, which you can then install on the iOS device. To create IPA files for testing on a specific iOS device, members of the Apple Developer Program can use the *Archive* mechanism of Xcode, by using one of the following two options:
  - If you are a member of the *Apple Developer Enterprise Program*, you can use the **Save for Ad Hoc Deployment** option.
  - If you are a member of the Apple Developer Program, but not of the Apple Developer Enterprise Program, you can use the **Save for Development Deployment** option.

For additional information, see [Exporting Your App for Testing \(iOS, tvOS, watchOS\)](#).

To be able to test a specific iOS app on an iOS Simulator with Silk4NET, use Xcode to create a ZIP file of the iOS app, which you can then install on the iOS Simulator. For additional information, refer to the Xcode documentation.

## Installing the Silk Test Information Service on a Mac



**Note:** To install the information service on a Mac, you require administrative privileges on the Mac.

To create and execute tests against Apple Safari on a Mac, or against mobile applications on an iOS or Android device that is connected to a Mac, install the Silk Test information service (information service) on the Mac, and then use the **Remote Locations** dialog box to connect a Windows machine, on which Silk4NET is installed, to the Mac.

To install the information service on a Mac:

1. Ensure that a Java JDK is installed on the Mac.
2. If you want to test mobile applications on an iOS device, ensure that Xcode is installed on the Mac.
3. Access the information service setup file, `SilkTestInformationService<Version>-<Build Number>.pkg`.
  - If you have downloaded the information service setup file while installing Silk Test, open the folder `macOS` in the Silk Test installation directory, for example `C:\Program Files (x86)\Silk\SilkTest`.
  - If you have not downloaded the information service setup file while installing Silk Test, you can download the setup file from [Micro Focus SupportLine](#).
4. Copy the file `SilkTestInformationService<Version>-<Build Number>.pkg` to the Mac.
5. Execute `SilkTestInformationService<Version>-<Build Number>.pkg` to install the information service.
6. Follow the instructions in the installation wizard.
7. When asked for the password, provide the password of the currently signed in Mac user.
8. When Apple Safari opens and a message box asks whether to trust the SafariDriver, click **Trust**.

To complete the installation, the installer logs the current Mac user out. To verify that the information service was installed correctly, log in to the Mac and click on the Silk Test icon in the top-right corner of the screen to see the available devices and browsers.



**Tip:** If the Silk Test icon does not appear, restart the Mac.

## Uninstalling the Silk Test Information Service from a Mac

To uninstall the Silk Test information service (information service) from a Mac, for example if you no longer want to execute tests against Apple Safari on the Mac:

1. Create a new shell file, for example `uninstallInfoService.sh`.
2. Type the following code into the new file:

```
#!/bin/sh

if launchctl list | grep com.borland.infoservice ; then
    launchctl unload /Library/LaunchAgents/com.borland.infoservice.plist
    echo "unloading Launch Daemon"
fi

if [ -d "/Applications/Silk" ]
then
    sudo rm -rf /Applications/Silk
fi

if [ -f "/Library/LaunchAgents/com.borland.infoservice.plist" ]
then
    sudo rm /Library/LaunchAgents/com.borland.infoservice.plist
fi

if [ -f "/usr/local/bin/ideviceinstaller" ]
then
    sudo rm /usr/local/bin/ideviceinstaller
fi

exit 0
```

3. In the command line, type `chmod +x uninstallInfoService.sh` to make the shell file executable.
4. Execute the shell file from the command line.

## Recommended Settings for iOS Devices

To optimize testing with Silk4NET, configure the following settings on the iOS device that you want to test:

- To make the testing reflect the actions an actual user would perform, disable AutoFill and remembering passwords for Apple Safari. Tap **Settings > Safari > Passwords & AutoFill** and turn off the **Names and Passwords** setting.
- The iOS device must not fall into sleep mode during testing. To turn the screen lock and password off, select **Settings > General > Passcode Lock**.

## Testing Multiple iOS Devices or Simulators on the Same Mac

By default, Silk Test does not support testing multiple iOS devices or iOS Simulators that are connected to the same Mac. At any given time, any given user can only test on one iOS device or one iOS Simulator that is connected to the Mac. However, you can create multiple user sessions on a Mac to test multiple iOS devices that are connected to the Mac and multiple iOS Simulators that are running on the Mac in parallel.

1. For each iOS device or iOS Simulator, create a user with administrator privileges on the Mac. For example, to test on two iOS devices that are connected to the Mac and two iOS Simulators that are running on the Mac, you require four user sessions on the Mac with administrative privileges.
2. For each user, install the Silk Test information service (information service). For information on installing the information service, see [Installing the Silk Test Infoservice on a Mac](#).
3. For each user, navigate to the directory `.silk/silktest/conf/` and rename the file `infoservice.properties.sample` to `infoservice.properties`.
4. For each user, edit the `infoservice.properties` file to specify a port that is not in use. The default port is 22901. Typically, you could increment the default port number by one for each user. For example, if you want to use four user sessions, use the ports 22901, 22902, 22903, and 22904.
5. For each user, logout and login again with the same user to activate the information service with the specified port.



**Tip:** To use the information service that corresponds to a user session, ensure that the user is logged on to the Mac, for example after a reboot of the Mac.

## Testing an Installed App

To test a native mobile app that is already installed on a device, an Emulator, or a Simulator, specify the app in the connection string.

1. Open an existing project that tests a native mobile app.
2. Open the **Edit Application Configuration** dialog box.
3. Replace the existing app in the connection string with one of the following:
  - If you want to test an iOS app, replace the app with the *bundleId*, for example replace `app=MyApp.ipa` with `bundleId=silktest.InsuranceMobile`.
  - If you want to test an Android app, replace the app with the *appActivity* and the *appPackage*. For example, replace `app=MyApp.apk` with `appActivity=.LoginActivity;appPackage=silktest.insurancemobile`.

For additional information, see [Connection String](#).

## Recording Mobile Applications

Once you have established the connection between Silk4NET and a mobile device or an emulator, you can record the actions that are performed on the device. To record mobile applications, Silk4NET uses a **Recording** window that provides the following functionality:

- Displays the screen of the mobile device or Android emulator which you are testing.
- When you perform an action in the **Recording** window, the same action is performed on the mobile device.
- When you interact with a control on the screen, the **Recording** window preselects the default action.
  - If the default action is a `Click`, and you left-click on the control, the action is executed. You can perform a right-click to show a list of the available actions against the control. You can then select the action that you want to perform and click **OK**.
  - If the default action is not a `Click`, a list of all the available actions against the control displays, and you can select the action that you want to perform or simply accept the preselected action by clicking **OK**.

When you have selected an action from the list, you can type values for the parameters of the selected action into the parameter fields. Silk4NET automatically validates the parameters.

- When you pause the recording, you can perform actions in the screen which are not recorded to bring the device into a state from which you want to continue recording.
- When you stop recording, a script is generated with your recorded actions, and you can proceed with replaying the test.

## Selecting the Mobile Device for Test Replay

You can define the mobile device that is used for the replay of a test in the following ways:

- If you execute a test from the UI of Silk4NET and the **Select Mobile Device** dialog box displays, the mobile device, Android Emulator, or iOS Simulator that is selected in the dialog box is used, and Silk4NET ignores which mobile device is set in the test script.
- If the **Select Mobile Device** dialog box is disabled, because the **Don't show again** check box is checked, the application configurations in the individual test scripts determine the mobile device that is used to execute the tests.



**Note:** To re-enable the **Select Mobile Device** dialog box, click **Silk4NET > Edit Application Configurations** and check the **Show 'Select Mobile Device' dialog before record and playback** check box

- If you execute a script from the command line or from a Continuous Integration (CI) server, specify the connection string in the application configuration of the script.

To overwrite the mobile device that is specified in the application configuration, use the `silktest.configurationName` environment variable.

- If you execute a test from Silk Central, specify the mobile device in the **Mobile Device Selection** area of the **Deployment** tab of the execution definition in Silk Central instead of specifying a connection string. For additional information, refer to the [Silk Central Help](#).

You can use the connection string to specify a specific mobile device, or you can filter a subset of the available devices, for example if you have a device pool. The first matching device is used for replay. If not specified otherwise, mobile devices are matched by using the following rules, with declining priority:

- Matching mobile devices connected to the local machine are preferred over mobile devices connected to remote locations.
- If the browser type is specified in the connection string, newer browser versions are preferred over older versions.
- Newer platforms are preferred over older platforms.
- A physical device is preferred to an Emulator or Simulator.
- A device with a device name that is alphabetically later is preferred. For example, a device named "iphone 6" is preferred to a device named "iphone 5".

**Example: Connection string for an app on an Android device that is connected to a remote machine**

To test the app `MyApp.apk` on an Android device that is connected to a remote machine, the connection string would look like the following:

```
"platformName=Android;deviceName=MotoG3;host=http://10.0.0.1;app=MyApp.apk"
```

**Example: Connection string for an app on an iOS Simulator on a Mac**

```
"platformName=iOS;platformVersion=9.2;deviceName=iPhone6;host=10.0.0.1;app=MyApp.ipa;isSimulator=true"
```

## Connection String for a Mobile Device

The *connection string* specifies which mobile device is used for testing. When performing mobile testing, Silk4NET uses the connection string to connect to the mobile device. The connection string is typically part of the application configuration. You can set the connection string when you configure your application under test. To change the connection string, you can use the **Edit Application Configuration** dialog box.



**Note:** If you execute a test from Silk Central, specify the mobile device in the **Mobile Device Selection** area of the **Deployment** tab of the execution definition in Silk Central instead of specifying a connection string. For additional information, refer to the [Silk Central Help](#).

You can use the connection string to specify a specific mobile device, or you can filter a subset of the available devices, for example if you have a device pool. The first matching device is used for replay. If not specified otherwise, mobile devices are matched by using the following rules, with declining priority:

- Matching mobile devices connected to the local machine are preferred over mobile devices connected to remote locations.
- If the browser type is specified in the connection string, newer browser versions are preferred over older versions.

- Newer platforms are preferred over older platforms.
- A physical device is preferred to an Emulator or Simulator.
- A device with a device name that is alphabetically later is preferred. For example, a device named "iphone 6" is preferred to a device named "iphone 5".

The following components are available for the connection string:

Component	Description
deviceName	The name of the mobile device. When testing on a physical mobile device, the device ID can be used instead. Supports wildcards. Case-insensitive.
platformName	Android or iOS. Required.
deviceId	<i>Optional:</i> The ID of the mobile device. Can be used instead of the device name, when testing on a physical mobile device. Supports wildcards. Case-insensitive.
platformVersion	<i>Optional:</i> The Android or iOS version. Specify the version to test only on mobile devices that have a specific Android or iOS version. Supports wildcards. Case-insensitive.
browserVersion	<i>Optional:</i> Can be used in combination with the browser type to test only on the specified browser version. Supports wildcards. Case-insensitive.
host	<i>Optional:</i> If not set, any specified remote location can be used as the host. Supports wildcards. Case-insensitive.
<ul style="list-style-type: none"> <li>• app</li> <li>• appActivity</li> <li>• appPackage</li> </ul>	Required for testing native mobile applications on Android. Either the full path to the app, or a combination of <i>appActivity</i> and <i>appPackage</i> . For example <code>app=MyApp.apk</code> or <code>appActivity=.LoginActivity;appPackage=silktest.insurancemobile</code>
<ul style="list-style-type: none"> <li>• app</li> <li>• bundleId</li> </ul>	Required for testing native mobile applications on iOS. Either the full path to the app or the <i>bundleId</i> . For example <code>app=MyApp.ipa</code> or <code>bundleId=silktest.InsuranceMobile</code>
noReset	<i>Optional:</i> Can be set when testing native mobile applications. Is only valid if the <i>app</i> is specified. True if the app should not be reinstalled before testing. False if the app should be reinstalled before testing. The default value is False.
isSimulator	<i>Optional:</i> Used to specify that the test should only be executed on an iOS Simulator. The device name can be used instead.
isPhysicalDevice	<i>Optional:</i> Used to specify that the test should only be executed on a physical device. The device name can be used instead.

When using a pool of devices and to find out which device is actually used for testing, you can use the return value of the `GenerateConnectionString` method of `MobileDevice` class.

### Testing a mobile web application on a mobile device or on an Android Emulator

When testing a mobile web application on a mobile device or on an Android Emulator, the connection string consists of the following parts:

1. The mobile device name, for example MotoG3, or the device ID, for example 11111111.



**Note:** If the device name is unique, Micro Focus recommends to use the device name in the connection string, because the device ID is less readable.

2. The platform name.
3. The browser version. This can only be used in combination with setting the browser type
4. The IP address or the host name of a specific remote machine, for example 10.0.0.1. You can also use the name of a remote location that is specified in the **Edit Remote Locations** dialog box as the host name, for example *MyRemoteLocation*. When using the remote location name, you can also use wildcards. To test an Android device that is connected to the local machine, specify the IP address or the host name of the local machine.

#### Example: Connection string for any available Android device

```
"platformName=Android"
```

#### Example: Connection string for a browser on an Android device that is connected to the local machine

To test a mobile browser on an Android device that is connected to the local machine, the connection string should look similar to the following:

```
"deviceName=MotoG3;platformName=Android;host=localhost"
```

or

```
"platformName=Android;deviceId=11111111;host=localhost"
```

#### Example: Connection string for a browser on an Android device that is connected to a remote machine

To test a mobile browser on a remote Android device, the connection string should look similar to the following:

```
"deviceName=MotoG3;platformName=Android;host=10.0.0.1"
```

```
"deviceName=MotoG3;platformName=Android;host=MyRemoteLocation*"
```

#### Example: Connection string for a browser on an iOS device that is connected to a Mac

To test a mobile browser on a remote iOS device, the connection string would look like the following:

```
"deviceName=myiPhone6;platformName=iOS;host=10.0.0.1"
```

### Testing a native mobile application on a mobile device or on an Android Emulator

When testing a native mobile application on a mobile device or on an Android Emulator, the connection string consists of the following parts:

1. The mobile device name, for example MotoG3, or the device ID, for example 11111111.



**Note:** If the device name is unique, Micro Focus recommends to use the device name in the connection string, because the device ID is less readable.

2. The platform name.
3. The IP address or the host name of a specific remote machine, for example 10.0.0.1. You can also use the name of a remote location that is specified in the **Edit Remote Locations** dialog box as the host name, for example *MyRemoteLocation*. When using the remote location name, you can also use wildcards. To test an Android device that is connected to the local machine, specify the IP address or the host name of the local machine.
4. The name of the file of the app that you want to test, or the URL of the file, if the file is located on a web server. For example `C:/MyApp.apk` or `MyApp.ipa`.
  - Android apps are always `.apk` files.
  - iOS apps on a real device are always `.ipa` files.
  - iOS apps on a Simulator are either a zipped file or a directory with the name *app*.

**Example: Connection string for an app on an Android device that is connected to a remote machine**

To test the app `MyApp.apk` on an Android device that is connected to a remote machine, the connection string would look like the following:

```
"platformName=Android;deviceName=MotoG3;host=http://10.0.0.1;app=MyApp.apk"
```

**Example: Connection string for an app on an iOS device that is connected to a Mac**

To test the app `MyApp.ipa` on an iOS device that is connected to a remote machine, the connection string would look like the following:

```
"platformName=iOS;deviceName=MyiPhone;host=http://10.0.0.1;app=MyApp.ipa"
```

### Testing a mobile web application on an iOS Simulator

When testing a mobile web application on an iOS Simulator, the connection string consists of the following parts:

1. The platform name, which is `iOS`.
2. The platform version, for example `9.2`.
3. The mobile device name, for example `iPhone6`.
4. The IP address or the host name of the Mac, on which the iOS Simulator is running.

**Example: Connection string for a browser on an iOS Simulator on a Mac**

```
"platformName=iOS;platformVersion=9.2;deviceName=iPhone6;host=10.0.0.1;isSimulator=true"
```

### Testing a native mobile application on an iOS Simulator

When testing a native mobile application on an iOS Simulator on a Mac, the connection string consists of the following parts:

1. The platform name, which is `iOS`.
2. The platform version, for example `9.2`.
3. The mobile device name, for example `iPhone6`.
4. The IP address or the host name of the remote machine, for example `10.0.0.1`.
5. The name of the app that you want to test, for example `MyApp.ipa`.

**Example: Connection string for an app on an iOS Simulator on a Mac**

```
"platformName=iOS;platformVersion=9.2;deviceName=iPhone6;host=10.0.0.1;app=MyApp.ipa;isSimulator=true"
```

## Interacting with a Mobile Device

To interact with a mobile device and to perform an action like a swipe in the application under test:

1. In the **Recording** window, click **Show Mobile Device Actions**. All the actions that you can perform against the mobile device are listed.

2. Select the action that you want to perform from the list.
3. To record a swipe on an Android device or emulator, move the mouse while holding down the left mouse button.
4. Continue with the recording of your test.

## Releasing a Mobile Device

When recording or playing back a test against a mobile device, the Open Agent instance takes ownership of the device. By doing so, the Open Agent is preventing other Silk Test users from using the device. To enable other Silk Test users to use the device after you have finished recording or replaying tests on the device, Silk Test automatically releases the device when the Silk Test client is closed, when an unattended test process finishes, or when the Open Agent is closed. You can also manually release the device.



**Note:** Releasing a mobile device will close the application under test (AUT) on the mobile device.

## Releasing a Mobile Device After Recording

Release a mobile device after recording to enable other Silk Test users to test on the device.

To release a mobile device after you have finished recording, perform one of the following actions:

- Stop the Open Agent from the System Tray.
- Close Silk4NET. The device is only released by this action when parallel testing is enabled.



**Note:** Releasing a mobile device will close the application under test (AUT) on the mobile device.

## Releasing a Mobile Device After Replay

Release a mobile device after replay to enable other Silk Test users to test on the device.

To manually release a mobile device after replaying is complete, you can also perform one of the following:

- If you have tested a mobile web application, use the `Close` method or the `CloseSynchron` method of the `BrowserApplication` class. For additional information on these methods, refer to the API documentation.

```
// C# code
webBrowser.Close();
```

```
'VB .NET code
WebBrowser.Close()
```

- If you have tested a mobile native application, use the `CloseApp` method of the `MobileDevice` class.

For example, type the following:

```
// C# code
MobileDevice mobileDevice = _desktop.MobileDevice();
mobileDevice.CloseApp();
```

```
'VB .NET code
Dim mobileDevice = _desktop.MobileDevice()
mobileDevice.CloseApp()
```

- Add the `Agent.DetachAll()` statement to the test script.

A mobile device is automatically released if one of the following conditions is met:

- The Open Agent is closed.
- The test process stops during unattended testing. The device is only released by this action when parallel testing is enabled.
- Silk4NET is closed. The device is only released by this action when parallel testing is enabled.

 **Note:** Releasing a mobile device will close the application under test (AUT) on the mobile device.

## Troubleshooting when Testing Mobile Applications

### Why does the Select Application dialog box not display my mobile browsers?

Silk4NET might not recognize a mobile device or emulator for one of the following reasons:

Reason	Solution
The emulator is not running.	Start the emulator.
The Android Debug Bridge (adb) does not recognize the mobile device.	To check if the mobile device is recognized by adb: <ol style="list-style-type: none"><li>1. Navigate to the Android Debug Bridge (adb) in the Android SDK installation folder. If the Android SDK is not installed, navigate to <code>C:\Program Files (x86)\Silk\SilkTest\ng\agent\plugins\com.microfocus.silktest.adb_17.5.0.&lt;build number&gt;\bin</code> to use the adb that is installed with Silk4NET.</li><li>2. Hold <b>Shift</b> and right-click into the <b>File Explorer</b> window.</li><li>3. Select <b>Open command window here</b>.</li><li>4. In the command window, type <code>adb devices</code> to get a list of all attached devices.</li><li>5. If your device is not listed, check if USB-debugging is enabled on the device and if the appropriate USB driver is installed.</li><li>6. If you get the error <code>adb server is out of date</code>, an additional adb server might be running. For additional information, see <i>What can I do if the connection between the Open Agent and my device is unstable?</i></li></ol>
The version of the operating system of the device is not supported by Silk4NET.	For information on the supported mobile operating system versions, refer to the <a href="#">Release Notes</a> .
The USB driver for the device is not installed on the local machine.	Install the USB driver for the device on the local machine. For additional information, see <i>Installing a USB Driver</i> .
USB-debugging is not enabled on the device.	Enable USB-debugging on the device. For additional information, see <i>Enabling USB-Debugging</i> .

### Why does Silk4NET search for a URL in Chrome for Android instead of navigating to the URL?

Chrome for Android might in some cases interpret typing an URL into the address bar as a search. As a workaround you can manually add a command to your script to navigate to the URL.

### What do I do if the adb server does not start correctly?

When the Android Debug Bridge (adb) server starts, it binds to local TCP port 5037 and listens for commands sent from adb clients. All adb clients use port 5037 to communicate with the adb server. The adb server locates emulator and device instances by scanning odd-numbered ports in the range 5555 to 5585, which is the range used by emulators and devices. Adb does not allow changing those ports. If you encounter a problem while starting adb, check if one of the ports in this range is already in use by another program.

For additional information, see <http://developer.android.com/tools/help/adb.html>.

### What can I do if the connection between the Open Agent and my device is unstable?

If you have installed the Android SDK or another tool that uses the Android Debug Bridge (adb), an additional adb server might be running in addition to the one that is used by Silk4NET. If the running adb servers have different versions, the connection between the Open Agent and the device might become unstable or even break.

To avoid version mismatch errors, specify the path to the Android SDK directory by setting the environment variable `SILKTEST_ANDROID_HOME`, for example to `C:\Users\\AppData\Local\Android\android-sdk`. If the variable is not set, the adb version that is shipped with Silk4NET is used.

### Why do I get the error: Failed to allocate memory: 8?

This error displays if you are trying to start up the emulator and the system cannot allocate enough memory. You can try the following:

1. Lower the RAM size in the memory options of the emulator.
2. Lower the RAM size of Intel HAXM. To lower the RAM size, run the `IntelHaxm.exe` again and choose **change**.
3. Open the **Task Manager** and check if there is enough free memory available. If not, try to free up additional memory by closing a few programs.

### Why do I get the error "Silk Test cannot start the app that you have specified" during testing on an iOS device?

This error might display for one or more of the following reasons:

Reason	Solution
The iOS device is not in developer mode.	You can enable the developer mode in one of the following two ways: <ul style="list-style-type: none"><li>• Connect the device to a Mac on which Xcode is installed, and start the app that you want to test on the device.</li><li>• Add your provisioning profiles to the device.<ol style="list-style-type: none"><li>1. Open Xcode.</li><li>2. Select <b>Window &gt; Devices</b>.</li><li>3. Right-click on the iOS device.</li><li>4. Select <b>Show Provisioning Profiles</b>.</li><li>5. Add your provisioning profiles.</li></ol></li></ul>
You have recently updated the iOS version of the device.	<ol style="list-style-type: none"><li>1. Open Xcode.</li><li>2. Select <b>Window &gt; Devices</b>.</li><li>3. Wait until Xcode has processed the symbol files.</li></ol>
UI automation is not enabled on the iOS device.	<ol style="list-style-type: none"><li>1. Select <b>Settings &gt; Developer</b>.</li><li>2. Activate <b>Enable UI Automation</b>.</li></ol>
The <b>Web Inspector</b> is not activated on the iOS device, while you are trying to test a mobile web application.	<ol style="list-style-type: none"><li>1. Click <b>Settings &gt; Safari &gt; Advanced</b>.</li><li>2. Activate the <b>Web Inspector</b>.</li></ol>
The app that you want to test was not built for the iOS version of the iOS device on which you are testing.	Use Xcode to build the app for the iOS version of the device.

Reason	Solution
The <b>Software Update</b> dialog box is currently open on the iOS device.	<p>Close the dialog box and disable automatic software updates:</p> <ol style="list-style-type: none"> <li>1. Select <b>Settings &gt; App and iTunes Stores &gt; AUTOMATIC DOWNLOADS.</b></li> <li>2. Deactivate <b>Updates.</b></li> </ol>

### Why does my Android device display only the Back button in the dynamic hardware controls?

If the Android or the Android Emulator is screen-locked when you start testing, the device or Emulator might display only the button **Back** in the dynamic hardware controls.

To solve this issue, stop the Open Agent, restart the device, and change the device settings to no longer lock the screen.

### Why does my Android device or emulator no longer display a keyboard?

To support unicode characters, Silk4NET replaces the standard keyboard with a custom keyboard. When testing is finished, the original keyboard is restored. If an error occurs during testing, the custom keyboard might still be active and cannot be replaced.

To solve this issue, manually reset the keyboard under **Settings > Language & input > Current Keyboard.**

### Why does my device not respond during testing?

If the device, emulator, or Simulator is screen-locked when you start testing, and Silk4NET is unable to unlock the screen, the device, emulator, or Simulator might stop responding to any actions.

To solve this issue, stop the Open Agent and change the device settings to no longer lock the screen.

### Why can I not install the Information Service on a Mac?

When the **Allow apps downloaded from** setting in the **General** tab of the **Security & Privacy** system preferences pane is set to **Mac App Store and identified developers**, which is the default value, the following error message appears when opening the Information Service setup:  
 "SilkTestInformationService<version>.pkg" can't be opened because it is from an unidentified developer.

To solve this issue, use one of the following:

- Right-click the setup file and select **Open**. A warning message will appear, but you will still be able to open the file.
- Set the **Allow apps downloaded from** setting to **Anywhere**.
- After attempting to open the file, navigate to the **General** tab of the **Security & Privacy** system preferences pane and click **Open Anyway**.

### Why is the Recording window black when recording an Android app?

Android apps that require a higher level of security, for example apps that handle financial transactions, might have the **FLAG\_SECURE** flag set, which prevents Silk4NET from capturing the app. Silk4NET relies on screenshots or on a video of the Android device during recording and will display a black screen of the device in the **Recording** window, if the Android app that you are testing has this flag set. To test such an app with Silk Test, you have to contact the app development team, and ask them to un-set the **FLAG\_SECURE** flag during testing.

## Why does Silk4NET not show a video when testing on an Android emulator?

If the emulator is using the graphic card of your computer for better rendering, the video capturing of Silk4NET might not work. To solve this, emulate the graphics in software:

1. Open the **Android Virtual Device Manager**.
2. Click **Edit** in the **Actions** column of the emulator.
3. Select **Software** from the list in the **Emulated Performance** area of the **Virtual Device Configuration** dialog.

## How can I change the installed version of Xcode?

If the version of Xcode that you are using is not supported by Silk4NET, for example when you upgrade to the latest version of Xcode, an error message might appear when testing on iOS.

To replace the installed version of Xcode with a supported version, download a supported Xcode version from <https://developer.apple.com/download/more/>, and replace the unsupported version with the downloaded version. For information about the supported Xcode versions, refer to the [Release Notes](#).

## What can I do if my Mac runs out of disk space?

Silk4NET uses Instruments to automate iOS devices. This tool creates large log files in the `/Library/Caches/com.apple.dt.instruments` directory, which might fill up disk space on the Mac. To solve this issue, Micro Focus recommends regularly deleting these log files, either manually or by using a cronjob. For example, to delete the files each day at the same time, you could do the following:

1. Type `sudo crontab -e` into a Terminal. This opens an editor in which you can edit the crontab for root.
2. Add the following line to the crontab:

```
0 2 1 * * find /Library/Caches/com.apple.dt.instruments -mtime +10 -delete
```

3. Save the crontab.

In this example, all log files that are older than ten days will be deleted each day at 2 AM from the directory.

## How Can I Use Chrome for Android to Replay Tests?

By default you can use the **Select Browser** dialog box to select the browser during replay.

If you execute a script from the command line or from a Continuous Integration (CI) server, you can specify the connection string in the application configuration of the script. To overwrite the browser that is specified in the application configuration, use the `silktest.configurationName` environment variable.

You can also use the property `browsertype` of the `BrowserApplication` class to set the type of the browser that is used during replay. However, the `browsertype` does not include an explicit value for Chrome for Android.

To specify that you want to use Chrome for Android as the browser, on which a test is replayed, set the `browsertype` to `GoogleChrome` and specify `Android` as the platform. When `Android` is specified, Silk4NET uses Chrome for Android instead of Google Chrome on a desktop machine to execute the test.

### Examples

The following code sample shows how you can set the base state for a test to use Chrome for Android on a Nexus 7 by using the `silktest.configurationName`:

```
SET
silktest.configurationName="platformName=Android;deviceName=Nexus
7;host=10.0.0.1 - Chrome"
```

The following code sample shows how you can set the base state for a test to use Chrome for Android by using the `browsertype` :

```
// C# code
var baseState = New BrowserBaseState(BrowserType.GoogleChrome,
```

```

"demo.borland.com/InsuranceWebExtJS/" );
baseState.SetConnectionString( "platformName=Android" );
baseState.Execute();

'VB .NET code
Dim baseState = New BrowserBaseState(BrowserType.GoogleChrome,
"demo.borland.com/InsuranceWebExtJS/" )
baseState.SetConnectionString( "platformName=Android" )
baseState.Execute()

```

## Limitations for Testing Mobile Web Applications

The support for playing back tests and recording locators on mobile browsers is not as complete as the support for the other supported browsers. The following list lists the known limitations for playing back tests and recording locators on mobile browsers:

- The following classes, interfaces, methods, and properties are currently not supported for mobile web applications:
  - `BrowserApplication` class.
    - `CloseOtherTabs` method
    - `CloseTab` method
    - `ExistsTab` method
    - `GetActiveTab` method
    - `GetSelectedTab` method
    - `GetSelectedTabIndex` method
    - `GetSelectedTabName` method
    - `GetTabCount` method
    - `ImageClick` method
    - `OpenTab` method
    - `SelectTab` method
  - `DomElement` class.
    - `DomDoubleClick` method
    - `DomMouseMove` method
    - `GetDomAttributeList` method
  - `IKeyable` interface.
    - `PressKeys` method
    - `ReleaseKeys` method
- Silk4NET does not support testing HTML frames and iFrames with Apple Safari on iOS.
- Recording in landscape mode is not supported for emulators that include virtual buttons in the system bar. Such emulators do not correctly detect rotation and render the system bar in landscape mode to the right of the screen, instead of the lower part of the screen. However, you can record against such an emulator in portrait mode.
- Only HTML attributes in the HTML DOM are supported in XPath expressions for mobile applications. Silk4NET does not support properties in XPath expressions.
- If you are testing a mobile application against Chrome for Android, Silk4NET does not support zooming.
- The following JavaScript alert-handling methods of the `BrowserWindow` class do not work when testing on the Original Android Stock (AOSP) Browser:
  - `AcceptAlert` method
  - `DismissAlert` method

- `GetAlertText` method
- `IsAlertPresent` method
- At any given point in time, each user on a Mac can only test on one iOS device that is connected to the Mac or on one iOS Simulator that is running on the Mac. To test on multiple iOS Simulators on the same Mac, a user session on the Mac is required for each Simulator. For additional information, see [Testing Multiple iOS Simulators on the Same Mac](#).
- Before starting to test a mobile web application, ensure that no browser tab is open.
- While testing a mobile web application, you can only have one browser tab open.
- Silk4NET does not support testing mobile web applications that are opened by a native mobile application.

## Limitations for Testing Native Mobile Applications

The known limitations for playing back tests and recording locators on native mobile applications (apps) are:

- The following classes, interfaces, methods, and properties are currently not supported for native mobile applications:
  - `IKeyable` interface.
    - `PressKeys` method
    - `ReleaseKeys` method
  - `MobileDevice` class.
    - When testing a native mobile application on iOS, the `SetLocation` method is only supported for iOS simulators, not for physical iOS devices.
    - When testing a native mobile application on an Android version prior to Android 6.0, you have to enable **Allow mock locations** to use the `SetLocation` method. To do so, open the settings of the Android device or emulator and tap **Developer Options**.
    - When testing a native mobile application on Android 6.0 or later, you have to set the app to **Appium Settings** to use the `SetLocation` method. To do so, open the settings of the Android device or emulator and tap **Developer Options > Select mock location app**. Then choose **Appium Settings**.
-  **Note:** The **Appium Settings** entry is only available if you have already executed a test with Appium on the Android device or emulator.
- Recording in landscape mode is not supported for emulators that include virtual buttons in the system bar. Such emulators do not correctly detect rotation and render the system bar in landscape mode to the right of the screen, instead of the lower part of the screen. However, you can record against such an emulator in portrait mode.
- Only HTML attributes in the HTML DOM are supported in XPath expressions for mobile applications. Silk4NET does not support properties in XPath expressions.
- At any given point in time, each user on a Mac can only test on one iOS device that is connected to the Mac or on one iOS Simulator that is running on the Mac. To test on multiple iOS devices or iOS Simulators on the same Mac, a user session on the Mac is required for each device and Simulator. For additional information, see [Testing Multiple iOS Simulators on the Same Mac](#).
- Silk4NET does not support text recognition when testing native mobile applications on both Android and iOS.

Text recognition includes the following methods:

- `TextCapture`
- `TextClick`
- `TextExists`
- `TextRectangle`

- Silk4NET does not support testing native mobile applications with multiple web views.

## Clicking on Objects in a Mobile Website

When clicking on an object during the recording and replay of an automated test, a mobile website presents the following challenges in comparison to a desktop website:

- Varying zoom factors and device pixel ratios.
- Varying screen sizes for different mobile devices.
- Varying font and graphic sizes between mobile devices, usually smaller in comparison to a website in a desktop browser.
- Varying pixel size and resolution for different mobile devices.

Silk4NET enables you to surpass these challenges and to click the appropriate object on a mobile website.

When recording a test on a mobile device, Silk4NET does not record coordinates when recording a `Click`. However, for cross-browser testing, coordinates are allowed during replay. You can also manually add coordinates to a `Click`. Silk4NET interprets these coordinates as the HTML coordinates of the object. To click on the appropriate object inside the `BrowserWindow`, during the replay of a test on a mobile device, Silk4NET applies the current zoom factor to the HTML coordinates of the object. The device pixel coordinates are the HTML coordinates of the object, multiplied with the current zoom factor.

If the object is not visible in the currently displayed section of the mobile website, Silk4NET scrolls to the appropriate location in the website.

### Example

The following code shows how you can test a `DomButton` with a fixed size of 100 x 20 px in your HTML page.

C#

```
DomButton domButton = _desktop.Find<DomButton>("locator for the button");
domButton.Click(MouseButton.LEFT, new Point(50, 10));
```

VB

```
DomButton domButton = _desktop.Find(Of DomButton)("locator for the button");
domButton.Click(MouseButton.LEFT, new Point(50, 10));
```

During replay on a different mobile device or with a different zoom factor, the `DomButton` might for example have an actual width of 10px on the device screen. Silk4NET clicks in the middle of the element when using the code above, independent of the current zoom factor, because Silk4NET interprets the coordinates as HTML coordinates and applies the current zoom factor.

## Using Existing Mobile Web Tests

Silk Test 17.0 or later uses a different approach to mobile web testing than previous versions of Silk Test. This change might result in your old mobile web tests no longer working on Silk Test 17.0 or later. This topic describes some of the changes that were introduced with Silk Test 17.0 and provides guidance on changing existing mobile web tests with Silk Test 17.0 or later.

The following changes for mobile web testing were introduced with Silk Test 17.0:

- With previous versions of Silk Test, you were able to test on iOS devices that were connected by USB to a Windows machine. With Silk Test 17.0 or later, you can only test on iOS devices that are connected to an OSX machine (Mac).

- If you have tested mobile web applications on an Android device with a previous version of Silk Test, you have to manually remove the proxy from the Android device to test a web application with Silk Test 17.0 or later. Silk Test 17.0 or later no longer requires a proxy, and if the proxy is set, the message `Unable to connect to the proxy server` displays on the device.

## .NET Support

Silk Test provides built-in support for testing .NET applications including:

- Windows Forms (Win Forms) applications
- Windows Presentation Foundation (WPF) applications
- Microsoft Silverlight applications

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

## Windows Forms Support

Silk4NET provides built-in support for testing .NET standalone and No-Touch Windows Forms (Win Forms) applications. However, side-by-side execution is supported only on standalone applications.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

### Object Recognition

The name that was given to an element in the application is used as `automationId` attribute for the locator if available. As a result, most objects can be uniquely identified using only this attribute.

### Supported Controls

For a complete list of the record and replay controls available for Win Forms testing, see *Windows Forms Class Reference*.

## Windows Forms Class Reference

When you configure a Windows Forms application, Silk4NET automatically provides built-in support for testing standard Windows Forms controls.

## Attributes for Windows Forms Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Windows Forms applications include:

- `automationid`
- `caption`
- `windowid`
- `priorlabel` (For controls that do not have a caption, the `priorlabel` is used as the caption automatically. For controls with a caption, it may be easier to use the caption.)



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards `?` and `*`.

## Custom Attributes for Windows Forms Applications

Windows Forms applications use the predefined automation property `automationId` to specify a stable identifier for the Windows forms control.

Silk4NET automatically will use this property for identification in the locator. Windows Forms application locators look like the following:

```
/FormsWindow//PushButton[@automationId='btnBasicControls']
```

## Dynamically Invoking Windows Forms Methods

Dynamic invoke enables you to directly call methods, retrieve properties, or set properties, on an actual instance of a control in the application under test. You can also call methods and properties that are not available in the Silk4NET API for this control. Dynamic invoke is especially useful when you are working with custom controls, where the required functionality for interacting with the control is not exposed through the Silk4NET API.

Call dynamic methods on objects with the `Invoke` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Call multiple dynamic methods on objects with the `InvokeMethods` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Retrieve dynamic properties with the `GetProperty` method and set dynamic properties with the `SetProperty` method. To retrieve a list of supported dynamic properties for a control, use the `GetPropertyList` method.

For example, to call a method named `SetTitle`, which requires the title to be set as an input parameter of type string, on an actual instance of a control in the application under test, type the following:

```
control.Invoke("SetTitle", "my new title")
```



**Note:** Typically, most properties are read-only and cannot be set.



**Note:** Reflection is used in most technology domains to call methods and retrieve properties.

### The Invoke Method

For a Windows Forms or a WPF control, you can use the `Invoke` method to call the following methods:

- Public methods that the MSDN defines for the control.
- Public static methods that the MSDN defines.
- User-defined public static methods of any type.

#### First Example for the Invoke Method

For an object of the Silk4NET type `DataGrid`, you can call all methods that MSDN defines for the type `System.Windows.Forms.DataGrid`.

To call the method `IsExpanded` of the `System.Windows.Forms.DataGrid` class, use the following code:

```
//VB .NET code
Dim isExpanded As Boolean = dataGrid.Invoke("IsExpanded", 3)

//C# code
bool isExpanded = (bool) dataGrid.Invoke("IsExpanded", 3);
```

### Second Example for the Invoke Method

To invoke the static method `String.Compare(String s1, String s2)` inside the AUT, use the following code:

```
//VB .NET code
```

```
Dim result as Integer = (Integer)  
mainWindow.Invoke("System.String.Compare", "a", "b")
```

```
//C# code
```

```
int result = (int) mainWindow.Invoke("System.String.Compare",  
"a", "b");
```

### Third Example for the Invoke Method

This example shows how you can dynamically invoke the user-generated method `GetContents`.

You can write code which you can use to interact with a control in the application under test (AUT), in this example an `UltraGrid`. Instead of creating complex dynamic invoke calls to retrieve the contents of the `UltraGrid`, you can generate a new method `GetContents` and then just dynamically invoke the new method.

In Visual Studio, the following code in the AUT defines the `GetContents` method as a method of the `UltraGridUtil` class:

```
//C# code, because this is code in the AUT  
namespace UltraGridExtensions {  
    public class UltraGridUtil {  
        /// <summary>  
        /// Retrieves the contents of an UltraGrid as nested list  
        /// </summary>  
        /// <param name="grid"></param>  
        /// <returns></returns>  
        public static List<List<string>>  
GetContents(Infragistics.Win.UltraWinGrid.UltraGrid grid) {  
            var result = new List<List<string>>();  
            foreach (var row in grid.Rows) {  
                var rowContent = new List<string>();  
                foreach (var cell in row.Cells) {  
                    rowContent.Add(cell.Text);  
                }  
                result.Add(rowContent);  
            }  
            return result;  
        }  
    }  
}
```

The code for the `UltraGridUtil` class needs to be added to the AUT. You can do this in the following ways:

- The application developer can compile the code for the class into the AUT. The assembly needs to be already loaded.
- You can create a new assembly that is loaded into the AUT during test execution.

To load the assembly, you can use the following code:

```
FormsWindow.LoadAssembly(String assemblyFileName)
```

You can load the assembly by using the full path, for example:

```
mainWindow.LoadAssembly("C:/temp/ultraGridExtensions.dll")
```

You can also find the location of the assembly by using the `Location` method:

```
//VB.NET code
Dim assemblyLocation =
GetType(UltraGridExtensions.UltraGridUtil).Assembly.Location
mainWindow.LoadAssembly(assemblyLocation)
```

```
//C# code
string assemblyLocation =
typeof(UltraGridExtensions.UltraGridUtil).Assembly.Location;
mainWindow.LoadAssembly(assemblyLocation);
```

When the code for the `UltraGridUtil` class is in the AUT, you can add the following code to your test script to invoke the `GetContents` method:

```
var contents = (IList)
mainWindow.Invoke("UltraGridExtensions.UltraGridUtil.GetContents
", ultraGrid);
```

The `mainWindow` object, on which the `Invoke` method is called, only identifies the AUT and can be replaced by any other object in the AUT.

### The InvokeMethods Method

For a Windows Forms or a WPF control, you can use the `InvokeMethods` method to invoke a sequence of nested methods. You can call the following methods:

- Public methods that the MSDN defines for the control.
- Public static methods that the MSDN defines.
- User-defined public static methods of any type.

#### Example: Getting the Text Contents of a Cell in a Custom Data Grid

To get the text contents of a cell of a custom data grid from the Infragistics library, you can use the following C# code in the AUT:

```
string cellText =
dataGrid.Rows[rowIndex].Cells[columnIndex].Text;
```

The following C# code sample gets the text contents of the third cell in the first row:

```
string cellText = dataGrid.Rows[0].Cells[2];
```

Scripting the same example by using the `InvokeMethods` method generates a relatively complex script, because you have to pass five methods with their corresponding parameters to the `InvokeMethods` method:

```
// C# code
var dataGrid = mainWindow.WPFControl("@automationId='Custom
Data Grid'");
// Get text contents of third cell in first row.
var rowIndex = 0;
var columnIndex = 2;

var methodNames = new List<string>();
methodNames.Add("Rows");
    // Get the list of rows from the grid.
methodNames.Add("get_Item"); //
Get a specific row from the list of rows by using the indexer
method.
methodNames.Add("Cells");
    // Get the list of cells from the the row.
methodNames.Add("get_Item"); //
Get a specific cell from the list of cells by using the indexer
method.
```

```

methodNames.Add("Text");
    // Get the text of the cell.

var parameters = new List<List<object>>();
parameters.Add(new List<object>()); //
Parameters for the Rows property.
parameters.Add(new List<object>() { rowIndex }); //
Parameters for the get_Item method.
parameters.Add(new List<object>()); //
Parameters for the Cells property.
parameters.Add(new List<object>() { columnIndex }); //
Parameters for the get_Item method.
parameters.Add(new List<object>()); //
Parameters for the Text property.

string cellText = (string)dataGrid.InvokeMethods(methodNames,
parameters);

' VB .NET code
Dim dataGrid = mainWindow.WPFControl("@automationId='Custom
Data Grid'")

' Get text contents of third cell in first row.
Dim rowIndex = 0
Dim column = 2

Dim methodNames = New List(Of String)()
methodNames.Add("Rows") ' Get the list of
rows from the grid.
methodNames.Add("get_Item") ' Get a specific row
from the list of rows by using the indexer method.
methodNames.Add("Cells") ' Get the list of
cells from the the row.
methodNames.Add("get_Item") ' Get a specific cell
from the list of cells by using the indexer method.
methodNames.Add("Text") ' Get the text of the
cell.

Dim parameters = New List(Of List(Of Object))()
parameters.Add(New List(Of Object)()) '
Parameters for the Rows property.
parameters.Add(New List(Of Object) From {rowIndex}) '
Parameters for the get_Item method.
parameters.Add(New List(Of Object)()) '
Parameters for the Cells property.
parameters.Add(New List(Of Object) From {columnIndex}) '
Parameters for the get_Item method.
parameters.Add(New List(Of Object)()) '
Parameters for the Text property.

Dim cellText As String = dataGrid.InvokeMethods(methodNames,
parameters)

```

A better approach in such a case is to add code to the application under test and then to use the `InvokeMethods` method. For this example, add the `GetCellText` method to the AUT:

```

// C# code, if the AUT is implemented in C#.
public static string
GetCellText(Infragistics.Win.UltraWinGrid.UltraGrid dataGrid,

```

```
int rowIndex, int columnIndex) {
    return dataGrid.Rows[rowIndex].Cells[columnIndex].Text;
}

' VB code, if the AUT is implemented in VB.
public static string
GetCellText(Infragistics.Win.UltraWinGrid.UltraGrid dataGrid,
int rowIndex, int columnIndex) {
    return dataGrid.Rows[rowIndex].Cells[columnIndex].Text;
}
```

To get the text contents of the cell, dynamically invoke the `GetCellText` method from your test script:

```
// C# code
string cellText = (string) mainWindow.Invoke("GetCellText",
dataGrid, rowIndex, columnIndex);
```

```
'VB .NET code
Dim cellText As String = mainWindow.Invoke("GetCellText",
dataGrid, rowIndex, columnIndex)
```

For additional information, see *Adding Code to the Application Under Test to Test Custom Controls*.

## Supported Methods and Properties

The following methods and properties can be called:

- Methods and properties that Silk4NET supports for the control.
- All public methods and properties that the MSDN defines for the control.
- If the control is a custom control that is derived from a standard control, all methods and properties from the standard control can be called.

## Supported Parameter Types

The following parameter types are supported:

- All built-in Silk4NET types

Silk4NET types includes primitive types (such as boolean, int, string), lists, and other types (such as Point and Rect).

- Enum types

Enum parameters must be passed as string. The string must match the name of an enum value. For example, if the method expects a parameter of the .NET enum type `System.Windows.Visibility` you can use the string values of `Visible`, `Hidden`, or `Collapsed`.

- .NET structs and objects

.NET struct and object parameters must be passed as a list. The elements in the list must match one constructor for the .NET object in the test application. For example, if the method expects a parameter of the .NET type `System.Windows.Vector`, you can pass a list with two integers. This works because the `System.Windows.Vector` type has a constructor with two integer arguments.

- Other controls

Control parameters can be passed or returned as `TestObject`.

## Returned Values

The following values are returned for properties and methods that have a return value:

- The correct value for all built-in Silk4NET types. These types are listed in the *Supported Parameter Types* section.
- All methods that have no return value return `null` in C# or `Nothing` in VB.

# Windows Presentation Foundation (WPF) Support

Silk4NET provides built-in support for testing Windows Presentation Foundation (WPF) applications. Silk4NET supports standalone WPF applications and can record and play back controls embedded in .NET version 3.5 or later.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

## Supported Controls

For a complete list of the controls available for WPF testing, see *WPF Class Reference*.

All supported WPF classes for Silk4NET WPF support start with the prefix *WPF*, such as *WPFWindow* and *WPFListBox*.

Supported methods and properties for WPF controls depend on the actual implementation and runtime state. The methods and properties may differ from the list that is defined for the corresponding class. To determine the methods and properties that are supported in a specific situation, use the following code:

- `GetPropertyList()`
- `GetDynamicMethodList()`

For additional information about WPF, refer to [MSDN](#).

## WPF Class Reference

When you configure a WPF application, Silk4NET automatically provides built-in support for testing standard WPF controls.

## Attributes for Windows Presentation Foundation (WPF) Applications

Supported attributes for WPF applications include:

- *automationId*
- *caption*
- *className*
- *name*
- All dynamic locator attributes.



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards `?` and `*`.

For additional information on dynamic locator attributes, see *Dynamic Locator Attributes*.

## Object Recognition

To identify components within WPF scripts, you can specify the *automationId*, *caption*, *className*, or *name*. The name that is given to an element in the application is used as the *automationId* attribute for the locator if available. As a result, most objects can be uniquely identified using only this attribute. For example, a locator with an *automationId* might look like: `//`

```
WPFButton[@automationId='okButton']".
```

If you define an *automationId* and any other attribute, only the *automationId* is used during replay. If there is no *automationId* defined, the *name* is used to resolve the component. If neither a *name* nor an *automationId* are defined, the *caption* value is used. If no caption is defined, the *className* is used. We recommend using the *automationId* because it is the most useful property.

Attribute Type	Description	Example
automationId	An ID that was provided by the developer of the test application.	//WPFButton[@automationId='okButton']"
name	The name of a control. The Visual Studio designer automatically assigns a name to every control that is created with the designer. The application developer uses this name to identify the control in the application code.	//WPFButton[@name='okButton']"
caption	The text that the control displays. When testing a localized application in multiple languages, use the automationId or name attribute instead of the caption.	//WPFButton[@automationId='Ok']"
className	The simple .NET class name (without namespace) of the WPF control. Using the class name attribute can help to identify a custom control that is derived from a standard WPF control that Silk4NET recognizes.	//WPFButton[@className='MyCustomButton']"

During recording, Silk4NET creates a locator for a WPF control by using the *automationId*, *name*, *caption*, or *className* attributes in the order that they are listed in the preceding table. For example, if a control has a *automationId* and a *name*, Silk4NET uses the *automationId* when creating the locator.

The following example shows how an application developer can define a *name* and an *automationId* for a WPF button in the XAML code of the application:

```
<Button Name="okButton" AutomationProperties.AutomationId="okButton"
Click="okButton_Click">Ok</Button>
```

## Custom Attributes for WPF Applications

WPF applications use the predefined automation property `AutomationProperties.AutomationId` to specify a stable identifier for the WPF control as follows:

```
<Window x:Class="Test.MainWindow"
xmlns="http://schemas.microsoft.com/winfx/2006/xaml/presentation"
xmlns:x="http://schemas.microsoft.com/winfx/2006/xaml"
Title="MainWindow" Height="350" Width="525">
<Grid>
<Button AutomationProperties.AutomationId="AID_buttonA">The
Button</Button>
</Grid>
</Window>
```

Silk4NET automatically uses this property for identification in the locator. WPF application locators look like the following:

```
//WPFWindow[@caption='MainWindow']//WPFButton[@automationId='AID_buttonA']
```

## Classes that Derive from the WPFItemsControl Class

Silk4NET can interact with classes that derive from `WPFItemsControl`, such as `WPFListBox`, `WPFTreeView`, and `WPFMenu`, in two ways:

- Working with the control  
Most controls contain methods and properties for typical use cases. The items are identified by text or index.
- Working with individual items, such as `WPFListBoxItem`, `WPFTreeViewItem`, or `WPFMenuItem`  
For advanced use cases, use individual items. For example, use individual items for opening the context menu on a specific item in a list box, or clicking a certain position relative to an item.

## Custom WPF Controls

Generally, Silk4NET provides record and playback support for all standard WPF controls.

Silk4NET handles custom controls based on the way the custom control is implemented. You can implement custom controls by using the following approaches:

- Deriving classes from `UserControl`  
This is a typical way to create compound controls. Silk4NET recognizes these user controls as `WPFUserControl` and provides full support for the contained controls.
- Deriving classes from standard WPF controls, such as `ListBox`  
Silk4NET treats these controls as an instance of the standard WPF control that they derive from. Record, playback, and recognition of children may not work if the user control behavior differs significantly from its base class implementation.
- Using standard controls that use templates to change their visual appearance  
Low-level replay might not work in certain cases. Switch to high-level playback mode in such cases.

Silk4NET filters out certain controls that are typically not relevant for functional testing. For example, controls that are used for layout purposes are not included. However, if a custom control derives from an excluded class, specify the name of the related WPF class to expose the filtered controls during recording and playback.

## Dynamically Invoking WPF Methods

Dynamic invoke enables you to directly call methods, retrieve properties, or set properties, on an actual instance of a control in the application under test. You can also call methods and properties that are not available in the Silk4NET API for this control. Dynamic invoke is especially useful when you are working with custom controls, where the required functionality for interacting with the control is not exposed through the Silk4NET API.

Call dynamic methods on objects with the `Invoke` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Call multiple dynamic methods on objects with the `InvokeMethods` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Retrieve dynamic properties with the `GetProperty` method and set dynamic properties with the `SetProperty` method. To retrieve a list of supported dynamic properties for a control, use the `GetPropertyList` method.

For example, to call a method named `SetTitle`, which requires the title to be set as an input parameter of type string, on an actual instance of a control in the application under test, type the following:

```
control.Invoke("SetTitle", "my new title")
```

 **Note:** Typically, most properties are read-only and cannot be set.

 **Note:** Reflection is used in most technology domains to call methods and retrieve properties.

## The Invoke Method

For a Windows Forms or a WPF control, you can use the `Invoke` method to call the following methods:

- Public methods that the MSDN defines for the control.
- Public static methods that the MSDN defines.
- User-defined public static methods of any type.

### First Example for the Invoke Method

For an object of the Silk4NET type `DataGrid`, you can call all methods that MSDN defines for the type `System.Windows.Forms.DataGrid`.

To call the method `IsExpanded` of the `System.Windows.Forms.DataGrid` class, use the following code:

```
//VB .NET code
Dim isExpanded As Boolean = dataGrid.Invoke("IsExpanded", 3)

//C# code
bool isExpanded = (bool) dataGrid.Invoke("IsExpanded", 3);
```

### Second Example for the Invoke Method

To invoke the static method `String.Compare(String s1, String s2)` inside the AUT, use the following code:

```
//VB .NET code
Dim result as Integer = (Integer)
mainWindow.Invoke("System.String.Compare", "a", "b")

//C# code
int result = (int) mainWindow.Invoke("System.String.Compare",
"a", "b");
```

### Third Example for the Invoke Method

This example shows how you can dynamically invoke the user-generated method `GetContents`.

You can write code which you can use to interact with a control in the application under test (AUT), in this example an `UltraGrid`. Instead of creating complex dynamic invoke calls to retrieve the contents of the `UltraGrid`, you can generate a new method `GetContents` and then just dynamically invoke the new method.

In Visual Studio, the following code in the AUT defines the `GetContents` method as a method of the `UltraGridUtil` class:

```
//C# code, because this is code in the AUT
namespace UltraGridExtensions {
    public class UltraGridUtil {
        /// <summary>
        /// Retrieves the contents of an UltraGrid as nested list
        /// </summary>
        /// <param name="grid"></param>
        /// <returns></returns>
        public static List<List<string>>
```

```

GetContents(Infragistics.Win.UltraWinGrid.UltraGrid grid) {
    var result = new List<List<string>>();
    foreach (var row in grid.Rows) {
        var rowContent = new List<string>();
        foreach (var cell in row.Cells) {
            rowContent.Add(cell.Text);
        }
        result.Add(rowContent);
    }
    return result;
}
}
}

```

The code for the `UltraGridUtil` class needs to be added to the AUT. You can do this in the following ways:

- The application developer can compile the code for the class into the AUT. The assembly needs to be already loaded.
- You can create a new assembly that is loaded into the AUT during test execution.

To load the assembly, you can use the following code:

```
FormsWindow.LoadAssembly(String assemblyFileName)
```

You can load the assembly by using the full path, for example:

```
mainWindow.LoadAssembly("C:/temp/ultraGridExtensions.dll")
```

You can also find the location of the assembly by using the `Location` method:

```
//VB.NET code
Dim assemblyLocation =
GetType(UltraGridExtensions.UltraGridUtil).Assembly.Location
mainWindow.LoadAssembly(assemblyLocation)
```

```
//C# code
string assemblyLocation =
typeof(UltraGridExtensions.UltraGridUtil).Assembly.Location;
mainWindow.LoadAssembly(assemblyLocation);
```

When the code for the `UltraGridUtil` class is in the AUT, you can add the following code to your test script to invoke the `GetContents` method:

```
var contents = (IList)
mainWindow.Invoke("UltraGridExtensions.UltraGridUtil.GetContents", ultraGrid);
```

The `mainWindow` object, on which the `Invoke` method is called, only identifies the AUT and can be replaced by any other object in the AUT.

### The InvokeMethods Method

For a Windows Forms or a WPF control, you can use the `InvokeMethods` method to invoke a sequence of nested methods. You can call the following methods:

- Public methods that the MSDN defines for the control.
- Public static methods that the MSDN defines.
- User-defined public static methods of any type.

### Example: Getting the Text Contents of a Cell in a Custom Data Grid

To get the text contents of a cell of a custom data grid from the Infragistics library, you can use the following C# code in the AUT:

```
string cellText =  
dataGrid.Rows[rowIndex].Cells[columnIndex].Text;
```

The following C# code sample gets the text contents of the third cell in the first row:

```
string cellText = dataGrid.Rows[0].Cells[2];
```

Scripting the same example by using the `InvokeMethods` method generates a relatively complex script, because you have to pass five methods with their corresponding parameters to the `InvokeMethods` method:

```
// C# code  
var dataGrid = mainWindow.WPFControl("@automationId='Custom  
Data Grid'");  
// Get text contents of third cell in first row.  
var rowIndex = 0;  
var columnIndex = 2;  
  
var methodNames = new List<string>();  
methodNames.Add("Rows");  
    // Get the list of rows from the grid.  
methodNames.Add("get_Item"); //  
Get a specific row from the list of rows by using the indexer  
method.  
methodNames.Add("Cells");  
    // Get the list of cells from the the row.  
methodNames.Add("get_Item"); //  
Get a specific cell from the list of cells by using the indexer  
method.  
methodNames.Add("Text");  
    // Get the text of the cell.  
  
var parameters = new List<List<object>>();  
parameters.Add(new List<object>()); //  
Parameters for the Rows property.  
parameters.Add(new List<object>() { rowIndex }); //  
Parameters for the get_Item method.  
parameters.Add(new List<object>()); //  
Parameters for the Cells property.  
parameters.Add(new List<object>() { columnIndex }); //  
Parameters for the get_Item method.  
parameters.Add(new List<object>()); //  
Parameters for the Text property.  
  
string cellText = (string)dataGrid.InvokeMethods(methodNames,  
parameters);
```

```
' VB .NET code  
Dim dataGrid = mainWindow.WPFControl("@automationId='Custom  
Data Grid'")  
  
' Get text contents of third cell in first row.  
Dim rowIndex = 0  
Dim column = 2  
  
Dim methodNames = New List(Of String)()  
methodNames.Add("Rows") ' Get the list of  
rows from the grid.  
methodNames.Add("get_Item") ' Get a specific row  
from the list of rows by using the indexer method.
```

```

methodNames.Add("Cells")           ' Get the list of
cells from the the row.
methodNames.Add("get_Item")        ' Get a specific cell
from the list of cells by using the indexer method.
methodNames.Add("Text")           ' Get the text of the
cell.

Dim parameters = New List(Of List(Of Object))()
parameters.Add(New List(Of Object)()) '
Parameters for the Rows property.
parameters.Add(New List(Of Object) From {rowIndex}) '
Parameters for the get_Item method.
parameters.Add(New List(Of Object)()) '
Parameters for the Cells property.
parameters.Add(New List(Of Object) From {columnIndex}) '
Parameters for the get_Item method.
parameters.Add(New List(Of Object)()) '
Parameters for the Text property.

Dim cellText As String = dataGrid.InvokeMethods(methodNames,
parameters)

```

A better approach in such a case is to add code to the application under test and then to use the `InvokeMethods` method. For this example, add the `GetCellText` method to the AUT:

```

// C# code, if the AUT is implemented in C#.
public static string
GetCellText(Infragistics.Win.UltraWinGrid.UltraGrid dataGrid,
int rowIndex, int columnIndex) {
    return dataGrid.Rows[rowIndex].Cells[columnIndex].Text;
}

' VB code, if the AUT is implemented in VB.
public static string
GetCellText(Infragistics.Win.UltraWinGrid.UltraGrid dataGrid,
int rowIndex, int columnIndex) {
    return dataGrid.Rows[rowIndex].Cells[columnIndex].Text;
}

```

To get the text contents of the cell, dynamically invoke the `GetCellText` method from your test script:

```

// C# code
string cellText = (string) mainWindow.Invoke("GetCellText",
dataGrid, rowIndex, columnIndex);

'VB .NET code
Dim cellText As String = mainWindow.Invoke("GetCellText",
dataGrid, rowIndex, columnIndex)

```

For additional information, see *Adding Code to the Application Under Test to Test Custom Controls*.

## Supported Methods and Properties

The following methods and properties can be called:

- Methods and properties that Silk4NET supports for the control.
- All public methods and properties that the MSDN defines for the control.
- If the control is a custom control that is derived from a standard control, all methods and properties from the standard control can be called.

## Supported Parameter Types

The following parameter types are supported:

- All built-in Silk4NET types

Silk4NET types includes primitive types (such as boolean, int, string), lists, and other types (such as Point and Rect).

- Enum types

Enum parameters must be passed as string. The string must match the name of an enum value. For example, if the method expects a parameter of the .NET enum type `System.Windows.Visibility` you can use the string values of `Visible`, `Hidden`, or `Collapsed`.

- .NET structs and objects

.NET struct and object parameters must be passed as a list. The elements in the list must match one constructor for the .NET object in the test application. For example, if the method expects a parameter of the .NET type `System.Windows.Vector`, you can pass a list with two integers. This works because the `System.Windows.Vector` type has a constructor with two integer arguments.

- WPF controls

WPF control parameters can be passed as `TestObject`.

## Returned Values

The following values are returned for properties and methods that have a return value:

- The correct value for all built-in Silk4NET types. These types are listed in the *Supported Parameter Types* section.
- All methods that have no return value return `null` in C# or `Nothing` in VB.
- A string for all other types

Call `ToString` on returned .NET objects to retrieve the string representation

### Example

For example, when an application developer creates a custom calculator control that offers the following methods and the following property:

```
public void Reset()
public int Add(int number1, int number2)
public System.Windows.Vector StretchVector(System.Windows.Vector
vector, double
factor)
public String Description { get; }
```

The tester can call the methods directly from his test. For example:

```
customControl.Invoke("Reset")
Dim sum as Integer = customControl.Invoke("Add", 1, 2)
' the vector can be passed as list of integer
Dim vector = New List(Of Integer)
vector.Add(3)
vector.Add(4)
' returns "6;8" because this is the string representation of
the .NET object
Dim stretchedVector As String =
customControl.Invoke("StretchVector", vector, 2.0)
Dim description As String =
customControl.GetProperty("Description")
```

## Setting WPF Classes to Expose During Recording and Playback

Silk4NET filters out certain controls that are typically not relevant for functional testing. For example, controls that are used for layout purposes are not included. However, if a custom control derives from an

excluded class, specify the name of the related WPF class to expose the filtered controls during recording and playback.

Specify the names of any WPF classes that you want to expose during recording and playback. For example, if a custom class called *MyGrid* derives from the WPF `Grid` class, the objects of the *MyGrid* custom class are not available for recording and playback. `Grid` objects are not available for recording and playback because the `Grid` class is not relevant for functional testing since it exists only for layout purposes. As a result, `Grid` objects are not exposed by default. In order to use custom classes that are based on classes that are not relevant to functional testing, add the custom class, in this case *MyGrid*, to the **OPT\_WPF\_CUSTOM\_CLASSES** option. Then you can record, playback, find, verify properties, and perform any other supported actions for the specified classes.

1. Click **Silk4NET > Edit Options**.
2. Click the **WPF** tab.
3. In the **Custom WPF class names** grid, type the name of the class that you want to expose during recording and playback.  
Separate class names with a comma.
4. Click **OK**.

## Setting Pre-Fill During Recording and Replaying

Defines whether items in a `WPFIItemsControl`, like `WPFComboBox` or `WPFListBox`, are pre-filled during recording and playback. WPF itself lazily loads items for certain controls, so these items are not available for Silk4NET if they are not scrolled into view. Turn pre-filling on, which is the default setting, to additionally access items that are not accessible without scrolling them into view. However, some applications have problems when the items are pre-filled by Silk4NET in the background, and these applications can therefore crash. In this case turn pre-filling off.

1. Click **Silk4NET > Edit Options**.
2. Click the **WPF** tab.
3. In the **Pre-fill items** area, check the **OPT\_WPF\_PREFILL\_ITEMS** check box.
4. Click **OK**.

## Silverlight Application Support

Microsoft Silverlight (Silverlight) is an application framework for writing and running rich internet applications, with features and purposes similar to those of Adobe Flash. The run-time environment for Silverlight is available as a plug-in for most web browsers.

Silk4NET provides built-in support for testing Silverlight applications. Silk4NET supports Silverlight applications that run in a browser as well as out-of-browser and can record and play back controls in .NET version 3.5 or later.

The following applications, that are based on Silverlight, are supported:

- Silverlight applications that run in Internet Explorer.
- Out-of-Browser Silverlight applications.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

### Supported Controls

Silk4NET includes record and replay support for Silverlight controls.

For a complete list of the controls available for Silverlight testing, see the *Silverlight Class Reference*.



**Note:** With Silk Test 14.0 or later, Silk4NET recognizes only Silverlight controls that are available for interaction and visible on the screen. This change might change the behavior of tests that were

recorded with a Silk Test version prior to Silk Test 14.0. To run such tests with Silk Test 14.0 or later, remove all invisible or not yet available Silverlight controls from the tests.

## Prerequisites

The support for testing Silverlight applications in Microsoft Windows XP requires the installation of Service Pack 3 and the Update for Windows XP with the Microsoft User Interface Automation that is provided in Windows 7. You can download the update from <http://www.microsoft.com/download/en/details.aspx?id=13821>.



**Note:** The Microsoft User Interface Automation needs to be installed for the Silverlight support. If you are using a Windows operating system and the Silverlight support does not work, you can install the update with the Microsoft User Interface Automation, which is appropriate for your operating system, from <http://support.microsoft.com/kb/971513>.

## Silverlight Class Reference

When you configure a Silverlight application, Silk4NET automatically provides built-in support for testing standard Silverlight controls.

## Locator Attributes for Identifying Silverlight Controls

Supported locator attributes for Silverlight controls include:

- *automationId*
- *caption*
- *className*
- *name*
- All dynamic locator attributes



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

For additional information on dynamic locator attributes, see *Dynamic Locator Attributes*.

To identify components within Silverlight scripts, you can specify the *automationId*, *caption*, *className*, *name* or any dynamic locator attribute. The *automationId* can be set by the application developer. For example, a locator with an *automationId* might look like `//SLButton[@automationId="okButton"]`.

We recommend using the *automationId* because it is typically the most useful and stable attribute.

Attribute Type	Description	Example
automationId	An identifier that is provided by the developer of the application under test. The Visual Studio designer automatically assigns an <i>automationId</i> to every control that is created with the designer. The application developer uses this ID to identify the control in the application code.	// SLButton[@automationId="okButton"]
caption	The text that the control displays. When testing a localized application in multiple languages, use the <i>automationId</i> or <i>name</i> attribute instead of the <i>caption</i> .	//SLButton[@caption="Ok"]
className	The simple .NET class name (without namespace) of the Silverlight control. Using the <i>className</i> attribute can help to identify a custom control that is derived from a standard Silverlight control that Silk4NET recognizes.	// SLButton[@className='MyCustomButton']
name	The name of a control. Can be provided by the developer of the application under test.	//SLButton[@name="okButton"]



**Attention:** The *name* attribute in XAML code maps to the locator attribute *automationId*, not to the locator attribute *name*.

During recording, Silk4NET creates a locator for a Silverlight control by using the *automationId*, *name*, *caption*, or *className* attributes in the order that they are listed in the preceding table. For example, if a control has an *automationId* and a *name*, Silk4NET uses the *automationId*, if it is unique, when creating the locator.

The following table shows how an application developer can define a Silverlight button with the text "Ok" in the XAML code of the application:

XAML Code for the Object	Locator to Find the Object from Silk Test
<code>&lt;Button&gt;Ok&lt;/Button&gt;</code>	<code>//SLButton[@caption="Ok" ]</code>
<code>&lt;Button Name="okButton"&gt;Ok&lt;/Button&gt;</code>	<code>//SLButton[@automationId="okButton" ]</code>
<code>&lt;Button AutomationProperties.AutomationId="okB utton"&gt;Ok&lt;/Button&gt;</code>	<code>//SLButton[@automationId="okButton" ]</code>
<code>&lt;Button AutomationProperties.Name="okButton"&gt;O k&lt;/Button&gt;</code>	<code>//SLButton[@name="okButton" ]</code>

## Dynamically Invoking Silverlight Methods

Dynamic invoke enables you to directly call methods, retrieve properties, or set properties, on an actual instance of a control in the application under test. You can also call methods and properties that are not available in the Silk4NET API for this control. Dynamic invoke is especially useful when you are working with custom controls, where the required functionality for interacting with the control is not exposed through the Silk4NET API.

Call dynamic methods on objects with the `Invoke` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Call multiple dynamic methods on objects with the `InvokeMethods` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Retrieve dynamic properties with the `GetProperty` method and set dynamic properties with the `SetProperty` method. To retrieve a list of supported dynamic properties for a control, use the `GetPropertyList` method.

For example, to call a method named `SetTitle`, which requires the title to be set as an input parameter of type string, on an actual instance of a control in the application under test, type the following:

```
control.Invoke("SetTitle", "my new title")
```



**Note:** Typically, most properties are read-only and cannot be set.



**Note:** Reflection is used in most technology domains to call methods and retrieve properties.

### Supported Parameter Types

The following parameter types are supported:

- All built-in Silk4NET types.
  - Silk4NET types include primitive types, for example boolean, int, and string, lists, and other types, for example Point and Rect.
- Enum types.

Enum parameters must be passed as string. The string must match the name of an enum value. For example, if the method expects a parameter of the .NET enum type `System.Windows.Visibility` you can use the string values of `Visible`, `Hidden`, or `Collapsed`.

- .NET structs and objects.

Pass .NET struct and object parameters as a list. The elements in the list must match one constructor for the .NET object in the test application. For example, if the method expects a parameter of the .NET type `System.Windows.Vector`, you can pass a list with two integers. This works because the `System.Windows.Vector` type has a constructor with two integer arguments.

- Other controls.

Control parameters can be passed as `TestObject`.

## Supported Methods and Properties

The following methods and properties can be called:

- All public methods and properties that the MSDN defines for the `AutomationElement` class. For additional information, see <http://msdn.microsoft.com/en-us/library/system.windows.automation.automationelement.aspx>.
- All methods and properties that MSUIA exposes. The available methods and properties are grouped in "patterns". Pattern is a MSUIA specific term. Every control implements certain patterns. For an overview of patterns in general and all available patterns see <http://msdn.microsoft.com/en-us/library/ms752362.aspx>. A custom control developer can provide testing support for the custom control by implementing a set of MSUIA patterns.

## Returned Values

The following values are returned for properties and methods that have a return value:

- The correct value for all built-in Silk4NET types.
- All methods that have no return value return `null` in C# or `Nothing` in VB.
- A string for all other types.

To retrieve this string representation, call the `ToString` method on returned .NET objects in the application under test.

### Example

```
A TabItem in Silverlight, which is an item in a TabControl.  
tabItem.Invoke("SelectedItemPattern.Select")  
mySilverlightObject.GetProperty("IsPassword")
```

## Scrolling in Silverlight

Silk4NET provides two different sets of scrolling-related methods and properties, depending on the Silverlight control.

- The first type of controls includes controls that can scroll by themselves and therefore do not expose the scrollbars explicitly as children. For example combo boxes, panes, list boxes, tree controls, data grids, auto complete boxes, and others.
- The second type of controls includes controls that cannot scroll by themselves but expose scrollbars as children for scrolling. For example text fields.

This distinction in Silk4NET exists because the controls in Silk4NET implement scrolling in those two ways.

## Controls that support scrolling

In this case, scrolling-related methods and property are available for the control that contains the scrollbars. Therefore, Silk4NET does not expose scrollbar objects.

### Examples

The following command scrolls a list box to the bottom:

```
listBox.SetVerticalScrollPercent(100)
```

The following command scrolls the list box down by one unit:

```
listBox.ScrollVertical(ScrollAmount.SmallIncrement)
```

## Controls that do not support scrolling

In this case the scrollbars are exposed. No scrolling-related methods and properties are available for the control itself. The horizontal and vertical scrollbar objects enable you to scroll in the control by specifying the increment or decrement, or the final position, as a parameter in the corresponding API functions. The increment or decrement can take the values of the ScrollAmount enumeration. For additional information, refer to the Silverlight documentation. The final position is related to the position of the object, which is defined by the application designer.

### Examples

The following command scrolls a vertical scrollbar within a text box to position 15:

```
textBox.SLVerticalScrollBar().ScrollToPosition(15)
```

The following command scrolls a vertical scrollbar within a text box to the bottom:

```
textBox.SLVerticalScrollBar().ScrollToMaximum()
```

## Troubleshooting when Testing Silverlight Applications

### Silk4NET cannot see inside the Silverlight application and no green rectangles are drawn during recording

The following reasons may cause Silk4NET to be unable to see inside the Silverlight application:

Reason	Solution
You use a Silverlight version prior to 3.	Use Silverlight 3 (Silverlight Runtime 4) or Silverlight 4 (Silverlight Runtime 4).
Your Silverlight application is running in windowless mode.	<p>Silk4NET does not support Silverlight applications that run in windowless mode. To test such an application, you need to change the Web site where your Silverlight application is running. Therefore you need to set the <code>windowless</code> parameter in the object tag of the HTML or ASPX file, in which the Silverlight application is hosted, to <code>false</code>.</p> <p>The following sample code sets the <code>windowless</code> parameter to <code>false</code>:</p> <pre>&lt;object ...&gt;   &lt;param name="windowless"   value="false"/&gt;</pre>

Reason	Solution
	<pre>... &lt;/object&gt;</pre>

## Visual COBOL Support

Silk4NET supports recording and replaying tests against Visual COBOL applications. You can also use the Silk4NET APIs from .NET COBOL to script automated tests for the following Visual COBOL applications:

- Dialog system applications.
- CGI applications.
- Cobol Win32 applications.
- .NET COBOL - WPF and Windows Forms applications.
- COBOL JVM - Swing applications.
- Non-COBOL front-end applications calling back-end COBOL.




**Note:** For some controls, Silk4NET provides only low-level recording support.

For information on the supported versions of Visual COBOL, refer to the [Release Notes](#).

### Example: Testing a Visual COBOL Application


This topic describes how you can test a Visual COBOL application with Silk4NET. For this example we test the **WPF Book**, which is a .NET COBOL sample application.

When you install Visual COBOL, you also install the Visual COBOL sample applications. You can use the **Samples Browser** to open the sample applications in Visual Studio. For additional information on the **Samples Browser**, refer to the Visual COBOL documentation.

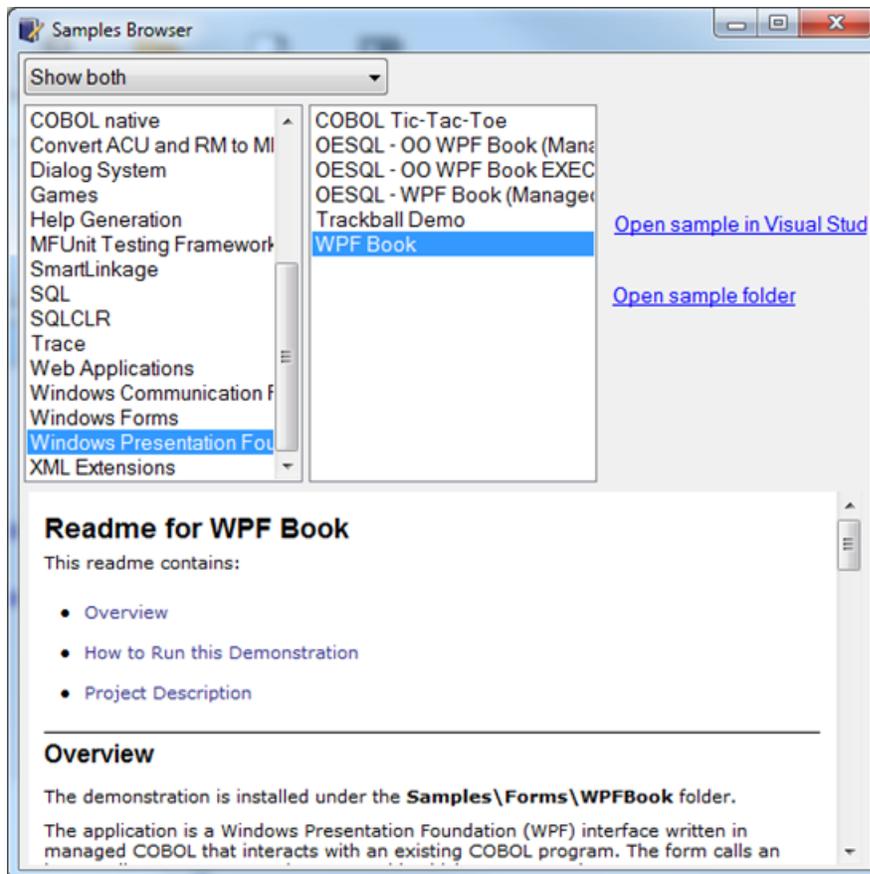


 **Note:** The following example was performed with Visual Studio 2015 and Micro Focus Visual COBOL for Visual Studio 2015. In other versions of these projects, the user interfaces might look slightly different.

1. To open the **WPF Book** in Visual Studio, open the **Samples Browser**, select **Windows Presentation Foundation**, and select **WPF Book** from the list. Then click **Open sample in Visual Studio**.
2. In Visual Studio, open the **Solution Explorer** to access the WPF Book solution.
3. Right-click on the **WPFBook** project in the solution and click **Build** to build the project.
4. Open the **Samples Browser** again to access the newly built executable.
5. Select the **WPF Book** and click **Open sample folder**.
6. Navigate to `WPFBook\Bin\Debug`.
7. Double-click `WPFBook.exe`.
8. Create a new Silk4NET project in Visual Studio.

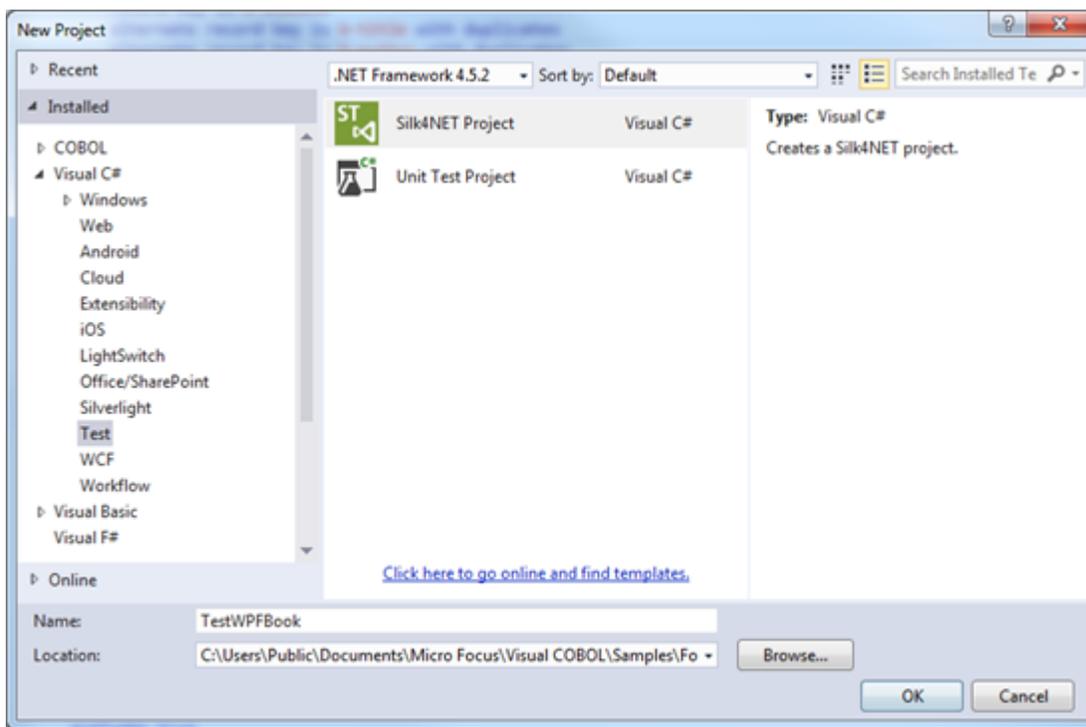


9. Start recording a new Silk4NET test.

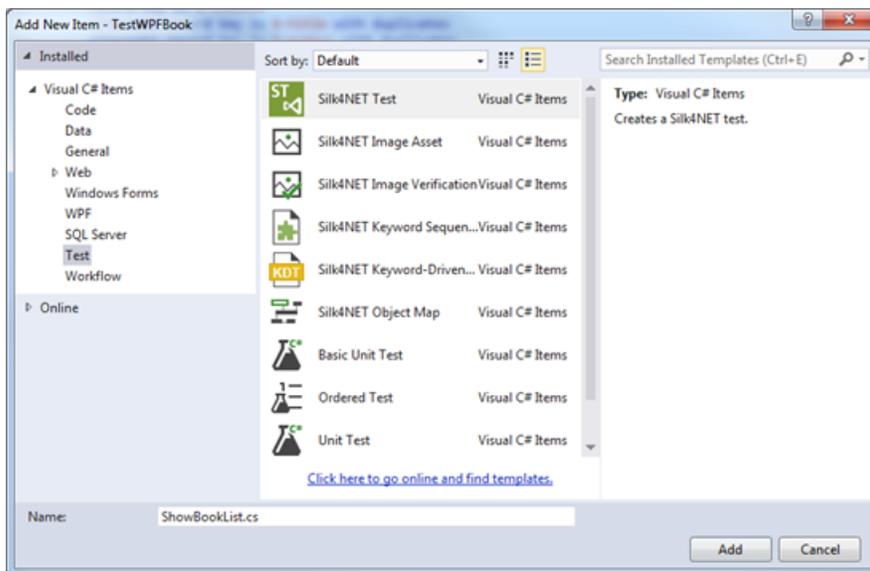

10. In the **Select Application** dialog box, select the **Windows** tab.


11. Click **WPFForm Book Demo**.

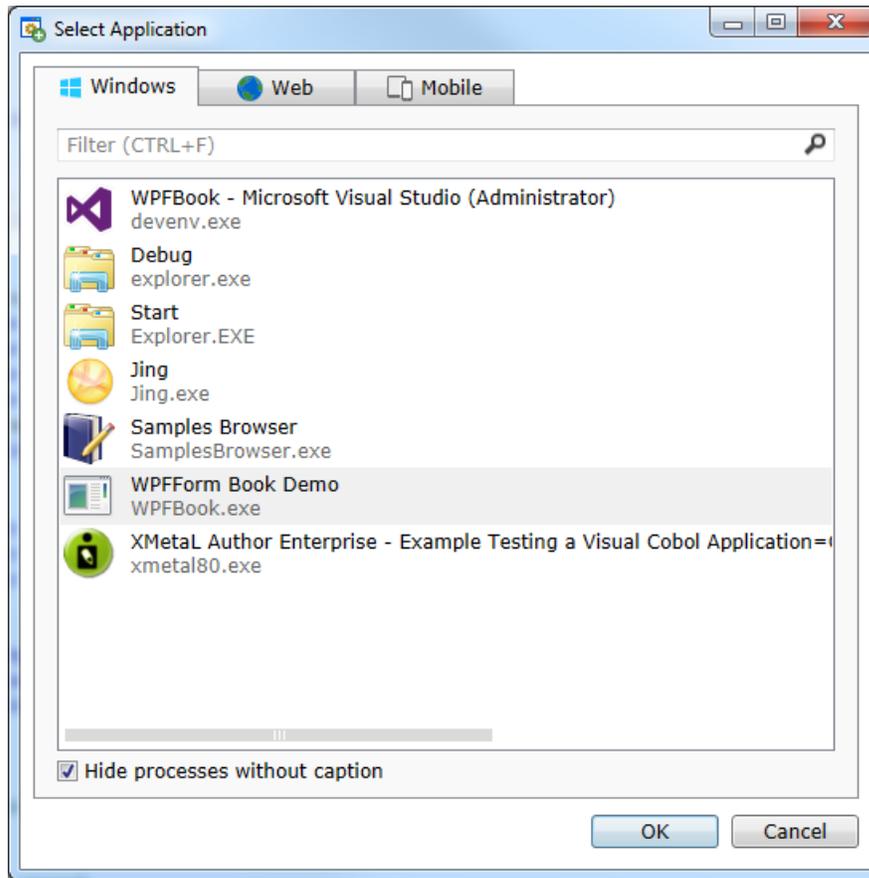

12. Click **OK**.

13. In the **WPFForm Book Demo**, click **Show List of Books**.

14. Move the mouse cursor over the **RetailPrice** column of *Oliver Twist* and click **Ctrl+Alt** to verify that the retail price is 10.00.

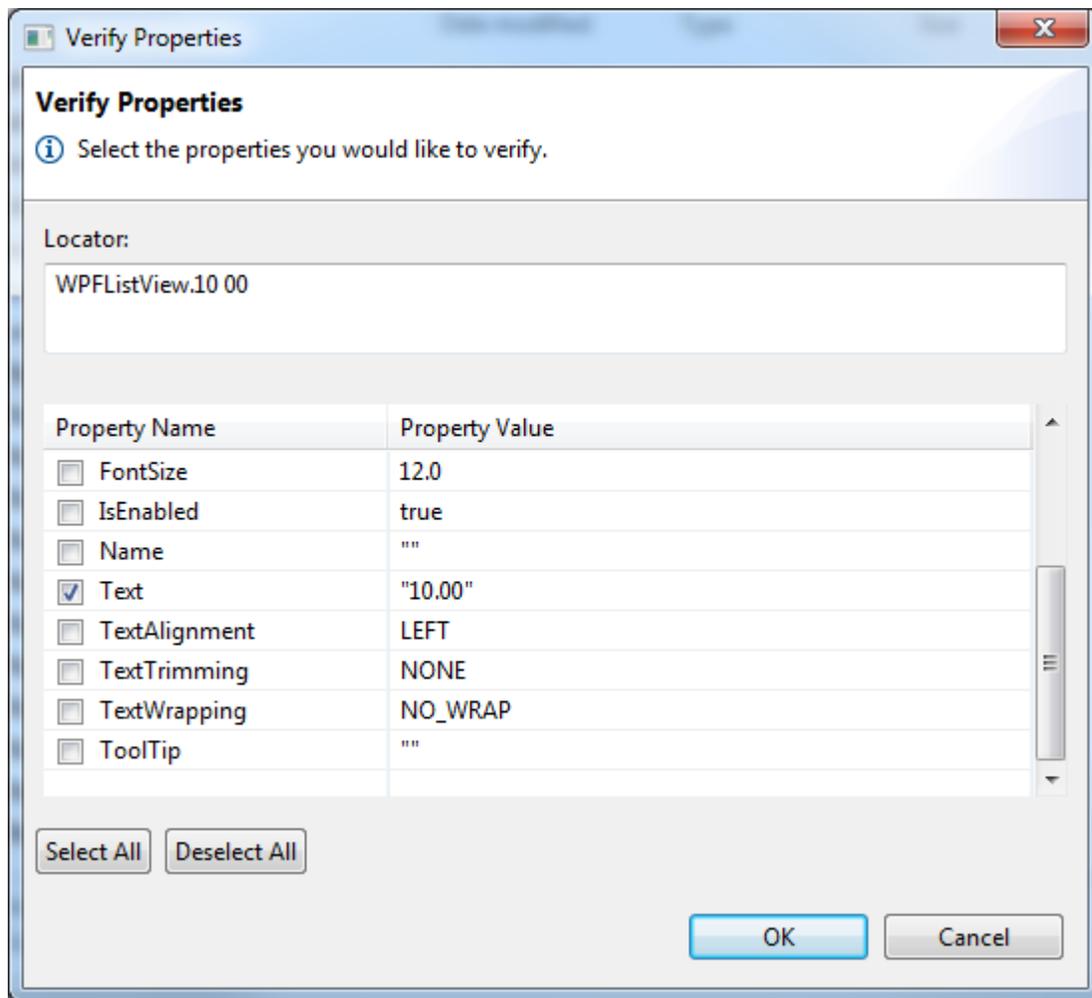

15. Click **OK** in the **Verify Properties** dialog box.


16. Click **Close** in the **WPFListView** window.



17. Click **Stop** in the **Recorder** window.

18. In Visual Studio, right-click on the recorded test method and select **Run Tests**.

The test should pass, and you can now explore the test results.

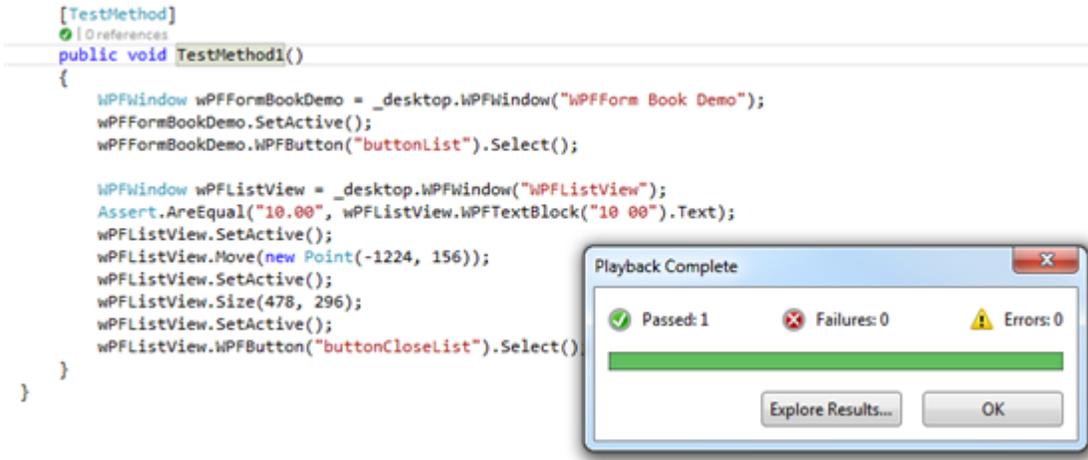

## Rumba Support

Rumba is the world's premier Windows desktop terminal emulation solution. Silk Test provides built-in support for recording and replaying Rumba.

When testing with Rumba, please consider the following:

- The Rumba version must be compatible to the Silk Test version. Versions of Rumba prior to version 8.1 are not supported.
- All controls that surround the green screen in Rumba are using basic WPF functionality (or Win32).
- The supported Rumba desktop types are:
  - Mainframe Display
  - AS400 Display
  - Unix Display

For a complete list of the record and replay controls available for Rumba testing, see the *Rumba Class Reference*.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

## Rumba Class Reference

When you configure a Rumba application, Silk4NET automatically provides built-in support for testing standard Rumba controls.

## Enabling and Disabling Rumba

Rumba is the world's premier Windows desktop terminal emulation solution. Rumba provides connectivity solutions to mainframes, mid-range, UNIX, Linux, and HP servers.

### Enabling Support

Before you can record and replay Rumba scripts, you need to enable support:

1. Install Rumba desktop client software version 8.1 or later.
2. Click (in Microsoft Windows 7) **Start > Programs > Silk > Silk Test > Administration > Rumba plugin > Enable Silk Test Rumba plugin** or (in Microsoft Windows 10) **Start > Silk > Enable Silk Test Rumba plugin**.

## Disabling Support

Click (in Microsoft Windows 7) **Start > Programs > Silk > Silk Test > Administration > Rumba plugin > Disable Silk Test Rumba plugin** or (in Microsoft Windows 10) **Start > Silk > Disable Silk Test Rumba plugin**.

## Locator Attributes for Identifying Rumba Controls

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests. Supported attributes include:

<b>caption</b>	The text that the control displays.
<b>priorlabel</b>	Since input fields on a form normally have a label explaining the purpose of the input, the intention of <b>priorlabel</b> is to identify the text input field, <b>RumbaTextField</b> , by the text of its adjacent label field, <b>RumbaLabel</b> . If no preceding label is found in the same line of the text field, or if the label at the right side is closer to the text field than the left one, a label on the right side of the text field is used.
<b>StartRow</b>	This attribute is not recorded, but you can manually add it to the locator. Use <b>StartRow</b> to identify the text input field, <b>RumbaTextField</b> , that starts at this row.
<b>StartColumn</b>	This attribute is not recorded, but you can manually add it to the locator. Use <b>StartColumn</b> to identify the text input field, <b>RumbaTextField</b> , that starts at this column.
<b>All dynamic locator attributes.</b>	For additional information on dynamic locator attributes, see <i>Dynamic Locator Attributes</i> .



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

## Using Screen Verifications with Rumba

To automatically insert screen verifications in Rumba, turn on the following option in the **Options** dialog box: **Record > General > Record Screen Verifications**.

To manually insert screen verifications:

1. In your test, click the **Create Verification Type Logic** button to open the **Test Logic Designer - Verification**.
2. Click **Next**.
3. Select **The Contents of a Screen**.

Any excluded objects as identified in **Tools > Options > Record > Rumba > Excluded Objects** will be used. You can customize these further in the **Properties** window of the test after you finish performing this procedure.

4. Click **Next**.
5. Click the **Identify** button.
6. Select the control on the Rumba Screen that you want to identify. The whole screen will be captured.
7. Click **Next**.
8. Click **Finish**.

# Testing a Unix Display

Unix displays in Rumba are completely text-based, and provide no UI controls except the main **RUMBA screen** control. To replay a test on a Unix display, you can use the `SendKeys` method to send keys to the Unix display. Silk4NET does not support recording on a Unix display.

## SAP Support

Silk4NET provides built-in support for testing SAP client/server applications based on the Windows-based GUI module.

 **Note:** You can only test SAP applications with Silk4NET if you have a Premium license for Silk4NET. For additional information on the licensing modes, see [Licensing Information](#).

 **Note:** If you use SAP NetWeaver with Internet Explorer or Firefox, Silk4NET tests the application using the xBrowser technology domain.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

### Supported Controls

For a complete list of the record and replay controls available for SAP testing, see the [SAP Class Reference](#).

For a list of supported attributes, see [Attributes for SAP Applications](#).

## SAP Class Reference

When you configure a SAP application, Silk4NET automatically provides built-in support for testing standard SAP controls.

 **Note:** To enable Silk4NET to recognize SAP controls, enable SAP GUI Scripting on the server. For information on enabling SAP GUI scripting, see [Introduction to SAP Gui Scripting](#). If SAP GUI Scripting is not enabled, Silk4NET recognizes all controls as Win32 and custom controls.

The classes included in the SAP class reference, along with all included properties and methods, are part of the SAP Automation module that is directly accessible through Silk4NET.

 **Note:** The interface, including the underlying algorithms and the behavior of the interface, is not under the control of Silk4NET.

## Attributes for SAP Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for SAP include:

- automationId
- caption

 **Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

# Dynamically Invoking SAP Methods

Dynamic invoke enables you to directly call methods, retrieve properties, or set properties, on an actual instance of a control in the application under test. You can also call methods and properties that are not available in the Silk4NET API for this control. Dynamic invoke is especially useful when you are working with custom controls, where the required functionality for interacting with the control is not exposed through the Silk4NET API.

Call dynamic methods on objects with the `Invoke` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Call multiple dynamic methods on objects with the `InvokeMethods` method. To retrieve a list of supported dynamic methods for a control, use the `GetDynamicMethodList` method.

Retrieve dynamic properties with the `GetProperty` method and set dynamic properties with the `SetProperty` method. To retrieve a list of supported dynamic properties for a control, use the `GetPropertyList` method.

For example, to call a method named `SetTitle`, which requires the title to be set as an input parameter of type string, on an actual instance of a control in the application under test, type the following:

```
control.Invoke("SetTitle", "my new title")
```



**Note:** Typically, most properties are read-only and cannot be set.



**Note:** Reflection is used in most technology domains to call methods and retrieve properties.

## Supported Methods and Properties

The following methods and properties can be called:

- Methods and properties that Silk4NET supports for the control.
- All public methods that the SAP automation interface defines
- If the control is a custom control that is derived from a standard control, all methods and properties from the standard control can be called.

## Supported Parameter Types

The following parameter types are supported:

- All built-in Silk4NET types  
Silk4NET types includes primitive types (such as boolean, int, string), lists, and other types (such as Point and Rect).
- UI controls  
UI controls can be passed or returned as `TestObject`.

## Returned Values

The following values are returned for properties and methods that have a return value:

- The correct value for all built-in Silk4NET types. These types are listed in the *Supported Parameter Types* section.
- All methods that have no return value return `null` in C# or `Nothing` in VB.

# Dynamically Invoking Methods on SAP Controls

When Silk4NET cannot record actions against an SAP control, you can record the actions with the recorder that is available in SAP and then dynamically invoke the recorded methods in a Silk4NET script. By doing so, you can replay actions against SAP controls that you cannot record.

1. To record the actions that you want to perform against the control, use the **SAP GUI Scripting** tool that is available in SAP.  
For additional information on the **SAP GUI Scripting** tool, refer to the SAP documentation.
2. Open the recorded actions from the location to which the **SAP GUI Scripting** tool has saved them and see what methods were recorded.
3. In Silk4NET, dynamically invoke the recorded methods from your script.

## Examples

For example, if you want to replay pressing a special control in the SAP UI, which is labeled *Test* and which is a combination of a button and a list box, and selecting the sub-menu *subsub2* of the control, you can record the action with the recorder that is available in SAP. The resulting code will look like the following:

```
session.findById("wnd[0]/usr/cntlCONTAINER/shellcont/shell").pressContextButton "TEST"
session.findById("wnd[0]/usr/cntlCONTAINER/shellcont/shell").selectContextMenuItem "subsub2"
```

Now you can use the following code to dynamically invoke the methods `pressContextButton` and `selectContextMenuItem` in your script in Silk4NET:

```
.SapToolBarControl("shell
ToolBarControl").Invoke("pressContextButton", "TEST")
.SapToolBarControl("shell
ToolBarControl").Invoke("selectContextMenuItem", "subsub2")
```

Replaying this code will press the control in the SAP UI and select the sub-menu.

# Configuring Automation Security Settings for SAP

Before you launch an SAP application, you must configure the security warning settings. Otherwise, a security warning, *A script is trying to attach to the GUI, displays each time a test plays back an SAP application.*

1. In **Windows Control Panel**, choose **SAP Configuration**. The **SAP Configuration** dialog box opens.
2. In the **Design Selection** tab, uncheck the **Notify When a Script Attaches to a Running SAP GUI**.

# Windows API-Based Application Support

Silk4NET provides built-in support for testing Microsoft Windows API-based applications. Several objects exist in Microsoft applications that Silk4NET can better recognize if you enable Accessibility. For example, without enabling Accessibility Silk4NET records only basic information about the menu bar in Microsoft Word and the tabs that appear in Internet Explorer versions later than version 7.0. However, with Accessibility enabled, Silk4NET fully recognizes those objects. You can also improve Silk4NET object recognition by defining a new window, if necessary.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

## Supported Controls

For a complete list of the record and replay controls available for Windows-based testing, see *Win32 Class Reference*.

# Win32 Class Reference

When you configure a Win32 application, Silk4NET automatically provides built-in support for testing standard Windows API-based controls.

## Attributes for Windows API-based Client/Server Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Windows API-based client/server applications include:

- caption
- windowid
- priorlabel: Helps to identify text input fields by the text of its adjacent label field. Every input field of a form usually has a label that explains the purpose of the input. For controls that do not have a caption, the attribute **priorlabel** is automatically used in the locator. For the **priorlabel** value of a control, for example a text box, the caption of the closest label at the left side or above the control is used.



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

## Determining the priorLabel in the Win32 Technology Domain

To determine the priorLabel in the Win32 technology domain, all labels and groups in the same window as the target control are considered. The decision is then made based upon the following criteria:

- Only labels either above or to the left of the control, and groups surrounding the control, are considered as candidates for a priorLabel.
- In the simplest case, the label closest to the control is used as the priorLabel.
- If two labels have the same distance to the control, the priorLabel is determined based upon the following criteria:
  - If one label is to the left and the other above the control, the left one is preferred.
  - If both levels are to the left of the control, the upper one is preferred.
  - If both levels are above the control, the left one is preferred.
- If the closest control is a group control, first all labels within the group are considered according to the rules specified above. If no labels within the group are eligible, then the caption of the group is used as the priorLabel.

## Cross-Browser Testing

With Silk4NET, you can easily verify the functionality of even the most advanced web application across a variety of browsers, with a single, portable test script. Silk4NET provides leading support for effective and maintainable cross-browser testing with modern web technologies.

One of the main challenges in test automation is to create and maintain test cost effectively. As different browsers behave differently, web application validation is hard to carry out productively. Silk4NET enables you to focus on writing tests, as it handles the following three areas of cross-browser testing:

- Built-in synchronization** This enables you to create scripts that run on all supported browsers, without the need to manually synchronize against asynchronous events, which are typical of highly dynamic web applications such as AJAX, or HTML5. Silk4NET supports synchronization modes for HTML or AJAX as well as all major web environments including Apache Flex, Microsoft Silverlight, and HTML5/AJAX. For additional information, see [Page Synchronization for xBrowser](#).
- Unified object model** Silk4NET enables you to create and maintain a test which runs across a wide range of different browsers. A unified object model across all browsers gives you the ability to focus on a single browser when you create or maintain a test. Silk4NET ensures that the object you interact with is accessible in the same way on all the other browsers, which saves time and enables you to focus on testing rather than on finding workarounds for different browsers.
- Out-of-the-box recording of a cross-browser script** Record a script once and replay it in all the other browsers, without any modifications. This significantly reduces the time and effort it takes to create and maintain test scripts. Nothing is simulated - testing is carried out across real browsers, which ensures that the test behaves exactly as it does for your end user.

With Silk4NET, you can test web applications that use:

- Internet Explorer.
- Mozilla Firefox.
- Google Chrome.
- Microsoft Edge.
- Chrome for Android on an Android device.
- Apple Safari, both on a Mac and on an iOS device.
- Embedded browser controls.



**Note:** You can record tests for web applications using one of the following browsers:

- Internet Explorer.
- Microsoft Edge.
- Mozilla Firefox.
- Google Chrome 50 or later.
- A mobile browser on a mobile device.

You can replay tests or record locators on any other supported browser.



**Note:** Before you record or playback web applications, disable all browser add-ons that are installed in your system. To disable add-ons in Internet Explorer, click **Tools > Internet Options**, click the **Programs** tab, click **Manage add-ons**, select an add-on and then click **Disable**.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

## Sample Applications

To access the Silk Test sample web applications, go to:

- <http://demo.borland.com/InsuranceWebExtJS/>
- <http://demo.borland.com/gmopost>
- <http://demo.borland.com/gmoajax>

# Selecting the Browser for Test Replay

You can define the browser that is used for the replay of a test in the following ways:

- If you execute a test from the UI of Silk4NET and the **Select Browser** dialog box displays, the browser selected in the dialog box is used, and Silk4NET ignores which browser is set in the test script.
- If the **Select Browser** dialog box is disabled, because the **Don't show again** is checked, the application configurations in the individual test scripts determine the browser that is used to execute the tests.



**Note:** To re-enable the **Select Browser** dialog box, click **Silk4NET > Edit Application Configurations** and check the **Show 'Select Browser' dialog before record and playback** check box

- If you execute a script from the command line or from a Continuous Integration (CI) server, specify the connection string in the application configuration of the script.

To overwrite the browser that is specified in the application configuration, use the `silktest.configurationName` environment variable.

- If you execute a test from Silk Central, create a configuration suite with a configuration for each browser that you want to test. Then specify the appropriate configuration name. For additional information, refer to the [Silk Central Help](#).

## Examples of setting the browser by using the `silktest.configurationName` environment variable

- To use Internet Explorer as the browser, type:

```
SET silktest.configurationName=InternetExplorer
```

- To use Microsoft Edge as the browser, type:

```
SET silktest.configurationName=Edge
```

- To use Mozilla Firefox as the browser, type:

```
SET silktest.configurationName=Firefox
```

- To use Google Chrome as the browser, type:

```
SET silktest.configurationName=GoogleChrome
```

- To use Apple Safari on a Mac as the browser, type:

```
SET silktest.configurationName=host=10.0.0.1 - Safari
```

In this example, the `host` is the Mac, on which you want to test Apple Safari. The host needs to be connected as a remote location to the machine on which Silk4NET is running. For additional information, see [Editing Remote Locations](#).

- To use Google Chrome on an Android device as the browser, use a connection string. For example, if the device ID is 11111111 and the device is connected to the remote machine with the IP address 10.0.0.1, type:

```
SET silktest.configurationName="platformName=Android;deviceName=Mo toG3;deviceId=11111111;host=10.0.0.1 - Chrome"
```

- To use Apple Safari on an iOS device as the browser, use a connection string. For example, if the device ID is 11111111 and the device is connected to the remote machine with the IP address 10.0.0.1, type:

```
SET silktest.configurationName="platformName=iOS;deviceName=iPad mini;deviceId=11111111;host=10.0.0.1"
```

Additionally, you have to specify the browser in the application configuration.



**Tip:** For all examples, you can also set the browser by setting the Java System property `-Dsilktest.configurationName` instead

of setting the environment variable `silktest.configurationName`. For example, to use Apple Safari on a Mac as the browser, you can also type:

```
-Dsilktest.configurationName=host=10.0.0.1 -  
Safari
```



**Tip:** Open the **Select Browser** dialog box, for example by starting to replay or record from the Silk4NET UI, to see a list of the browsers that are currently available on your system.

## Test Objects for xBrowser

Silk4NET uses the following classes to model a web application:

Class	Description
BrowserApplication	Exposes the main window of a web browser and provides methods for tabbing.
BrowserObject	Represents the base class for all objects that are contained within a BrowserApplication.
BrowserWindow	Provides access to tabs and embedded browser controls and provides methods for navigating to different pages.
DomElement	Exposes the DOM tree of a web application, including frames, and provides access to all DOM attributes. Specialized classes are available for several DOM elements.
DomButton	Represents the top-level container for a web page. It exposes the DOM tree through DomElement.
DomCheckBox	Represents all DOM elements that were specified using the <code>&lt;input type='checkbox'&gt;</code> tag.
DomForm	Represents all DOM elements that are specified using the <code>&lt;form&gt;</code> tag.
DomLink	Represents all DOM elements that were specified using the <code>&lt;a&gt;</code> tag.
DomListBox	Represents all DOM elements that were specified using the <code>&lt;select&gt;</code> tag.
DomRadioButton	Represents all DOM elements that were specified using the <code>&lt;input type='radio'&gt;</code> tag.
DomTable	Represents all DOM elements that were specified using the <code>&lt;table&gt;</code> tag.
DomTableRow	Represents all DOM elements that were specified using the <code>&lt;tr&gt;</code> tag.
DomTextField	Represents all DOM elements that were specified using one of the following tags: <ul style="list-style-type: none"><li>• <code>&lt;input type='text'&gt;</code></li><li>• <code>&lt;input type='password'&gt;</code></li><li>• <code>&lt;input type='file'&gt;</code></li><li>• <code>&lt;textarea&gt;</code></li></ul>

# Object Recognition for xBrowser Objects

The xBrowser technology domain supports dynamic object recognition.

Test cases use locator strings to find and identify objects. A typical locator includes a locator name and at least one locator attribute, such as  `"//LocatorName[@locatorAttribute='value']"`.

**Locator Names** With other technology types, such as Java SWT, locator names are created using the class name of the test object. With xBrowser, the tag name of the DOM element can also be used as locator name. The following locators describe the same element:

1. Using the tag name:  `"//a[@href='http://www.microfocus.com']"`
2. Using the class name:  `"//DomLink[@href='http://www.microfocus.com']"`

To optimize replay speed, use tag names rather than class names.

**Locator Attributes** All DOM attributes can be used as locator string attributes. For example, the element `<button automationid='123'>Click Me</button>` can be identified using the locator  `"//button[@automationid='123']"`.

**Recording Locators** Silk4NET uses a built-in locator generator when recording test cases and using the **Identify Object** dialog box. You can configure the locator generator to improve the results for a specific application.

## Page Synchronization for xBrowser

Synchronization is performed automatically before and after every method call. A method call is not started and does not end until the synchronization criteria is met.



**Note:** Any property access is not synchronized.

### Synchronization Modes

Silk4NET includes synchronization modes for HTML and AJAX.

Using the HTML mode ensures that all HTML documents are in an interactive state. With this mode, you can test simple Web pages. If more complex scenarios with Java script are used, it might be necessary to manually script synchronization functions, such as:

- `WaitForObject`
- `WaitForProperty`
- `WaitForDisappearance`
- `WaitForChildDisappearance`

The AJAX mode synchronization waits for the browser to be in a kind of idle state, which is especially useful for AJAX applications or pages that contain AJAX components. Using the AJAX mode eliminates the need to manually script synchronization functions (such as wait for objects to appear or disappear, wait for a specific property value, and so on), which eases the script creation process dramatically. This automatic synchronization is also the base for a successful record and playback approach without manual script adoptions.

### Troubleshooting

Because of the true asynchronous nature of AJAX, generally there is no real idle state of the browser. Therefore, in rare situations, Silk4NET will not recognize an end of the invoked method call and throws a timeout error after the specified timeout period. In these situations, it is necessary to set the synchronization mode to HTML at least for the problematic call.

 **Note:** Regardless of the page synchronization method that you use, in tests where a Flash object retrieves data from a server and then performs calculations to render the data, you must manually add a synchronization method to your test. Otherwise, Silk4NET does not wait for the Flash object to complete its calculations. For example, you might use `Thread.sleep(milliseconds)`.

Some AJAX frameworks or browser applications use special HTTP requests, which are permanently open in order to retrieve asynchronous data from the server. These requests may let the synchronization hang until the specified synchronization timeout expires. To prevent this situation, either use the HTML synchronization mode or specify the URL of the problematic request in the **Synchronization exclude list** setting.

Use a monitoring tool to determine if playback errors occur because of a synchronization issue. For instance, you can use FindBugs, <http://findbugs.sourceforge.net/>, to determine if an AJAX call is affecting playback. Then, add the problematic service to the **Synchronization exclude list**.

 **Note:** If you exclude a URL, synchronization is turned off for each call that targets the URL that you specified. Any synchronization that is needed for that URL must be called manually. For example, you might need to manually add `waitForObject` to a test. To avoid numerous manual calls, exclude URLs for a concrete target, rather than for a top-level URL, if possible.

## Configuring Page Synchronization Settings

You can configure page synchronization settings for each individual test or you can set global options that apply to all tests in the **Script Options** dialog box.

To add the URL to the exclusion filter, specify the URL in the **Synchronization exclude list** in the **Script Options** dialog box.

To configure individual settings for tests, record the test and then insert code to override the global playback value. For example, to exclude the time service, you might type:

```
'VB .NET code
Agent.SetOption("OPT_XBROWSER_SYNC_EXCLUDE_URLS",
Arrays.asList("timeService"))
```

```
// C# code
Agent.SetOption("OPT_XBROWSER_SYNC_EXCLUDE_URLS",
Arrays.asList("timeService"));
```

- OPT\_XBROWSER\_SYNC\_MODE
- OPT\_XBROWSER\_SYNC\_EXCLUDE\_URLS
- OPT\_SYNC\_TIMEOUT

## Comparing API Playback and Native Playback for xBrowser

Silk4NET supports API playback and native playback for Web applications. If your application uses a plug-in or AJAX, use native user input. If your application does not use a plug-in or AJAX, we recommend using API playback.

Advantages of native playback include:

- With native playback, the agent emulates user input by moving the mouse pointer over elements and pressing the corresponding elements. As a result, playback works with most applications without any modifications.
- Native playback supports plug-ins, such as Flash and Java applets, and applications that use AJAX, while high-level API recordings do not.

Advantages of API playback include:

- With API playback, the Web page is driven directly by DOM events, such as `onmouseover` or `onclick`.

- Scripts that use API playback do not require that the browser be in the foreground.
- Scripts that use API playback do not need to scroll an element into view before clicking it.
- Generally API scripts are more reliable since high-level user input is insensitive to pop-up windows and user interaction during playback.
- API playback is faster than native playback.

### Differences Between API and Native Playback Functions

The `DomElement` class provides different functions for API playback and native playback.

The following table describes which functions use API playback and which use native playback.

	API Playback	Native Playback
Mouse Actions	<code>DomClick</code>	<code>Click</code>
	<code>DomDoubleClick</code>	<code>DoubleClick</code>
	<code>DomMouseMove</code>	<code>MoveMouse</code>
		<code>PressMouse</code>
		<code>ReleaseMouse</code>
Keyboard Actions	not available	<code>TypeKeys</code>
Specialized Functions	<code>Select</code>	not available
	<code>SetText</code>	
	etc.	

## Setting Mouse Move Preferences

Specify whether mouse move actions are recorded for Web applications, Win32 applications, and Windows Forms applications that use mouse move events. You cannot record mouse move events for child domains of the xBrowser technology domain, for example Apache Flex and Swing.

1. Click **Silk4NET > Edit Options**.
2. Click the plus sign (+) next to **Record** in the **Options** menu tree. The **Record** options display in the right side panel.
3. Click **Recording**.
4. To record mouse move actions, check the `OPT_RECORD_MOUSEMOVES` option.  
Silk4NET will only record mouse move events that cause changes to the hovered element or its parent in order to keep scripts short.
5. If you record mouse move actions, in the **Record mouse move delay** text box, specify how many milliseconds the mouse has to be motionless before a `MoveMouse` action is recorded  
By default this value is set to 200.  
Mouse move actions are only recorded if the mouse stands still for this time. A shorter delay will result in more unexpected move mouse actions, a longer delay will require you to keep the mouse still to record an action.
6. Click **OK**.

## Browser Configuration Settings for xBrowser

Several browser settings help to sustain stable test executions. Although Silk4NET works without changing any settings, there are several reasons that you might want to change the browser settings.

**Increase replay speed** Use `about:blank` as home page instead of a slowly loading Web page.

**Avoid unexpected behavior of the browser**

- Disable pop up windows and warning dialog boxes.
- Disable auto-complete features.
- Disable password wizards.

**Prevent malfunction of the browser** Disable unnecessary third-party plugins.

The following sections describe where these settings are located in the corresponding browser.

### Internet Explorer

The browser settings are located at **Tools > Internet Options**. The following table lists options that you might want to adjust.

Tab	Option	Configuration	Comments
General	Home page	Set to <code>about:blank</code> .	Minimize start up time of new tabs.
General	Tabs	<ul style="list-style-type: none"> <li>• Disable warning when closing multiple tabs.</li> <li>• Enable to switch to new tabs when they are created.</li> </ul>	<ul style="list-style-type: none"> <li>• Avoid unexpected dialog boxes.</li> <li>• Links that open new tabs might not replay correctly otherwise.</li> </ul>
Privacy	Pop-up blocker	Disable pop up blocker.	Make sure your Web site can open new windows.
Content	AutoComplete	Turn off completely	<ul style="list-style-type: none"> <li>• Avoid unexpected dialog boxes.</li> <li>• Avoid unexpected behavior when typing keys.</li> </ul>
Programs	Manage add-ons	Only enable add-ons that are absolutely required.	<ul style="list-style-type: none"> <li>• Third-party add-ons might contain bugs.</li> <li>• Possibly not compatible to Silk4NET.</li> </ul>
Advanced	Settings	<ul style="list-style-type: none"> <li>• Disable <b>Automatically check for Internet Explorer updates</b>.</li> <li>• Enable <b>Disable script debugging (Internet Explorer)</b>.</li> <li>• Enable <b>Disable script debugging (Other)</b>.</li> <li>• Disable <b>Enable automatic crash recovery</b>.</li> <li>• Disable <b>Display notification about every script error</b>.</li> <li>• Disable all <b>Warn ...</b> settings</li> </ul>	Avoid unexpected dialog boxes.



**Note:** Recording a Web application in Internet Explorer with a zoom level different to 100% might not work as expected. Before recording actions against a Web application in Internet Explorer, set the zoom level to 100%.

### Mozilla Firefox

You do not have to change browser settings for Mozilla Firefox. Silk4NET automatically starts Mozilla Firefox with the appropriate command-line parameters.



**Note:** To avoid unexpected behavior when testing web applications, disable auto updates for Mozilla Firefox. For additional information, see [Stop automatic updates](#).

## Google Chrome

You do not have to change browser settings for Google Chrome. Silk4NET automatically starts Google Chrome with the appropriate command-line parameters.



**Note:** To avoid unexpected behavior when testing web applications, disable auto updates for Google Chrome. For additional information, see [Turning Off Auto Updates in Google Chrome](#).

## Configuring the Locator Generator for xBrowser

The Open Agent includes a sophisticated locator generator mechanism that guarantees locators are unique at the time of recording and are easy to maintain. Depending on your application and the frameworks that you use, you might want to modify the default settings to achieve the best results.

A well-defined locator relies on attributes that change infrequently and therefore requires less maintenance. Using a custom attribute is more reliable than other attributes like caption or index, since a caption will change when you translate the application into another language, and the index might change when another object is added.

To achieve optimal results, add a custom automation ID to the elements that you want to interact with in your test. In Web applications, you can add an attribute to the element that you want to interact with, such as `<div myAutomationId="my unique element name" />`. This approach can eliminate the maintenance associated with locator changes.

1. Click **Silk4NET > Edit Options** and then click the **Custom Attributes** tab.
2. If you use custom automation IDs, from the **Select a TechDomain** list box, select **xBrowser** and then add the IDs to the list.

The custom attributes list contains attributes that are suitable for locators. If custom attributes are available, the locator generator uses these attributes before any other attribute. The order of the list also represents the priority in which the attributes are used by the locator generator. If the attributes that you specify are not available for the objects that you select, Silk4NET uses the default attributes for xBrowser.

3. Click the **Browser** tab.
4. In the **Locator attribute name exclude list** grid, type the attribute names to ignore while recording.

For example, use this list to specify attributes that change frequently, such as size, width, height, and style. You can include the wildcards `*` and `?` in the Locator attribute name blacklist.

Separate attribute names with a comma.

5. In the **Locator attribute value exclude list** grid, type the attribute values to ignore while recording.

Some AJAX frameworks generate attribute values that change every time the page is reloaded. Use this list to ignore such values. You can also use wildcards in this list.

Separate attribute values with a comma.

6. Click **OK**.

You can now record or manually create a test case.

## Connection String for a Remote Desktop Browser

The *connection string* specifies the remote desktop browser that is used for testing. When testing a web application in a remote browser, Silk4NET uses the connection string to connect to the remote location. The connection string is typically part of the application configuration. You can set the connection string when you configure the web application that you want to test. To change the connection string, you can use the **Edit Application Configuration** dialog box.

When testing a web application in a remote browser, the connection string includes only the host, which means the IP address or the host name of the remote machine, for example 10.0.0.1. To select the correct browser, Silk4NET uses the connection string in combination with the browser type, which you can also specify in the **Edit Application Configuration** dialog box.

The host name is case-insensitive.



**Note:** Remote desktop browser testing is only supported for Microsoft Edge on a remote Microsoft Windows machine, and for Apple Safari on a remote Mac.

#### Connection string example

```
"host=10.0.0.1"
```

## Testing with Apple Safari on a Mac

This section describes how you can enhance your cross-browser test set by testing Apple Safari on Mac machines that are connected to a Windows machine on which Silk4NET is installed.

### Prerequisites for Testing with Apple Safari on a Mac

Before you can test with Apple Safari on a Mac, ensure that the following prerequisites are met:

- The Mac is connected as a remote location to a Windows machine, on which Silk4NET is installed. For additional information, see *Editing Remote Locations*.
- The SafariDriver, which is the WebDriver extension for Apple Safari that inverts the traditional client/server relationship and communicates with the WebDriver client using WebSockets, is installed on the Mac.
- Java JDK is installed on the Mac.
- The information service is installed on the Mac. To get the files that are required for the information service, use the Silk Test installer. For additional information, see [Installing the Silk Test Information Service on a Mac](#).
- To run tests on Apple Safari, the user that has installed the information service needs to be logged in on the Mac.



**Tip:** Micro Focus recommends to set the Mac to automatically log in the correct user during startup. For additional information, see [Set your Mac to automatically log in during startup](#).

### Installing the Silk Test Information Service on a Mac



**Note:** To install the information service on a Mac, you require administrative privileges on the Mac.

To create and execute tests against Apple Safari on a Mac, or against mobile applications on an iOS or Android device that is connected to a Mac, install the Silk Test information service (information service) on the Mac, and then use the **Remote Locations** dialog box to connect a Windows machine, on which Silk4NET is installed, to the Mac.

To install the information service on a Mac:

1. Ensure that a Java JDK is installed on the Mac.
2. If you want to test mobile applications on an iOS device, ensure that Xcode is installed on the Mac.
3. Access the information service setup file, `SilkTestInformationService<Version>-<Build Number>.pkg`.
  - If you have downloaded the information service setup file while installing Silk Test, open the folder `macOS` in the Silk Test installation directory, for example `C:\Program Files (x86)\Silk\SilkTest`.

- If you have not downloaded the information service setup file while installing Silk Test, you can download the setup file from [Micro Focus SupportLine](#).
4. Copy the file `SilkTestInformationService<Version>-<Build Number>.pkg` to the Mac.
  5. Execute `SilkTestInformationService<Version>-<Build Number>.pkg` to install the information service.
  6. Follow the instructions in the installation wizard.
  7. When asked for the password, provide the password of the currently signed in Mac user.
  8. When Apple Safari opens and a message box asks whether to trust the SafariDriver, click **Trust**.

To complete the installation, the installer logs the current Mac user out. To verify that the information service was installed correctly, log in to the Mac and click on the Silk Test icon in the top-right corner of the screen to see the available devices and browsers.



**Tip:** If the Silk Test icon does not appear, restart the Mac.

## Limitations for Testing with Apple Safari

The following are the known limitations for testing with Apple Safari on a Mac:

- The following classes, interfaces, methods, and properties are currently not supported when testing web applications with Apple Safari on a Mac:
  - `BrowserApplication` class.
    - `ClearCache` method
    - `CloseOtherTabs` method
    - `CloseTab` method
    - `ExistsTab` method
    - `GetHorizontalScrollbar` method
    - `GetNextCloseWindow` method
    - `GetSelectedTab` method
    - `GetSelectedTabIndex` method
    - `GetSelectedTabName` method
    - `GetTabCount` method
    - `GetVerticalScrollbar` method
    - `IsActive` method
    - `Minimize` method
    - `OpenContextMenu` method
    - `OpenTab` method
    - `Restore` method
    - `SelectTab` method
    - `SetActive` method
    - `WindowState` property
  - `BrowserWindow` class.
    - `AcceptAlert` method
    - `DismissAlert` method
    - `GetAlertText` method
    - `IsAlertPresent` method
    - `MouseMove` method
    - `PressKeys` method
    - `PressMouse` method

- ReleaseKeys method
- ReleaseMouse method
- IMoveable class.
  - GetFocusmethod.
- Silk4NET does not support testing Apache Flex.
- Silk4NET does not support testing iframes with a JavaScript source on Apple Safari.
- To test secure web applications over HTTPS on Apple Safari, ensure that any required server certificates are trusted.
- Silk4NET does not provide native support for Apple Safari. You cannot test internal Apple Safari functionality. For example, in a test, you cannot change the currently displayed web page by adding text to the navigation bar. As a workaround, you can use API calls to navigate between web pages.
- Silk4NET does not support JavaScript dialog API functions for Apple Safari. As a workaround, you could patch such functions so that they are ignored. For additional information, see <https://groups.google.com/forum/#!topic/selenium-developer-activity/qsovJw93g9c>.
- Silk4NET does not support text recognition with Apple Safari.

Text recognition includes the following methods:

- TextCapture
- TextClick
- TextExists
- TextRectangle
- Silk4NET does not support tabbing on Apple Safari.
- To test a multi window application, disable the Apple Safari pup-up blocker. To do so, start Apple Safari and navigate to **Safari Preferences > Security > Block pop-up window**.
- Silk4NET does not support testing the dialog box for saving a password. To avoid this dialog box, start Apple Safari, navigate to **Safari Preferences > AutoFill**, and check the **User names and passwords** check box.
- Silk4NET does not support properties in XPath expressions for Apple Safari. Only attributes are supported in XPath expressions.
- Silk4NET does not support testing web applications which include a Content-Security-Policy HTTP header.

## Running Multiple Apple Safari Tests at the Same Time

To execute a test on Apple Safari, you require a Mac that is connected to the Windows machine on which Silk Testis installed. If multiple Apple Safari want to execute tests on Apple Safari, these tests can be executed simultaneously on the same Mac.



**Note:** Each test that is executed against Apple Safari on the Mac opens an individual instance of Apple Safari. Having too many instances of Apple Safari running simultaneously might reduce the performance of the Mac.

## Uninstalling the Silk Test Information Service from a Mac

To uninstall the Silk Test information service (information service) from a Mac, for example if you no longer want to execute tests against Apple Safari on the Mac:

1. Create a new shell file, for example `uninstallInfoService.sh`.
2. Type the following code into the new file:

```
#!/bin/sh

if launchctl list | grep com.borland.infoservice ; then
  launchctl unload /Library/LaunchAgents/com.borland.infoservice.plist
  echo "unloading Launch Daemon"
fi
```

```
if [ -d "/Applications/Silk" ]
then
sudo rm -rf /Applications/Silk
fi

if [ -f "/Library/LaunchAgents/com.borland.infoservice.plist" ]
then
sudo rm /Library/LaunchAgents/com.borland.infoservice.plist
fi

if [ -f "/usr/local/bin/ideviceinstaller" ]
then
sudo rm /usr/local/bin/ideviceinstaller
fi

exit 0
```

3. In the command line, type `chmod +x uninstallInfoService.sh` to make the shell file executable.
4. Execute the shell file from the command line.

## Testing with Google Chrome

This section describes how you can enhance your cross-browser test set by testing with Google Chrome.

Silk4NET supports recording actions and replaying tests on Google Chrome 50 or later, and supports replaying tests and recording locators on Google Chrome versions prior to version 50.

- When starting to test on Google Chrome 50 or later, with no running instance of Google Chrome open, Silk4NET starts a new instance of Google Chrome. This new browser uses a temporary profile without add-ons and with an empty cache.
- When starting to test on an instance of Google Chrome 50 or later, which is already running, Silk4NET restarts Google Chrome with the same command line arguments that were used when the instance was initially started. This restart is required to enable the Silk4NET automation support.
- When testing with Google Chrome 50 or later, the Google Chrome instance is closed when shutting down the Open Agent or when starting to test another application outside Google Chrome.



**Tip:** If you want to execute an existing test script with Google Chrome 50 or later, Micro Focus recommends that you use a base state or that you add a command to the test script to navigate to the URL.

### Example 1

If the running instance of Google Chrome 50 or later was initially started with the command `C:/Program Files (x86)/Google/Chrome/Application/chrome.exe www.borland.com`, Google Chrome opens to *www.borland.com* after the restart.

### Example 2

If the running instance of Google Chrome 50 or later was initially started with the command `C:/Program Files (x86)/Google/Chrome/Application/chrome.exe`, Google Chrome opens to *about:blank* after the restart.

# Prerequisites for Replaying Tests with Google Chrome

## Command-line parameters

When you use Google Chrome to replay a test or to record locators, Google Chrome is started with the following command:

```
%LOCALAPPDATA%\Google\Chrome\Application\chrome.exe
--enable-logging
--log-level=1
--disable-web-security
--disable-hang-monitor
--disable-prompt-on-repost
--dom-automation
--full-memory-crash-report
--no-default-browser-check
--no-first-run
--homepage=about:blank
--disable-web-resources
--disable-preconnect
--enable-logging
--log-level=1
--safebrowsing-disable-auto-update
--test-type=ui
--noerrdialogs
--metrics-recording-only
--allow-file-access-from-files
--disable-tab-closeable-state-watcher
--allow-file-access
--disable-sync
--testing-channel=NamedTestingInterface:st_42
```

When you use the wizard to hook on to an application, these command-line parameters are automatically added to the base state. If an instance of Google Chrome is already running when you start testing, without the appropriate command-line parameters, closes Google Chrome and tries to restart the browser with the command-line parameters. If the browser cannot be restarted, an error message displays.



**Note:** The command-line parameter `disable-web-security` is required when you want to record or replay cross-domain documents.



**Note:** To test a web application that is stored in the local file system, navigate to the `chrome://extensions` in Google Chrome and check the **Allow access to file URLs** check box for the **Silk Test Chrome Extension**.

## Testing Google Chrome Extensions

You can use one of the following two approaches to test a Google Chrome extension (add-on) with Silk4NET:

### Install the extension as a .crx file when starting Google Chrome

To test a Google Chrome extension that is installed as a .crx file, add the following command line to the base state:

```
chrome.exe --load-extension=C:/myExtension/myExtension.crx
```



**Note:** You can only install a single extension in Google Chrome as a .crx file. To install multiple extensions in Google Chrome, use a comma separated list of .crx files. For example:

```
chrome.exe --load-extension=C:/myExtension/
myExtension.crx,C:/myExtension2/myExtension2.crx
```

**Add the extension to a profile** Add the extension to a Google Chrome user data directory and use that profile for testing. For additional information, see [Testing Google Chrome with User Data Directories](#).

## Testing Google Chrome with User Data Directories

All changes that you make in Google Chrome, for example your home page, what toolbars you use, any saved passwords, and your bookmarks, are all stored in a special folder, which is called a user data directory.

With Silk4NET, you can test Google Chrome user data directories by specifying the path to the user data directory in the base state of the application under test. The following command line includes the path to the profile:

```
chrome.exe --user-data-dir="C:/Users/MyUser/AppData/Local/Google/Chrome/User Data"
```



**Note:** When Google Chrome is started by Silk4NET, an empty user data directory is used. This ensures that the test starts at a clean state.

## Limitations for Testing with Google Chrome

The support for playing back tests and recording locators with Google Chrome is not as complete as the support for the other supported browsers. The following list lists the known limitations for playing back tests and recording locators with Google Chrome:

- Silk4NET does not support recording a test on multiple Google Chrome windows.
- Silk Test does not support testing child technology domains of the xBrowser domain with Google Chrome. For example Apache Flex or Microsoft Silverlight are not supported with Google Chrome.
- With Google Chrome 49 or prior, Silk Test does not provide native support for Google Chrome. You cannot test internal Google Chrome functionality. For example, in a test, you cannot change the currently displayed Web page by adding text to the navigation bar through Win32. As a workaround, you can use API calls to navigate between Web pages. Silk Test supports handling alerts and similar dialog boxes through the Alerts API.
- Silk4NET does not support text recognition with Google Chrome.

Text recognition includes the following methods:

- `TextCapture`
- `TextClick`
- `TextExists`
- `TextRectangle`
- Silk4NET does not support the `GetFocus` method of the `IMoveable` class.
- Silk Test does not recognize opening the **Print** dialog box in Google Chrome by using the Google Chrome menu. To add opening this dialog box in Google Chrome to a test, you have to send **Ctrl+Shift+P** using the `TypeKeys` method. Internet Explorer does not recognize this shortcut, so you have to first record your test in Internet Explorer, and then manually add pressing **Ctrl+Shift+P** to your test.
- When two Google Chrome windows are open at the same time and the second window is detached from the first one, Silk Test does not recognize the elements on the detached Google Chrome window. However, Silk Test recognizes the elements of any Google Chrome window that is opened by the AUT during replay.
- With Google Chrome 49 or prior and when you want to test a web application with Google Chrome and the **Continue running background apps when Google Chrome is closed** check box is checked, Silk Test cannot restart Google Chrome to load the automation support.
- To replay a test with a Google Chrome version prior to 50, you need to perform one of the following:
  - Start Google Chrome and enable the Silk Test Chrome extension.



**Note:** If by mistake you have disabled the Silk Test Chrome extension, you have to re-install the extension from the [Chrome Web Store](#).

- If enabling the Silk Test Chrome extension is not possible, because you have no access to the Chrome Web Store, remove the registry key `HKEY_LOCAL_MACHINE\SOFTWARE\[Wow6432Node\]Google\Chrome\Extensions\cjkicfagnoafgjgpnpcdfllcnneidjj`:
  1. In the **Start** menu, type `regedit` into the search box and press **Enter**.
  2. In the **Registry Editor**, navigate to `HKEY_LOCAL_MACHINE\SOFTWARE\[Wow6432Node\]Google\Chrome\Extensions`.
  3. Right click `cjkicfagnoafgjgpnpcdfllcnneidjj` and select **Delete**.
- With Google Chrome 49 or prior and when using Internet Explorer to replay a test, you can use the following code to test `executeJavaScript`:

```
// Java code
desktop.<BrowserWindow> find("//BrowserWindow")
    .executeJavaScript("function foo() { alert('Silk Test'); }");
desktop.<BrowserWindow> find("//BrowserWindow")
    .executeJavaScript("foo();");
```

When replaying tests on Google Chrome, the scripts are not executed in the global context (window), but in a closure. Everything is executed within a function. The first `ExecuteJavaScript` call in the previous code sample will not work with Google Chrome, because the function `foo` is only available as long as the `ExecuteJavaScript` call lasts.

To replay the same test on Google Chrome, you can use the following function expression:

```
// Java code
desktop.<BrowserWindow> find("//BrowserWindow")
    .executeJavaScript("window.foo = function() { alert('Silk Test'); }");
desktop.<BrowserWindow> find("//BrowserWindow")
    .executeJavaScript("window.foo();");
```

The previous code samples will work in Silk4J. The code for the other Silk Test clients is similar. For additional information, refer to the documentation of the `ExecuteJavaScript` method in the Help of your Silk Test client.



**Note:** If the Silk Test Chrome extension symbol is marked red, this indicates an error with the Silk Test Chrome support.

## Testing with Mozilla Firefox

This section describes how you can enhance your cross-browser test set by testing with Mozilla Firefox.

Silk4NET supports recording actions and replaying tests on Mozilla Firefox.

- When starting to test on Mozilla Firefox, with no running instance of Mozilla Firefox open, Silk4NET starts a new instance of Mozilla Firefox. This new browser uses a temporary profile without add-ons and with an empty cache.
- When starting to test on an instance of Mozilla Firefox which is already running, Silk4NET restarts Mozilla Firefox with the same command line arguments that were used when the instance was initially started. This restart is required to enable the Silk4NET automation support.
- The Mozilla Firefox instance is closed when shutting down the Open Agent or when starting to test another application outside Mozilla Firefox.



**Tip:** If you want to execute an existing test script with Mozilla Firefox, Micro Focus recommends that you use a base state or that you add a command to the test script to navigate to the URL.

### Example 1

If the running instance of Mozilla Firefox was initially started with the command `C:\program files\Mozilla/firefox.exe www.borland.com`, Mozilla Firefox opens to `www.borland.com` after the restart.

### Example 2

If the running instance of Mozilla Firefox was initially started with the command `C:\program files\Mozilla/firefox.exe`, Mozilla Firefox opens to *about:blank* after the restart.

## Testing Mozilla Firefox with Profiles

All changes that you make in Mozilla Firefox, for example your home page, what toolbars you use, any saved passwords, and your bookmarks, are all stored in a special folder, which is called a profile.

With Silk4NET, you can test Mozilla Firefox profiles by specifying either the name of the profile or the path to the profile in the base state of the application under test.

### Using the name of the profile

You can use the name of the profile to specify the profile in a command line argument that you can add to the base state of the web application that you want to test. The following command line includes the name of the profile:

```
firefox.exe -p myProfile
```

You can configure the named profile in the **Profile Manager**. To start the **Profile Manager**, type `firefox.exe -P` into a command window.

### Using the path to the profile

You can use the path to the profile to specify the profile in a command line argument that you can add to the base state of the web application that you want to test. The following command line includes the path to the profile:

```
firefox.exe -profile C:/<path to profile folder>
```



**Note:** If Mozilla Firefox is started by Silk4NET, an empty profile is used. This ensures that the test starts at a clean state. If the user manually starts Mozilla Firefox, the default profile is used.

## Testing Mozilla Firefox Extensions

You can use one of the following two approaches to test a Mozilla Firefox extension (add-on) with Silk4NET:

### Install the extension as a .xpi file when starting Mozilla Firefox

To test a Mozilla Firefox extension that is installed as a .xpi file, add the following command line to the base state:

```
firefox.exe C:/myExtension/myExtension.xpi
```



**Note:** When starting Mozilla Firefox from the base state, the confirmation dialog that is by default shown by Mozilla Firefox when installing the extension is suppressed.

Testing a Mozilla Firefox extension that is installed as a .xpi file with Silk4NET has the following limitations:

- The .xpi file must exist in the local file system.
- You can only install a single extension in Mozilla Firefox as a .xpi file. To install multiple extensions in Mozilla Firefox, add the extensions to a Mozilla Firefox profile.

### Add the extension to a Mozilla Firefox profile

Add the extension to a Mozilla Firefox profile and use that profile for testing. For additional information, see [Testing Mozilla Firefox with Profiles](#).

## Limitations for Testing with Mozilla Firefox

The following limitations are known when testing web applications with Silk4NET on Mozilla Firefox:

- Silk4NET does not support Mozilla Firefox 47. However, Silk4NET supports Mozilla Firefox 47.0.1
- Silk4NET does not support recording a test on multiple Mozilla Firefox windows.
- Silk4NET does not support testing modal browser windows, which are windows that can be displayed with the `window.showModalDialog` command. These modal browser windows have been officially deprecated, and are disabled with Google Chrome 37 or later, while they are planned to no longer be supported in future versions of Mozilla Firefox. You can work around this issue by using low-level actions, for example native clicks with coordinates to click on an object or typekeys to fill out text fields.
- Silk4NET does not support testing Silverlight with Mozilla Firefox.
- Silk4NET does not support testing some browser dialogs, for example the **About** dialog, with Mozilla Firefox.
- Silk4NET does not support testing `about:*` pages with Mozilla Firefox.
- Silk4NET does not support text recognition with Mozilla Firefox.

Text recognition includes the following methods:

- `TextCapture`
- `TextClick`
- `TextExists`
- `TextRectangle`
- Silk4NET does not support recording locators on JavaScript alert boxes with Mozilla Firefox. You can work around this issue by manually scripting the locators. For example, to click on the button **OK**, which has the locator `//PushButton[@caption='OK']`, type the following into your script:

```
// VB .NET code
_desktop.PushButton("@caption='OK'").Click()
```

```
// C# code
_desktop.PushButton("@caption='OK'").Click();
```

- Silk4NET does not support Java applets for Mozilla Firefox 48 or later. Silk4NET supports Java applets for Mozilla Firefox 47.0.1 or prior with the following limitations:
  - Silk4NET does not support the locator `//AppletContainer`.
  - When the applet opens a modal dialog, a locator similar to `//BrowserApplication//BrowserWindow/JDialog[@caption='Information']//JButton[@caption='OK']` might not work. You can use a locator like `//JDialog[@caption='Information']//JButton[@caption='OK']` instead.
- Silk4NET does not support properties in XPath expressions for Mozilla Firefox. Only attributes are supported in XPath expressions.
- Silk4NET does not support the `GetFocus` method of the `IMoveable` class.
- Silk4NET does not support testing applications that are based on Apache Flex.
- With Mozilla Firefox 48 or later, the `PressKey` method and the `ReleaseKey` method are not supported.
- With Mozilla Firefox 48 or later, the `MouseMove` method of the `BrowserWindow` class is not supported. Silk Test uses the `DomMouseMove` method instead.
- With Mozilla Firefox 48 or later, native playback for the following is not supported:
  - The `Click` method with coordinates. Native playback for this method is simulated with JavaScript. Whenever possible, Micro Focus recommends using `Click` without coordinates.
  - Double-click.
  - Right and middle mouse button click.
- With Mozilla Firefox 48 or later, the following limitations apply to alert windows:
  - The `AcceptAlert` method with a `text` parameter is not supported.
  - The `DomClick` method is not supported on controls that open an alert.

# Testing with Microsoft Edge

This section describes how you can enhance your cross-browser test set by testing with Microsoft Edge.

## Limitations for Testing with Microsoft Edge

The following are the known limitations for testing with Microsoft Edge:

- The following classes, interfaces, methods, and properties are currently not supported when testing web applications on Microsoft Edge:
  - `BrowserApplication` class.
    - `ClearCache` method
    - `CloseOtherTabs` method
    - `CloseTab` method
    - `ExistsTab` method
    - `GetHorizontalScrollbar` method
    - `GetNextCloseWindow` method
    - `GetSelectedTab` method
    - `GetSelectedTabIndex` method
    - `GetSelectedTabName` method
    - `GetTabCount` method
    - `GetVerticalScrollbar` method
    - `IsActive` method
    - `Minimize` method
    - `OpenContextMenu` method
    - `OpenTab` method
    - `Restore` method
    - `SelectTab` method
    - `SetActive` method
    - `WindowState` method
  - The following methods of the `BrowserWindow` class are not supported for Microsoft Edge versions prior to build 38.14393, the Microsoft Edge version for Microsoft Windows 10 Anniversary Update.
    - `PressKeys` method
    - `ReleaseKeys` method
- Silk4NET does not automatically bring the browser into the foreground when recording actions against Microsoft Edge.
- When testing with Microsoft Edge, the rectangle for the `BrowserApplication` is not absolute.
- Silk4NET does not support testing Apache Flex.
- Silk4NET does not provide native support for Microsoft Edge. You cannot test internal Microsoft Edge functionality. For example, in a test, you cannot change the currently displayed web page by adding text to the navigation bar. As a workaround, you can use API calls to navigate between web pages.
- Silk4NET does not support handling alerts and similar dialog boxes for Microsoft Edge.
- Image clicks are only supported for Microsoft Edge Threshold 2 (build 25.10586) or later. If you are testing a web application on a prior version of Microsoft Edge, you can only use image verifications.
- Silk4NET does not support text recognition with Microsoft Edge.

Text recognition includes the following methods:

- `TextCapture`
- `TextClick`

- `TextExists`
- `TextRectangle`
- Silk4NET does not support tabbing on Microsoft Edge. Tabs are recognized as windows.
- When testing web applications on Microsoft Edge, Silk4NET cannot locate meta-tags which include the `http-equiv` attribute. For example, Silk4NET cannot locate the following meta-tag:
 

```
<meta http-equiv="content-type" content="text/html; charset=utf-8">
```
- With Microsoft Edge, Silk4NET does not support directly reading the `currentStyle` attribute of a DOM element. You can use the `GetCssStyle` method of the `DomElement` class to retrieve the computed CSS style with the specified style name.
- When starting the interaction with a web application on Microsoft Edge, Silk4NET closes any open instance of Microsoft Edge and starts a new browser. This new browser uses a temporary profile without add-ons and with an empty cache. This instance of Microsoft Edge is closed when shutting down the Open Agent or when starting to test another application outside Microsoft Edge.
- With Microsoft Edge, Silk4NET does not recognize the `textContent` attribute while recording actions or locators. However, you can use the `textContent` attribute in object maps and when replaying a test on Microsoft Edge.
- Silk4NET does not support properties in XPath expressions for Microsoft Edge. Only attributes are supported in XPath expressions.
- Silk4NET does not support the `GetFocus` method of the `IMoveable` class.
- Silk4NET does not support testing web applications which include a Content-Security-Policy HTTP header.

## Testing Microsoft Edge on a Remote Machine

To test Microsoft Edge on a remote Microsoft Windows 10 machine, Silk4NET needs to be installed on the remote machine.

1. On the local machine, from which you want to test Microsoft Edge, add the remote Microsoft Windows 10 machine as a remote location.  
For additional information, see [Editing Remote Locations](#).
2. If the Silk Test information service is already running with administrator privileges on the remote Microsoft Windows 10 machine, disable the Silk Test information service.
  - a) Sign in to the Microsoft Windows 10 machine as an administrator.
  - b) Open the **Control Panel** (icons view).
  - c) Click **Administrative Tools**.
  - d) Double-click **Services**.
  - e) Double click on the Silk Test information service.
  - f) If the service shows a status of running, click **Stop** and wait until the service status shows as stopped.
  - g) Change the **Startup type** to **Disabled**.
  - h) Click **OK**.
3. Ensure that the Silk Test information service is running in a user session, and not in the services session. The Silk Test information service requires UI interaction to be enabled. The services session, which is session 0, does not enable UI interaction.
4. Start the Silk Test information service with medium integrity level, which means without administrator privileges.
  - a) Open a file explorer and navigate to `%OPEN_AGENT_HOME%/InfoService`.  
For example, `C:\Program Files (x86)\Silk\SilkTest\ng\InfoService`.
  - b) Double-click `infoservice_start.bat`.
5. You can now select Microsoft Edge on the remote Microsoft Windows 10 machine in the **Select Application** dialog box.

# Cross-Browser Testing: Frequently Asked Questions

This section includes questions that you might encounter when testing your Web application on various browsers.

## Dialog is Not Recognized During Replay

When recording a script, Silk4NET recognizes some windows as `Dialog`. If you want to use such a script as a cross-browser script, you have to replace `Dialog` with `Window`, because some browsers do not recognize `Dialog`.

For example, the script might include the following line:

```
/BrowserApplication//Dialog//PushButton[@caption='OK']
```

Rewrite the line to enable cross-browser testing to:

```
/BrowserApplication//Window//PushButton[@caption='OK']
```

## DomClick(x, y) Is Not Working Like Click(x, y)

If your application uses the `onclick` event and requires coordinates, the `DomClick` method does not work. Try to use `Click` instead.

## FileInputField.DomClick() Will Not Open the Dialog

Try to use `Click` instead.

## How can I scroll in a browser?

Silk4NET provides the following ways to scroll controls in a browser into view during replay:

**ExecuteJavaScript method (DomElement)**

Use the `ScrollIntoView` method to scroll a specific DOM element into the visible area of the browser window.

**ExecuteJavaScript method (BrowserWindow)**

Use the `ExecuteJavaScript` method to scroll the entire page up or down by a specified range.

### Examples

The following command scrolls one page down:

```
'VB .NET code  
browserWindow.ExecuteJavaScript("window.scrollTo(0, window.innerHeight)")
```

```
// C# code  
browserWindow.ExecuteJavaScript("window.scrollTo(0, window.innerHeight)");
```

The following command scrolls down 100 pixels:

```
'VB .NET code  
browserWindow.ExecuteJavaScript("window.scrollTo(0, 100)")
```

```
// C# code  
browserWindow.ExecuteJavaScript("window.scrollTo(0, 100)");
```

The following command scrolls up 100 pixels:

```
'VB .NET code
browserWindow.ExecuteJavaScript("window.scrollTo(0, -100)")

// C# code
browserWindow.ExecuteJavaScript("window.scrollTo(0, -100)");
```

## How Can I See Which Browser I Am Currently Using?

The `BrowserApplication` class provides a property `"browserType"` that returns the type of the browser. You can add this property to a locator in order to define which browser it matches.

For information about new features, supported platforms, and tested versions, refer to the [Release Notes](#).

### Examples

To get the browser type, type the following into the locator:

```
browserApplication.GetProperty("browserType")
```

Additionally, the `BrowserWindow` provides a method `GetUserAgent` that returns the user agent string of the current window.

## How do I Verify the Font Type Used for the Text of an Element?

You can access all attributes of the `currentStyle` attribute of a DOM element by separating the attribute name with a ":".

**Internet Explorer 8 or earlier**

```
wDomElement.GetProperty("currentStyle:fontName")
```

**All other browsers, for example  
Internet Explorer 9 or later and  
Mozilla Firefox**

```
wDomElement.GetProperty("currentStyle:font-name")
```

## I Configured `innerText` as a Custom Class Attribute, but it Is Not Used in Locators

A maximum length for attributes used in locator strings exists. `InnerText` tends to be lengthy, so it might not be used in the locator. If possible, use `textContent` instead.

## I Need Some Functionality that Is Not Exposed by the `xBrowser` API. What Can I Do?

You can use `ExecuteJavaScript()` to execute JavaScript code directly in your Web application. This way you can build a workaround for nearly everything.

## `Link.Select` Does Not Set the Focus for a Newly Opened Window in Internet Explorer

This is a limitation that can be fixed by changing the Browser Configuration Settings. Set the option to always activate a newly opened window.

## Logging Output of My Application Contains Wrong Timestamps

This might be a side effect of the synchronization. To avoid this problem, specify the HTML synchronization mode.

## My Test Script Hangs After Navigating to a New Page

This can happen if an AJAX application keeps the browser busy (open connections for Server Push / ActiveX components). Try to set the HTML synchronization mode. Check the *Page Synchronization for xBrowser* topic for other troubleshooting hints.

## Recorded an Incorrect Locator

The attributes for the element might change if the mouse hovers over the element. Silk4NET tries to track this scenario, but it fails occasionally. Try to identify the affected attributes and configure Silk4NET to ignore them.

## Rectangles Around Elements in Internet Explorer are Misplaced

- Make sure the zoom factor is set to 100%. Otherwise, the rectangles are not placed correctly.
- Ensure that there is no notification bar displayed above the browser window. Silk4NET cannot handle notification bars.

## The Move Mouse Setting Is Turned On but All Moves Are Not Recorded. Why Not?

In order to not pollute the script with a lot of useless `MoveMouse` actions, Silk4NET does the following:

- Only records a `MoveMouse` action if the mouse stands still for a specific time.
- Only records `MoveMouse` actions if it observes activity going on after an element was hovered over. In some situations, you might need to add some manual actions to your script.
- Silk4NET supports recording mouse moves only for Web applications, Win32 applications, and Windows Forms applications. Silk4NET does not support recording mouse moves for child technology domains of the xBrowser technology domain, for example Apache Flex and Swing.

## What is the Difference Between `textContent`, `innerText`, and `innerHTML`?

- `textContent` is all text contained by an element and all its children that are for formatting purposes only.
- `innerText` returns all text contained by an element and all its child elements.
- `innerHTML` returns all text, including html tags, that is contained by an element.

Consider the following html code.

```
<div id="mylinks">
  This is my <b>link collection</b>:
  <ul>
    <li><a href="www.borland.com">Bye bye <b>Borland</b> </a></li>
    <li><a href="www.microfocus.com">Welcome to <b>Micro Focus</b></a></li>
  </ul>
</div>
```

The following table details the different properties that return.

Code	Returned Value
<pre>browser.DomElement("//div[@id='mylinks']").GetProperty("textContent")</pre>	This is my link collection:

Code	Returned Value
<pre>browser.DomElement("// div[@id='mylinks']").GetProperty("innerText")</pre>	<pre>This is my link collection:Bye bye Borland Welcome to Micro Focus</pre>
<pre>browser.DomElement("// div[@id='mylinks']").GetProperty("innerHTML")</pre>	<pre>This is my &lt;b&gt;link collection&lt;/b&gt;: &lt;ul&gt;   &lt;li&gt;&lt;a href="www.borland.com"&gt;Bye bye   &lt;b&gt;Borland&lt;/b&gt;&lt;/a&gt;&lt;/li&gt;   &lt;li&gt;&lt;a href="www.microfocus.com"&gt;Welcome to   &lt;b&gt;Micro Focus&lt;/b&gt;&lt;/a&gt;&lt;/li&gt; &lt;/ul&gt;</pre>

 **Note:** In Silk Test 13.5 or later, whitespace in texts, which are retrieved through the `textContent` property of an element, is trimmed consistently across all supported browsers. For some browser versions, this whitespace handling differs to Silk Test versions prior to Silk Test 13.5. You can re-enable the old behavior by setting the `OPT_COMPATIBILITY` option to a version lower than 13.5.0. For example, to set the option to Silk Test 13.0, type the following into your script:

```
'VB .NET code
Agent.SetOption("OPT_COMPATIBILITY", "13.0.0")

// C# code
Agent.SetOption("OPT_COMPATIBILITY", "13.0.0");
```

## What Should I Take Care Of When Creating Cross-Browser Scripts?

When you are creating cross-browser scripts, you might encounter one or more of the following issues:

- Different attribute values. For example, colors in Internet Explorer are returned as "# FF0000" and in Mozilla Firefox as "rgb(255,0,0)".
- Different attribute names. For example, the font size attribute is called "fontSize" in Internet Explorer 8 or earlier and is called "font-size" in all other browsers, for example Internet Explorer 9 or later and Mozilla Firefox.
- Some frameworks may render different DOM trees.

## Which Locators are Best Suited for Stable Cross Browser Testing?

The built in locator generator attempts to create stable locators. However, it is difficult to generate quality locators if no information is available. In this case, the locator generator uses hierarchical information and indices, which results in fragile locators that are suitable for direct record and replay but ill-suited for stable, daily execution. Furthermore, with cross browser testing, several AJAX frameworks might render different DOM hierarchies for different browsers.

To avoid this issue, use custom IDs for the UI elements of your application.

## Why Are the Class and the Style Attributes Not Used in the Locator?

These attributes are on the ignore list because they might change frequently in AJAX applications and therefore result in unstable locators. However, in many situations these attributes can be used to identify objects, so it might make sense to use them in your application.

## Why Are Clicks Recorded Differently in Internet Explorer 10?

When you record a `Click` on a `DomElement` in Internet Explorer 10 and the `DomElement` is dismissed after the `Click`, then the recording behavior might not be as expected. If another `DomElement` is located beneath the initial `DomElement`, Silk Test records a `Click`, a `MouseMove`, and a `ReleaseMouse`, instead of recording a single `Click`.

A possible workaround for this unexpected recording behavior depends on the application under test. Usually it is sufficient to delete the unnecessary `MouseMove` and `ReleaseMouse` events from the recorded script.

## Why Do I Get an Invalidated-Handle Error?

This topic describes what you can do when Silk4NET displays the following error message: `The handle for this object has been invalidated.`

This message indicates that something caused the object on which you called a method, for example `WaitForProperty`, to disappear. For example, if something causes the browser to navigate to a new page, during a method call in a Web application, all objects on the previous page are automatically invalidated.

When testing a Web application, the reason for this problem might be the built-in synchronization. For example, suppose that the application under test includes a shopping cart, and you have added an item to this shopping cart. You are waiting for the next page to be loaded and for the shopping cart to change its status to `contains items`. If the action, which adds the item, returns too soon, the shopping cart on the first page will be waiting for the status to change while the new page is loaded, causing the shopping cart of the first page to be invalidated. This behavior will result in an invalidated-handle error.

As a workaround, you should wait for an object that is only available on the second page before you verify the status of the shopping cart. As soon as the object is available, you can verify the status of the shopping cart, which is then correctly verified on the second page.

## Starting a Browser from a Script

Instead of selecting a browser for replay at the start of a test, you might require to start a specific browser out of the test script during replay.

### Using the `BrowserBaseState` class

Using the `BrowserBaseState` class to start a browser out of a test script ensures that the browser that is specified by the `Executable` property is running and ready for testing. The base state additionally navigates to the URL that is specified by the `Url` property and brings the browser to the front.

The following code sample uses the `BrowserBaseState` class to start Internet Explorer.

```
' VB .NET code
Dim MyBrowserBaseState As New BrowserBaseState(BrowserType.InternetExplorer,
"http://www.borland.com")
MyBrowserBaseState.Execute()
```

### Using multiple instances of a browser

If you have more than one browser windows or tabs open, Silk4NET handles each browser window or tab as a distinct object with a unique locator. The locators are indexed, for example `WebBrowser`, `WebBrowser[1]`, `WebBrowser[2]`, and so on.

## Finding Hidden Input Fields

Hidden input fields are HTML fields for which the tag includes `type="hidden"`. To enable a `Find` to locate hidden input fields, you can use the `OPT_XBROWSER_FIND_HIDDEN_INPUT_FIELDS` option. The default value of the option is `TRUE`.

```
' VB .NET code
Agent.SetOption("OPT_XBROWSER_FIND_HIDDEN_INPUT_FIELDS", true)
```

# Attributes for Web Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Web applications include:

- caption (supports wildcards ? and \*)
- all DOM attributes (supports wildcards ? and \*)



**Note:** Empty spaces are handled differently by each browser. As a result, the `textContent` and `innerText` attributes have been normalized. Empty spaces are skipped or replaced by a single space if an empty space is followed by another empty space. Empty spaces are detected spaces, carriage returns, line feeds, and tabs. The matching of such values is normalized also. For example:

```
<a>abc  
abc</a>
```

Uses the following locator:

```
//A[@innerText='abc abc']
```

## Custom Attributes for Web Applications

HTML defines a common attribute `ID` that can represent a stable identifier. By definition, the ID uniquely identifies an element within a document. Only one element with a specific ID can exist in a document.

However, in many cases, and especially with AJAX applications, the ID is used to dynamically identify the associated server handler for the HTML element, meaning that the ID changes with each creation of the Web document. In such a case the ID is not a stable identifier and is not suitable to identify UI controls in a Web application.

A better alternative for Web applications is to introduce a new custom HTML attribute that is exclusively used to expose UI control information to Silk4NET.

Custom HTML attributes are ignored by browsers and by that do not change the behavior of the AUT. They are accessible through the DOM of the browser. Silk4NET allows you to configure the attribute that you want to use as the default attribute for identification, even if the attribute is a custom attribute of the control class. To set the custom attribute as the default identification attribute for a specific technology domain, click **Silk4NET > Edit Options > Custom Attributes** and select the technology domain.

The application developer just needs to add the additional HTML attribute to the Web element.

Original HTML code:

```
<A HREF="http://abc.com/control=4543772788784322..." <IMG  
src="http://abc.com/xxx.gif" width=16 height=16> </A>
```

HTML code with the new custom HTML attribute `AUTOMATION_ID`:

```
<A HREF="http://abc.com/control=4543772788784322..."  
AUTOMATION_ID = "AID_Login" <IMG src="http://abc.com/xxx.gif"  
width=16 height=16> </A>
```

When configuring the custom attributes, Silk4NET uses the custom attribute to construct a unique locator whenever possible. Web locators look like the following:

```
...//DomLink[@AUTOMATION_ID='AID_Login']
```

### Example: Changing ID

One example of a changing ID is the Google Widget Toolkit (GWT), where the ID often holds a dynamic value which changes with every creation of the Web document:

```
ID = 'gwt-uid-<nnn>'
```

In this case `<nnn>` changes frequently.

## xBrowser Class Reference

When you configure an xBrowser application, Silk4NET automatically provides built-in support for testing standard xBrowser controls.

## Limitations for Testing on Microsoft Windows 10

The following list lists the known limitations for testing on Microsoft Windows 10 (Windows 10):

- Silk Test does not support testing Universal Windows Platform (UWP) apps on Windows 10.

## 64-bit Application Support

Silk4NET supports testing 64-bit applications for the following technology types:

- Windows Forms
- Windows Presentation Foundation (WPF)
- Microsoft Windows API-based
- Java AWT/Swing
- Java SWT

Check the *Release Notes* for the most up-to-date information about supported versions, any known issues, and workarounds.

## Supported Attribute Types

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests. If necessary, you can change the attribute type in one of the following ways:

- Manually typing another attribute type and value.
- Specifying another preference for the default attribute type by changing the **Preferred attribute list** values.

## Attributes for Apache Flex Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Flex applications include:

- automationName
- caption (similar to automationName)
- automationClassName (e.g. `FlexButton`)

- `className` (the full qualified name of the implementation class, e.g. `mx.controls.Button`)
- `automationIndex` (the index of the control in the view of the FlexAutomation, e.g. `index:1`)
- `index` (similar to `automationIndex` but without the prefix, e.g. `1`)
- `id` (the id of the control)
- `windowId` (similar to `id`)
- `label` (the label of the control)
- All dynamic locator attributes



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards `?` and `*`.

For additional information on dynamic locator attributes, see *Dynamic Locator Attributes*.

## Attributes for Java AWT/Swing Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Java AWT/Swing include:

- `caption`
- `priorlabel`: Helps to identify text input fields by the text of its adjacent label field. Every input field of a form usually has a label that explains the purpose of the input. For controls that do not have a caption, the attribute `priorlabel` is automatically used in the locator. For the `priorlabel` value of a control, for example a text input field, the caption of the closest label at the left side or above the control is used.
- `name`
- `accessibleName`
- *Swing only*: All custom object definition attributes set in the widget with `putClientProperty("propertyName", "propertyValue")`



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards `?` and `*`.

## Attributes for Java SWT Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Java SWT include:

- `caption`
- all custom object definition attributes



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards `?` and `*`.

## Attributes for SAP Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for SAP include:

- automationId
- caption



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

## Locator Attributes for Identifying Silverlight Controls

Supported locator attributes for Silverlight controls include:

- automationId
- caption
- className
- name
- All dynamic locator attributes



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

For additional information on dynamic locator attributes, see *Dynamic Locator Attributes*.

To identify components within Silverlight scripts, you can specify the *automationId*, *caption*, *className*, *name* or any dynamic locator attribute. The *automationId* can be set by the application developer. For example, a locator with an *automationId* might look like `//SLButton[@automationId="okButton"]`.

We recommend using the *automationId* because it is typically the most useful and stable attribute.

Attribute Type	Description	Example
automationId	An identifier that is provided by the developer of the application under test. The Visual Studio designer automatically assigns an <i>automationId</i> to every control that is created with the designer. The application developer uses this ID to identify the control in the application code.	// SLButton[@automationId="okButton"]
caption	The text that the control displays. When testing a localized application in multiple languages, use the <i>automationId</i> or <i>name</i> attribute instead of the <i>caption</i> .	//SLButton[@caption="Ok"]
className	The simple .NET class name (without namespace) of the Silverlight control. Using the <i>className</i> attribute can help to identify a custom control that is derived from a standard Silverlight control that Silk4NET recognizes.	// SLButton[@className='MyCustomButton']
name	The name of a control. Can be provided by the developer of the application under test.	//SLButton[@name="okButton"]



**Attention:** The *name* attribute in XAML code maps to the locator attribute *automationId*, not to the locator attribute *name*.

During recording, Silk4NET creates a locator for a Silverlight control by using the *automationId*, *name*, *caption*, or *className* attributes in the order that they are listed in the preceding table. For example, if a control has an *automationId* and a *name*, Silk4NET uses the *automationId*, if it is unique, when creating the locator.

The following table shows how an application developer can define a Silverlight button with the text "Ok" in the XAML code of the application:

XAML Code for the Object	Locator to Find the Object from Silk Test
<code>&lt;Button&gt;Ok&lt;/Button&gt;</code>	<code>//SLButton[@caption="Ok" ]</code>
<code>&lt;Button Name="okButton"&gt;Ok&lt;/Button&gt;</code>	<code>//SLButton[@automationId="okButton" ]</code>
<code>&lt;Button AutomationProperties.AutomationId="okB utton"&gt;Ok&lt;/Button&gt;</code>	<code>//SLButton[@automationId="okButton" ]</code>
<code>&lt;Button AutomationProperties.Name="okButton"&gt;O k&lt;/Button&gt;</code>	<code>//SLButton[@name="okButton" ]</code>

## Locator Attributes for Identifying Rumba Controls

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests. Supported attributes include:

<b>caption</b>	The text that the control displays.
<b>priorlabel</b>	Since input fields on a form normally have a label explaining the purpose of the input, the intention of <b>priorlabel</b> is to identify the text input field, <b>RumbaTextField</b> , by the text of its adjacent label field, <b>RumbaLabel</b> . If no preceding label is found in the same line of the text field, or if the label at the right side is closer to the text field than the left one, a label on the right side of the text field is used.
<b>StartRow</b>	This attribute is not recorded, but you can manually add it to the locator. Use <b>StartRow</b> to identify the text input field, <b>RumbaTextField</b> , that starts at this row.
<b>StartColumn</b>	This attribute is not recorded, but you can manually add it to the locator. Use <b>StartColumn</b> to identify the text input field, <b>RumbaTextField</b> , that starts at this column.
<b>All dynamic locator attributes.</b>	For additional information on dynamic locator attributes, see <i>Dynamic Locator Attributes</i> .

 **Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

## Attributes for Web Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Web applications include:

- caption (supports wildcards ? and \*)
- all DOM attributes (supports wildcards ? and \*)

 **Note:** Empty spaces are handled differently by each browser. As a result, the `textContent` and `innerText` attributes have been normalized. Empty spaces are skipped or replaced by a single space if an empty space is followed by another empty space. Empty spaces are detected spaces, carriage returns, line feeds, and tabs. The matching of such values is normalized also. For example:

```
<a>abc
abc</a>
```

Uses the following locator:

```
//A[@innerText='abc abc']
```

## Attributes for Windows Forms Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Windows Forms applications include:

- automationid
- caption
- windowid
- priorlabel (For controls that do not have a caption, the priorlabel is used as the caption automatically. For controls with a caption, it may be easier to use the caption.)



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

## Attributes for Windows Presentation Foundation (WPF) Applications

Supported attributes for WPF applications include:

- automationId
- caption
- className
- name
- All dynamic locator attributes.



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

For additional information on dynamic locator attributes, see *Dynamic Locator Attributes*.

### Object Recognition

To identify components within WPF scripts, you can specify the *automationId*, *caption*, *className*, or *name*. The name that is given to an element in the application is used as the *automationId* attribute for the locator if available. As a result, most objects can be uniquely identified using only this attribute. For example, a locator with an *automationId* might look like: //

```
WPFButton[@automationId='okButton']"
```

If you define an *automationId* and any other attribute, only the *automationId* is used during replay. If there is no *automationId* defined, the *name* is used to resolve the component. If neither a *name* nor an *automationId* are defined, the *caption* value is used. If no caption is defined, the *className* is used. We recommend using the *automationId* because it is the most useful property.

Attribute Type	Description	Example
automationId	An ID that was provided by the developer of the test application.	//WPFButton[@automationId='okButton']"

Attribute Type	Description	Example
name	The name of a control. The Visual Studio designer automatically assigns a name to every control that is created with the designer. The application developer uses this name to identify the control in the application code.	<code>//WPFButton[@name= 'okButton' ] "</code>
caption	The text that the control displays. When testing a localized application in multiple languages, use the automationId or name attribute instead of the caption.	<code>//WPFButton[@automationId= 'Ok' ] "</code>
className	The simple .NET class name (without namespace) of the WPF control. Using the class name attribute can help to identify a custom control that is derived from a standard WPF control that Silk4NET recognizes.	<code>//WPFButton[@className= 'MyCustomButton' ] "</code>

During recording, Silk4NET creates a locator for a WPF control by using the *automationId*, *name*, *caption*, or *className* attributes in the order that they are listed in the preceding table. For example, if a control has a *automationId* and a *name*, Silk4NET uses the *automationId* when creating the locator.

The following example shows how an application developer can define a *name* and an *automationId* for a WPF button in the XAML code of the application:

```
<Button Name="okButton" AutomationProperties.AutomationId="okButton"
Click="okButton_Click">Ok</Button>
```

## Attributes for Windows API-based Client/Server Applications

When a locator is constructed, the attribute type is automatically assigned based on the technology domain that your application uses. The attribute type and value determines how the locator identifies objects within your tests.

Supported attributes for Windows API-based client/server applications include:

- caption
- windowid
- priorlabel: Helps to identify text input fields by the text of its adjacent label field. Every input field of a form usually has a label that explains the purpose of the input. For controls that do not have a caption, the attribute **priorlabel** is automatically used in the locator. For the **priorlabel** value of a control, for example a text box, the caption of the closest label at the left side or above the control is used.



**Note:** Attribute names are case sensitive, except for mobile applications, where the attribute names are case insensitive. Attribute values are by default case insensitive, but you can change the default setting like any other option. The locator attributes support the wildcards ? and \*.

## Dynamic Locator Attributes

In a locator for identifying a control during replay you can use a pre-defined set of locator attributes, for example *caption* and *automationId*, which depend on the technology domain. But you can also use every property, including dynamic properties, of a control as locator attribute. A list of available properties for a certain control can be retrieved with the `GetPropertyList` method. All returned properties can be used for identifying a control with a locator.



**Note:** You can use the `GetProperty` method to retrieve the actual value for a certain property of interest. You can then use this value in your locator.

### Example

If you want to identify the button that has the user input focus in a Silverlight application, you can type:

```
browser.Find("//SLButton[@IsKeyboardFocused=true] ")
```

or alternatively

```
Dim button = dialog.SLButton("@IsKeyboardFocused=true")
```

This works because Silk4NET exposes a property called `IsDefault` for the Silverlight button control.

### Example

If you want to identify a button in a Silverlight application with the font size 12 you can type:

```
Dim button = browser.Find("//SLButton[@FontSize=12] ")
```

or alternatively


```
Dim button = browser.SLButton("@FontSize=12")
```

This works because the underlying control in the application under test, in this case the Silverlight button, has a property called `FontSize`.

# Keyword-Driven Tests

*Keyword-driven testing* is a software testing methodology that separates test design from test development and therefore allows the involvement of additional professional groups, for example business analysts, in the test automation process. Silk Central and Silk Test support the keyword-driven testing methodology and allow a very close collaboration between automation engineers and business analysts by having automation engineers develop a maintainable automation framework consisting of shared assets in the form of keywords in Silk Test. These keywords can then be used by business analysts either in Silk Test to create new keyword-driven tests or in Silk Central to convert their existing manual test assets to automated tests or to create new keyword-driven tests.

- A *keyword-driven test* is an executable collection of keywords. A keyword-driven test can be played back just like any other test.
- A *keyword sequence* is a keyword that is a combination of other keywords. Keyword sequences bundle often encountered combinations of keywords into a single keyword, enabling you to reduce maintenance effort and to keep your tests well-arranged.
- A *keyword* is a defined combination of one or more actions on a test object. The implementation of a keyword can be done with various tools and programming languages, for example Java or .NET.

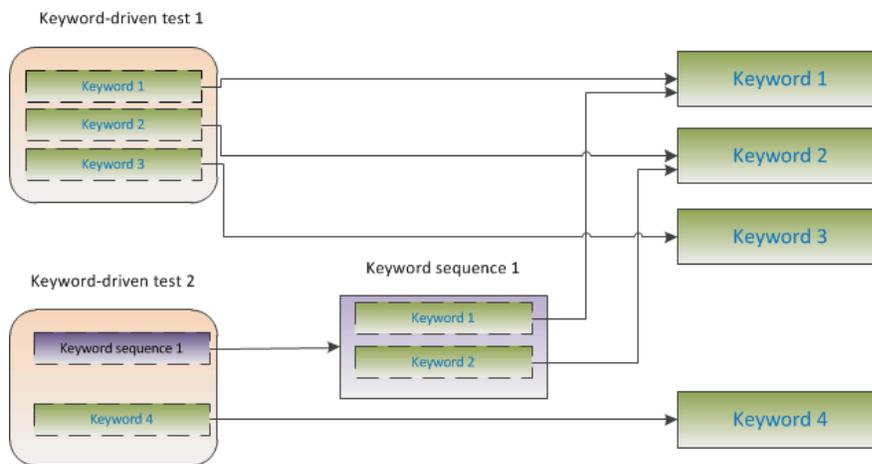

There are two phases required to create keyword-driven tests:

1. Designing the test.
2. Implementing the keywords.

For a complete list of the record and replay controls available for keyword-driven testing, see the *Keyword-Driven Testing Class Reference*.



**Note:** Silk4NET does not support keyword-driven testing in Visual Studio 2010.

## Advantages of Keyword-Driven Testing

The advantages of using the keyword-driven testing methodology are the following:

- Keyword-driven testing separates test automation from test case design, which allows for better division of labor and collaboration between test engineers implementing keywords and subject matter experts designing test cases.
- Tests can be developed early, without requiring access to the application under test, and the keywords can be implemented later.

- Tests can be developed without programming knowledge.
- Keyword-driven tests require less maintenance in the long run. You need to maintain the keywords, and all keyword-driven tests using these keywords are automatically updated.
- Test cases are concise.
- Test cases are easier to read and to understand for a non-technical audience.
- Test cases are easy to modify.
- New test cases can reuse existing keywords, which amongst else makes it easier to achieve a greater test coverage.
- The internal complexity of the keyword implementation is not visible to a user that needs to create or execute a keyword-driven test.

## Keywords

A *keyword* is a defined combination of one or more actions on a test object. The implementation of a keyword can be done with various tools and programming languages, for example Java or .NET. In Silk4NET, a keyword is a method with the attribute `Keyword` before the method name. Keywords are saved as keyword assets.

You can define keywords and keyword sequences during the creation of a keyword-driven test and you can then implement them as test methods. You can also mark existing test methods as keywords with the `Keyword` attribute. Keywords are defined as follows:

```
'VB .NET code
<Keyword( "keyword_name" )>

// C# code
[Keyword( "keyword_name" )]
```

A *keyword sequence* is a keyword that is a combination of other keywords. Keyword sequences bundle often encountered combinations of keywords into a single keyword, enabling you to reduce maintenance effort and to keep your tests well-arranged.

A keyword can have input and output parameters. Any parameter of the test method that implements the keyword is a parameter of the keyword. To specify a different name for a parameter of a keyword, you can use the following:

```
'VB .NET code
Argument( "parameter_name" )

// C# code
[Argument( "parameter_name" )]
```

### Example

A test method that is marked as a keyword can look like the following:

```
'VB .NET code
<Keyword( "Login" )>
Public Sub Login()
    ... // method implementation
End Sub
```

```
// C# code
[Keyword( "Login" )]
public void Login(){
    ... // method implementation
}
```

or

```
'VB .NET code
<Keyword( "Login", Description:= "Logs in with the given name and
password." )>
```

```
Public Sub Login(<Argument("UserName")> username As String,
<Argument("Password")> password As String)
    ... // method implementation
End Sub
```

```
// C# code
[Keyword("Login", Description="Logs in with the given name and
password.")]
public void Login([Argument("UserName")] string userName,
[Argument("Password")] string password) {
    ... // method implementation
}
```

where the keyword logs into the application under test with a given user name and password.



**Note:** If you are viewing this help topic in PDF format, this code sample might include line-breaks which are not allowed in scripts. To use this code sample in a script, remove these line-breaks.

- The keyword name parameter of the `Keyword` attribute is optional. You can use the keyword name parameter to specify a different name than the method name. If the parameter is not specified, the name of the method is used as the keyword name.
- The `Argument` attribute is also optional. If a method is marked as a keyword, then all arguments are automatically used as keyword arguments. You can use the `Argument` attribute to specify a different name for the keyword argument, for example `UserName` instead of `userName`.

## Creating a Keyword-Driven Test in Silk4NET

Before you can create a keyword-driven test in Silk4NET, you have to select a project.

Use the **Keyword-Driven Test Editor** to combine new keywords and existing keywords into new keyword-driven tests. New keywords need to be implemented as automated test methods in a later step.

1. Select the project in which the new test should be included.

By default, if a project is active, the new test is created in the active project.



**Note:** To optimally use the functionality that Silk4NET provides, create an individual project for each application that you want to test, except when testing multiple applications in the same test.

2. Click **Silk4NET > New Keyword-Driven Test**. The **Add New Item** dialog box opens.
3. Type a name for the test into the **Name** field and click **Add**. The **Create a Silk4NET Test** dialog box opens.



**Note:** If a security warning displays, stating that running this text template might potentially harm your computer, check the check box to no longer display this message and click **OK** to run the template, as the template is required by Silk4NET.

4. Select **Create an empty Silk4NET test**. To record a new keyword-driven test, see [Recording a Keyword-Driven Test](#).
5. Click **OK**. The **Keyword-Driven Test Editor** opens.
6. Perform one of the following actions:
  - To add a new keyword, type a name for the keyword into the **New Keyword** field.
  - To add an existing keyword, expand the list and select the keyword that you want to add.
7. Press **Enter**.

8. Repeat the previous two steps until the test includes all the keywords that you want to execute.
9. Click **File > Save**.

Continue with implementing the keywords or with executing the test, if all keywords are already implemented.

## Recording a Keyword-Driven Test in Silk4NET

Before you can create a keyword-driven test in Silk4NET, you have to select a project.

To record a single keyword, see [Recording a Keyword](#).

To record a new keyword-driven test:

1. Click **Silk4NET > New Keyword-Driven Test**. The **Add New Item** dialog box opens.
2. Type a name for the test into the **Name** field and click **Add**. The **Create a Silk4NET Test** dialog box opens.
3. Select **Record a Silk4NET test** and click **OK**.
4. If you have not set an application configuration for the current project, select the tab that corresponds to the type of application that you are testing:
  - If you are testing a standard application that does not run in a browser, select the **Windows** tab.
  - If you are testing a web application or a mobile web application, select the **Web** tab.
  - If you are testing a native mobile application, select the **Mobile** tab.
5. To test a standard application, select the application from the list.
6. To test a Web application or a mobile Web application, if you have not set an application configuration for the current project, select one of the installed browsers or mobile browsers from the list.

Specify the Web page to open in the **Enter URL to navigate** text box. If an instance of the selected browser is already running, you can click **Use URL from running browser** to record against the URL currently displayed in the running browser instance. For the tutorial, select **Internet Explorer** and specify <http://demo.borland.com/InsuranceWebExtJS/> in the **Enter URL to navigate** text box.
7. To test a native mobile application (app) if you have not set an application configuration for the current project:
  - a) Select the mobile device, on which you want to test the app, from the list.
  - b) Click **Browse** to select the app file or enter the full path to the app file into the **Mobile app file** text field.

Silk4NET supports HTTP and UNC formats for the path.

Silk4NET installs the app on the mobile device or emulator.
8. If you have set an application configuration for the current project and you are testing a Web application, the **Select Browser** dialog box opens. Select the browser on which you want to record the keyword.
9. Depending on the dialog that is open, perform one of the following:
  - In the **Select Application** dialog box, click **OK**.
  - In the **Select Browser** dialog box, click **Record**.
10. In the application under test, perform the actions that you want to include in the first keyword.

For information about the actions available during recording, see *Actions Available During Recording*.
11. To specify a name for the keyword, hover the mouse cursor over the keyword name in the **Recording** window and click **Edit**.

 **Note:** Silk4NET automatically adds the keyword *Start application* to the start of the keyword-driven test. In this keyword, the applications base state is executed to enable the test to replay correctly. For additional information on the base state, see *Base State*.
12. Type a name for the keyword into the **Keyword name** field.

13. Click **OK**.

14. To record the actions for the next keyword, type a name for the new keyword into the **New keyword name** field and click **Add**. Silk4NET records any new actions into the new keyword.

15. Create new keywords and record the actions for the keywords until you have recorded the entire keyword-driven test.

16. Click **Stop**. The **Record Complete** dialog box opens.

Silk4NET creates the new keyword-driven test with all recorded keywords.

## Setting the Base State for a Keyword-Driven Test in Silk4NET

When you execute a keyword-driven test with Silk4NET and the keyword-driven test calls a base state keyword, Silk4NET starts your AUT from the base state.

During the recording of a keyword-driven test, Silk4NET searches in the current project for a base state keyword, which is a keyword for which the `IsBaseState` property is set to `True`.

- If a base state keyword exists in the current project, Silk4NET inserts this keyword as the first keyword of the keyword-driven test.
- If there is no base state keyword in the project, Silk4NET creates a new base state keyword with the name *Start application* and inserts it as the first keyword of the keyword-driven test.

To manually mark a keyword as a base state keyword, add the `IsBaseState` property to the `Keyword` attribute, and set the value of the property to `True`:

```
' VB .NET code
<Keyword("Start application", IsBaseState:=True)>
Public Sub Start_application()
    ' Base state implementation
End Sub
```

```
// C# code
[Keyword("Start application", IsBaseState=true)]
public void Start_application()
{
    // Base state implementation
}
```

## Implementing a Keyword in Silk4NET

Before implementing a keyword, define the keyword as part of a keyword-driven test.

To implement a keyword for reuse in keyword-driven tests:

1. Open a keyword-driven test that includes the keyword that you want to implement.
2. In the **Keyword-Driven Test Editor**, click **Implement Keyword** to the left of the keyword that you want to implement. The **Create a Keyword** dialog box opens.
3. Perform one of the following actions:
  - To record the keyword, click **Record a keyword**.
  - To create an empty keyword method, click **Create an empty keyword method stub**.
4. Click **OK**.
5. In the **Save Keyword Implementation** dialog box, define the name and location of the file into which you want to save the keyword implementation code and click **Save**.

6. If you have set an application configuration for the current project and you are testing a Web application, the **Select Browser** dialog box opens. Select the browser on which you want to record the keyword.
7. Click **Record**.

For additional information on recording, see [Recording a Keyword](#).

## Recording a Keyword in Silk4NET

You can only record actions for a keyword that already exists in a keyword-driven test, not for a keyword that is completely new. To record a new keyword-driven test, see [Recording a Keyword-Driven Test](#).

To record the actions for a new keyword:

1. Open a keyword-driven test that includes the keyword that you want to record.
2. In the **Keyword-Driven Test Editor**, click **Implement Keyword** to the left of the keyword that you want to implement. The **Create a Keyword** dialog box opens.
3. Click **OK**.
4. If you have set an application configuration for the current project and you are testing a Web application, the **Select Browser** dialog box opens. Select the browser on which you want to record the keyword.
5. In the application under test, perform the actions that you want to test.

For information about the actions available during recording, see [Actions Available During Recording](#).

6. Click **Stop**. The **Record Complete** dialog box opens.

## Marking a Test Method in a Script as a Keyword

Mark an existing test method in a script as a keyword to reuse the method in keyword-driven tests.

1. Open the script which includes the test method that you want to mark as a keyword.
2. Add `<Keyword( )>` or `[Keyword]`, depending on whether you are editing a VB .NET or a C# script, to the start of the test method.

By default, the keyword name is the name of the test method.

3. *Optional:* You can set a different name for the keyword by adding `<Keyword( "KeywordName" )>` or `[Keyword( "KeywordName" )]`, depending on whether you are editing a VB .NET or a C# script, to the start of the test method.

You can now use the test method as a keyword in a keyword-driven test.

### Examples

To mark the test method `Login` as a new keyword with the name `Login`, type the following before the start of the test method:

```
'VB .NET code
<Keyword( "Login" )>
```

```
// C# code
[Keyword( "Login" )]
```

To mark the test method `Login` as a new keyword with the name `Login` and with the two input parameters `UserName` and `PassWord`, type the following:

```
// VB .NET code
<Keyword( "Login", Description="Logs in with the given name and
password." )>
Public Sub Login(Argument( "UserName" ) As String,
Argument( "PassWord" ) As String)
```

```

... //
End Sub

// C# code
[Keyword("Login", Description:="Logs in with the given name and
password.")]
public void Login([Argument("UserName")] string UserName,
[Argument("PassWord")] string PassWord)
{
... // method implementation
}

```



**Note:** If you are viewing this help topic in PDF format, this code sample might include line-breaks which are not allowed in scripts. To use this code sample in a script, remove these line-breaks.

## Editing a Keyword-Driven Test



**Note:** In Silk4NET, you can edit and execute keyword-driven tests that are located in Silk4NET, and you can execute keyword-driven tests that are stored in Silk Central. To edit a keyword-driven test, which is stored in Silk Central, open the keyword-driven test in the **Keyword-Driven Test Editor** and click **Edit**.

To edit a keyword-driven test:

1. Open the keyword-driven test in the **Keyword-Driven Test Editor**.
  - a) In the **Solution Explorer**, expand the project in which the keyword-driven test resides.
  - b) Expand the **Keyword Driven Tests** folder.
  - c) Double-click the keyword-driven test that you want to edit.
2. To add a new keyword to the keyword-driven test:
  - a) Click into the **New Keyword** field.
  - b) Type a name for the new keyword.
  - c) Press **Enter**.
3. To edit an existing keyword, click **Open Keyword** to the left of the keyword.



**Note:** Silk Central has the ownership of any keyword that has been created in Silk Central, which means any changes that you make to such keywords are saved in Silk Central, not in Silk4NET.

4. To remove the keyword from the keyword-driven test, click **Delete Keyword** to the left of the keyword. The keyword is still available in the **Keywords** window and you can re-add it to the keyword-driven test at any time.
5. To save your changes, click **File > Save**.

## Managing Keywords in a Test in Silk Central

The **Keywords** page enables you to manage the keywords of the selected keyword-driven test. The following actions are possible:

Task	Steps
Opening a test or keyword sequence in Silk Test	Click <b>Open with Silk Test</b> to open the selected test or keyword sequence in Silk Test.

Task	Steps
Adding a keyword	<ol style="list-style-type: none"> <li>1. Click <b>New Keyword</b> at the bottom of the keywords list, or right-click a keyword and select <b>Insert Keyword Above</b> from the context menu. <p> <b>Note:</b> You can let Silk Test recommend keywords based on their usage. Toggle the recommendations on or off with <b>Enable Recommendations</b> or <b>Disable Recommendations</b> in the context menu. For additional information, see <i>Which Keywords Does Silk4NET Recommend?</i>.</p> </li> <li>2. Select a keyword from the list of available keywords or type a new name to create a new keyword.</li> <li>3. Click <b>Save</b>.</li> </ol> <p>Alternatively, double click an existing keyword in the <b>All Keywords</b> pane on the right or drag and drop it.</p> <p> <b>Tip:</b> You can select multiple keywords with <b>Ctrl+Click</b>. When dropping them, they will be sorted in the order that you selected them in.</p>
Deleting a keyword	<p>Click  in the <b>Actions</b> column of the keyword that you want to delete. Click <b>Save</b>.</p>
Changing the order of keywords	<p>Drag and drop a keyword to the desired position. Click <b>Save</b>.</p>
Creating a keyword sequence (a keyword consisting of other keywords)	<ol style="list-style-type: none"> <li>1. Select the keywords that you want to combine in the keywords list. Use <b>Ctrl+Click</b> or <b>Shift+Click</b> to select multiple keywords.</li> <li>2. Right-click your selection and click <b>Combine</b>.</li> <li>3. Specify a <b>Name</b> and <b>Description</b> for the new keyword sequence.</li> </ol>
Extracting keywords from a keyword sequence	<p>Right-click a keyword sequence and click <b>Extract keywords</b>. The original keyword sequence is then replaced by the keywords that it contained, but it is not removed from the library. Click <b>Save</b>.</p>
Defining parameters for a keyword sequence	<ol style="list-style-type: none"> <li>1. Click <b>Parameters</b> above the keywords list. The <b>Parameters</b> dialog box appears.</li> <li>2. Click <b>Add Parameter</b>.</li> <li>3. Specify a <b>Name</b> for the new parameter. If the parameter is an outgoing parameter (delivers a value, instead of requiring an input value), check the <b>Output</b> checkbox.</li> <li>4. Click <b>OK</b>.</li> <li>5. Click <b>Save</b>.</li> </ol>
Editing a draft keyword	<ol style="list-style-type: none"> <li>1. Click  in the <b>Actions</b> column of the draft keyword that you want to edit.</li> <li>2. Select a <b>Group</b> or specify a new group for the keyword.</li> <li>3. Type a <b>Description</b> for the keyword. This information is valuable for the engineer who will implement the keyword.</li> <li>4. Click <b>OK</b>.</li> <li>5. <i>Optional:</i> Click into a parameter field to add parameters for the keyword. If the keyword is implemented with Silk Test, these parameters will appear in the generated code stub.</li> <li>6. Click <b>Save</b>.</li> </ol>

Task	Steps
Searching for a keyword	<p>Use the search field in the <b>Keywords</b> window to find a specific keyword. When you enter alphanumeric characters, the list is dynamically updated with all existing matches. Tips for searching:</p> <ul style="list-style-type: none"> <li>• The search is case-insensitive: <code>doAction</code> will find <code>doaction</code> and <code>DOAction</code>.</li> <li>• Enter only capital letters to perform a so-called <i>Camel/Case</i> search: <code>ECD</code> will find <code>Enter Car Details</code>, <code>Enter Contact Details</code> and <code>EnterContactDetails</code>.</li> <li>• Keyword and group names are considered: <code>test</code> will find all keywords that contain <code>test</code> and all keywords in groups where the group name contains <code>test</code>.</li> <li>• <code>?</code> replaces 0-1 characters: <code>user?test</code> will find <code>userTest</code> and <code>usersTest</code>.</li> <li>• <code>*</code> replaces 0-n characters: <code>my*keyword</code> will find <code>myKeyword</code>, <code>myNewKeyword</code> and <code>my_other_keyword</code>.</li> <li>• <code>&lt;string&gt;.</code> only searches in group names: <code>group.</code> will find all keywords in groups where the group name contains <code>group</code>.</li> <li>• <code>.&lt;string&gt;</code> only searches in keyword names: <code>.keyword</code> will find all keywords that contain <code>keyword</code>.</li> <li>• <code>&lt;string&gt;.&lt;string&gt;</code> searches for a keyword in a specific group: <code>group.word</code> will find <code>myKeyword</code> in the group <code>myGroup</code>.</li> <li>• Use quotes to search for an exact match: <code>'Keyword'</code> will find <code>Keyword</code> and <code>MyKeyword</code>, but not <code>keyword</code>.</li> </ul>

## Which Keywords Does Silk4NET Recommend?

When you add keywords to a keyword-driven test or a keyword sequence in the **Keyword-Driven Test Editor**, Silk4NET recommends existing keywords which you might want to use as the next keyword in your test. The recommended keywords are listed on top of the keywords list, and are indicated by a bar graph, with the filled-out portion of the graph corresponding to how much Silk4NET recommends the keyword.

Silk4NET recommends the keywords based on the following:

- When you add the first keyword to a keyword-driven test or a keyword sequence, Silk4NET searches for similar keywords that are used as the first keyword in other keyword-driven tests or keyword sequences. The keywords that are used most frequently are recommended higher.
- When you add additional keywords to a keyword-driven test or a keyword sequence, which already includes other keywords, Silk4NET recommends keywords as follows:
  - If there are keywords before the position in the keyword-driven test or the keyword sequence, to which you add a new keyword, Silk4NET compares the preceding keywords with keyword combinations in all other keyword-driven tests and keyword sequences and recommends the keywords that most frequently follow the preceding combination of keywords.
  - If there are no keywords before the position in the keyword-driven test or the keyword sequence, but there are keywords after the current position, then Silk4NET compares the succeeding keywords with keyword combinations in all other keyword-driven tests and keyword sequences and recommends the keywords that most frequently precede the succeeding combination of keywords.
- Additionally, Silk4NET takes into account how similar the found keywords are. For example, if both the name and group of two keywords match, then Silk4NET recommends these keywords higher in comparison to two keywords for which only the name matches.

- If you have established a connection with Silk Central, any keywords included in keyword-driven tests, which belong to the keyword library that corresponds to the current project, are also considered.

## Using Parameters with Keywords

A keyword or a keyword sequence can have input and output parameters. This topic describes how you can handle these parameters with Silk4NET.

In the **Keyword-Driven Test Editor**, you can view any defined parameters for a keyword or a keyword sequence and you can edit the parameter values.

In the **Keywords** window, you can see which parameters are assigned to a keyword or a keyword sequence when you hover the mouse cursor over the keyword or keyword sequence.

### Input parameters for simple keywords

You can define and use input parameters for keywords in the same way as for any other test method.

The following code sample shows how you can define the keyword `SetUserDetails` with the two input parameters `userName` and `password`:

```
// C# code
[Keyword]
public void SetUserDetails(string userName, string password) {
    ...
}
```

```
' VB .NET code
<Keyword>
public Sub SetUserDetails(userName As String, password As String)
    ...
End Sub
```

### Output parameters for simple keywords

You can define a return value or one or more output parameters for a keyword. You can also use a combination of a return value and one or more output parameters.

The following code sample shows how you can define the keyword `GetText` that returns a string:

```
// C# code
[Keyword]
public string GetText() {
    return "text";
}
```

```
' VB .NET code
<Keyword>
public Function GetText As String
    Return "text"
End Function
```

The following code sample shows how you can define the keyword `GetUserDetails` with the two output parameters `userName` and `password`:

```
// C# code
[Keyword]
public void GetUserDetails(out string userName, out string password) {
    userName="name";
    password="password";
}
```

```
' VB .NET code
<Keyword>
public Sub GetUserDetails(ByRef userName As String, ByRef password As String)
```

```
    userName= "name"  
    password= "password"  
End Sub
```

### Parameters for keyword sequences

You can define or edit the parameters for a keyword sequence in the **Parameters** dialog box, which you can open if you click **Parameters** in the **Keyword Sequence Editor**.

## Example: Keywords with Parameters

This topic provides an example of how you can use keywords with parameters.

As a first step, create a keyword-driven test which contains the keywords that you want to use. You can do this by recording an entire keyword-driven test, or by creating a new keyword-driven test and by adding the keywords in the keyword-driven test editor.

In this example, the keyword-driven test includes the following keywords:

- Start application** This is the standard keyword that starts the AUT and sets the base state.
- Login** This keyword logs into the AUT with a specific user, identified by a user name and a password.
- GetCurrentUser** This keyword returns the name of the user that is currently logged in to the AUT.
- AssertEquals** This keyword compares two values.
- Logout** This keyword logs the user out from the AUT.

The next step is to add the parameters to the keywords. To do this, open the test scripts of the keywords and add the parameters to the methods.

To add the input parameters `UserName` and `Password` to the keyword `Login`, change

```
// C# code  
[Keyword]  
public void Login() {  
    ...  
}
```

```
' VB .NET code  
<Keyword>  
public Sub Login()  
    ...  
End Sub
```

to

```
// C# code  
[Keyword]  
public void Login(string UserName, string Password) {  
    ...  
}
```

```
' VB .NET code  
<Keyword>  
public Sub Login(UserName As String, Password As String)  
    ...  
End Sub
```

To add the output parameter `UserName` to the keyword `GetCurrentUser`, change

```
// C# code  
[Keyword]  
public void GetCurrentUser() {
```

```

...
}

' VB .NET code
<Keyword>
public Sub GetCurrentUser()
    ...
End Sub

to

// C# code
[Keyword]
public void GetCurrentUser(out string CurrentUser) {
    ...
}

' VB .NET code
<Keyword>
public Sub GetCurrentUser(ByRef CurrentUser As String)
    ...
End Sub

```

The keyword-driven test in the **Keyword-Driven Test Editor** should look similar to the following:

		Keyword	Parameters	
1	 	Start application		
2	 	Login	<i>UserName</i>	<i>Password</i>
3	 	GetCurrentUser	<i>CurrentUser ←</i>	
4	 	AssertEquals	<i>Expected</i>	<i>Actual</i>
5	 	Logout		

Now you can specify actual values for the input parameters in the **Keyword-Driven Test Editor**. To retrieve the value of the output parameter `UserName` of the keyword `GetCurrentUser`, provide a variable, for example `${current user}`. You can then pass the value that is stored in the variable to subsequent keywords.

		Keyword	Parameters	
1	 	Start application		
2	 	Login	<i>UserName</i>	<i>Password</i>
3	 	GetCurrentUser	<code>\${current user}</code>	
4	 	AssertEquals	John Smith	<code>\${current user}</code>
5	 	Logout		

## Combining Keywords into Keyword Sequences

Use the **Keyword-Driven Test Editor** to combine keywords, which you want to execute sequentially in multiple keyword-driven tests, into a keyword sequence.

1. Open the keyword-driven test that includes the keywords that you want to combine.

2. In the **Keyword-Driven Test Editor**, press and hold down the `Ctrl` key and then click the keywords that you want to combine.
3. Right-click on the selection and click **Combine**. The **Combine Keywords** dialog box opens.
4. Type a name for the new keyword sequence into the **Name** field.
5. *Optional:* Type a description for the new keyword sequence into the **Description** field.
6. Click **Combine**.

The new keyword sequence opens and is also displayed in the **Keywords** window. You can use the keyword sequence in keyword-driven tests.



**Note:** Like any other keyword, you cannot execute a keyword sequence on its own, but only as part of a keyword-driven test.

## Replaying a Keyword-Driven Test with Specific Variables

Before you can set the values of variables for the execution of a keyword-driven test, you have to create the project.

1. In the **Solution Explorer**, expand the project which includes the keyword-driven tests that you want to execute based on the variables.
2. Right-click the project node and select **Add > New Item**. The **Add New Item** dialog box opens.
3. Select **Installed > Common Items > General** from the item tree.
4. Select **Text File** from the item list.
5. Type `globalvariables.properties` into the **Name** field.
6. Click **Add**. The new properties file opens.
7. Add new lines to the file to specify the variables.

The format for a new variable is:

```
name=value
```

For example, to specify the two variables `user` and `password`, type the following:

```
user=John  
password=john5673
```

For information about the format of a properties file and how you can enter UNICODE characters, for example a space, see [Properties File Format](#).

8. Save the `globalvariables.properties` file.
9. In the **Solution Explorer**, right-click the `globalvariables.properties` file and select **Properties**. The **Properties** view opens.
10. In the **Properties** view, expand the **Build Action** list and select **Embedded Resource**.

Whenever a keyword-driven test in the project is executed from Silk4NET, the variables are used.

## Integrating Silk4NET with Silk Central

Integrate Silk4NET and Silk Central to enable collaboration between technical and less-technical users.

When Silk4NET and Silk Central are integrated and a library with the same name as the active Silk4NET project exists in Silk Central, the **Keywords** view under **Silk4NET > Show Keywords Window** displays all keywords from the Silk Central library in addition to any keywords defined in the active Silk4NET project.

 **Note:** The Silk Central connection information is separately stored for every Silk4NET user, which means every Silk4NET user that wants to work with keywords and keyword sequences from Silk Central must integrate Silk4NET with Silk Central.

Integrating Silk4NET with Silk Central provides you with the following advantages:

- Test management and execution is handled by Silk Central.
- Keywords are stored in the Silk Central database (upload library) and are available to all projects in Silk Central.
- Manual tests can be directly automated in Silk Central and the created keyword-driven tests can be executed in Silk4NET from Silk Central.

 **Note:** In Silk4NET, you can edit and execute keyword-driven tests that are located in Silk4NET, and you can execute keyword-driven tests that are stored in Silk Central. To edit a keyword-driven test, which is stored in Silk Central, open the keyword-driven test in the **Keyword-Driven Test Editor** and click **Edit**.

1. From the menu, select **Silk4NET > Silk Central Configuration**. The **Script Options** dialog box opens.
2. Type the URL of your Silk Central server into the **URL** field.  
For example, if the Silk Central server name is *sctm-server*, and the port for Silk Central is 13450, type `http://sctm-server:13450`.
3. Type a valid user name and password into the corresponding fields.
4. Click **Verify** to verify if Silk4NET can access the Silk Central server with the specified user.
5. Click **OK**.

## Implementing Silk Central Keywords in Silk4NET

Before implementing Silk Central keywords, define the keywords as part of a keyword-driven test in Silk Central.

To implement a Silk Central keyword in Silk4NET:

1. Create a project in Silk4NET with the same name as the keyword library in Silk Central, which includes the keyword-driven test.
2. If the keyword library in Silk Central has no type assigned, click **Silk4NET > Upload Keyword Library** to set the library type.
3. *Optional:* To implement a specific keyword in Silk4NET from Silk Central, open the **Keywords** tab of the library in Silk Central and click **Implement with Silk Test** in the **Actions** column of the keyword.
4. In the Silk4NET menu, click **Silk4NET > Show Keywords Window**.
5. In the **Keywords** window, double-click the keyword-driven test.  
To update the **Keywords** window with any changes from Silk Central, click **Refresh**.
6. In the toolbar, click **Record Actions**.
7. If you have set an application configuration for the current project and you are testing a Web application, the **Select Browser** dialog box opens. Select the browser on which you want to record the keyword.
8. Click **Record**.  
For additional information on recording, see [Recording a Keyword](#).
9. Record the actions for the first unimplemented keyword.
10. When you have recorded all the actions for the current keyword, click **Next Keyword**.
11. To switch between keywords in the **Recording** window, click **Previous Keyword** and **Next Keyword**.
12. Click **Stop**. The **Record Complete** dialog box opens.



**Note:** You cannot delete keywords or change the sequence of the keywords in a keyword-driven test from Silk Central, as these tests are read only in Silk4NET.

## Uploading a Keyword Library to Silk Central

To work with Silk Central, ensure that you have configured a valid Silk Central location. For additional information, see [Integrating Silk4NET with Silk Central](#).

To automate manual tests in Silk Central, upload keywords that you have implemented in a Silk4NET project as a keyword library to Silk Central, where you can then use the keywords to automate manual tests.

1. In Silk4NET, select the project in which the keyword-driven tests reside.
2. Ensure that a library with the same name exists in Silk Central (**Tests > Libraries**).
3. In the menu, select **Silk4NET > Upload Keyword Library**.
4. *Optional:* Provide a description of the changes to the keyword library.
5. *Optional:* Click **Configure** to configure the connection to Silk Central.
6. *Optional:* To see which libraries are available in the connected Silk Central instance, click on the link.
7. Click **Upload**.



**Caution:** If the keyword library in Silk Central is already assigned to a different automation tool or another Silk Test client, you are asked if you really want to change the type of the keyword library. Upload the library only if you are sure that you want to change the type.

Silk4NET creates a keyword library out of all the keywords that are implemented in the project. Then Silk4NET saves the keyword library with the name `library.zip` into the output folder of the project. The library is validated for consistency, and any changes which might break existing tests in Silk Central are listed in the **Upload Keyword Library to Silk Central** dialog box. Finally, Silk4NET uploads the library to Silk Central. You can now use the keywords in Silk Central. Any keyword-driven tests in Silk Central, which use the keywords that are included in the keyword library, automatically use the current implementation of the keywords.

## Uploading a Keyword Library to Silk Central from the Command Line

Upload an external keyword library to Silk Central from a Java-based command line to integrate Silk Central and your keyword-driven tests into your continuous integration build system, for example Jenkins.

To upload your keyword library to Silk Central from a Java-based command line:

1. Select **Help > Tools** in Silk Central and download the **Java Keyword Library Tool**.
2. Call the command line tool that is contained in the downloaded `jar` file with the following arguments:
  - `java`
  - `-jar com.borland.silk.keyworddriven.jar`
  - `-upload`
  - `Library` name of the library in Silk Central to be updated, or created if it does not yet exist.
  - `Package` name of the library package (`zip` archive) to be uploaded.
  - `Hostname:port` of the Silk Central front-end server.
  - `Username` of the Silk Central user.
  - `Password` of the Silk Central user.
  - `Update information`, describing the changes that were applied to the library, in quotes.

- [-allowUsedKeywordDeletion], an optional flag to allow the deletion of keywords that are used in a test or keyword sequence. By default, an error is raised if used keywords are attempted to be deleted.

The following example outlines the command line to upload a library to Silk Central:

```
java -jar com.borland.silk.keyworddriven.jar -upload
"My library" "./output/library.zip" silkcentral:19120 scLogin
scPassword "Build xy: Implemented missing keywords"
```

## Searching for a Keyword

Use the search field in the **Keywords** window to find a specific keyword. When you enter alphanumeric characters, the list is dynamically updated with all existing matches. Tips for searching:

- The search is case-insensitive: doAction will find doaction and DOAction.
- Enter only capital letters to perform a so-called *Camel/Case* search: ECD will find Enter Car Details, Enter Contact Details and EnterContactDetails.
- Keyword and group names are considered: test will find all keywords that contain test and all keywords in groups where the group name contains test.
- ? replaces 0-1 characters: user?test will find userTest and usersTest.
- \* replaces 0-n characters: my\*keyword will find myKeyword, myNewKeyword and my\_other\_keyword.
- <string>. only searches in group names: group. will find all keywords in groups where the group name contains group.
- .<string> only searches in keyword names: .keyword will find all keywords that contain keyword.
- <string>.<string> searches for a keyword in a specific group: group.word will find myKeyword in the group myGroup.
- Use quotes to search for an exact match: 'Keyword' will find Keyword and MyKeyword, but not keyword.

## Filtering Keywords

To find a specific keyword in the current project, you can filter the keywords that are displayed in the **Keywords** window. If an integration with Silk Central is configured, the result includes the relevant keywords from Silk Central.

1. In the menu, click **Silk4NET > Show Keywords Window**. The **Keywords** window opens.
2. In the **Keywords** window, type the name of the keyword that you are searching for into the search field. The **Keywords** window lists all keywords in the current project with the given name.
3. *Optional:* To edit a keyword, hover the mouse cursor over the keyword in the **Keywords** window and click **Go to implementation**.

## Grouping Keywords

To better structure the keywords in a library, you can group them.

This topic shows how you can add a keyword to a specific group. These group names are also used by Silk Central and your keywords are grouped accordingly.

To add a keyword to a specific group:

1. Open the implementation of the keyword.

- a) Open the project in which the keyword is implemented.
  - b) Open the **Keywords** window.
  - c) In the **Keywords** window, select the keyword.
  - d) Click **Go to implementation**.
2. To add all methods in a class to the keyword group, add the keyword group before the start of the class. For example, to add the group calculator to the keywords, type:

```
// VB .NET code  
<KeywordGroup("Calculator")>
```

```
// C# code  
[KeywordGroup("Calculator")]
```

In the **Keywords** window, the displayed keyword name now includes the group. For example, the keyword *Addition* in the group *Calculator* is displayed as `Calculator.Addition`.

# Known Issues

This section identifies any known issues with Silk4NET and their resolutions.

## General Issues

### Object Map Takes a Long Time to Open

If you have a large object map asset it takes a long time to load when you are using .NET 4. Install .NET 4.5 to resolve this issue.

### When a remote desktop or remote desktop connection (RDC) is minimized, Silk Test does not function

When you connect through the remote desktop protocol (RDP) to a desktop, you take ownership of the desktop by attaching to the desktop with your mouse and keyboard. If the desktop is minimized without ownership of the desktop being released, any playback of mouse clicks or keystrokes is undefined.

As a workaround, you could use a VNC-based remote viewing tool. This would allow replay to continue even if the client window is minimized.

### The Open Agent does not start when the Check Point firewall is installed

When you have a Check Point firewall or a Check Point ZoneAlarm firewall installed on your system, the Open Agent cannot be started, because the firewall interrupts the communication between the Agent and the infoservice.

To start the Open Agent, you have to uninstall the Check Point firewall from your system.

### The `modifiers` parameter in the `domDoubleClick` method is ignored

You cannot specify the modifier in the overloaded `domDoubleClick` method. The modifier will not be double-clicked, although you have specified the parameter. The overloaded `domDoubleClick` method, which allows you to specify the modifier, is deprecated. To specify the modifier, you can use the `doubleClick` method, if you are using a client that supports an overloaded method with the `modifiers` parameter, or the `PressKeys` and `ReleaseKeys` methods.

### Silk Test does not support testing Metro-style apps

Silk Test does not support testing Metro-style apps on Microsoft Windows 8, Microsoft Windows 8.1, or Microsoft Windows 10. Metro-style apps are also known as Windows 8 style, Modern UI style, Windows Store style, or Universal Windows Platform (UWP) apps.

### The built-in spell checking in Microsoft Windows 8 might interfere with the replay of tests

The built-in spell checking in Microsoft Windows 8 can be enabled in applications like Internet Explorer 10.

If a word was incorrectly spelled during recording, and you replay typing this word, the spell checker will either mark it, or for commonly misspelled words will automatically fix it, which is the same behaviour a real user would get. If your tests were created on an operating system that did not include the spell checking feature, you might get unexpected results when replaying the tests on Microsoft Windows 8. To disable the spell checking, you can do the following:

1. Press **Windows Key + C**.

2. On the Charm bar, click **Settings**.
3. Select **More PC Settings**.
4. Select **General** to see the Spelling selections.



**Note:** These are system-wide settings, not settings specific to Internet Explorer.

5. Set **Autocorrect misspelled words** to off.
6. Set **Highlight misspelled words** to off.

### **When a .NET application is started from DevPartner Studio (DPS), Silk Test might not recognize it**

To resolve the issue, perform the following steps:

1. Go to the Silk Test installation folder (by default, it's located at: C:\Program Files\Silk\SilkTest).
2. For Windows Forms applications, go to ng\agent\plugins\com.borland.fastxd.techdomain.windowsforms.agent\_<version number>.
3. For Windows Presentation Foundation (WPF) applications, go to ng\agent\plugins\com.microfocus.silktest.techdomain.wpf.agent\_<version number>.
4. In Notepad, open the file plugin.xml, and add the following line to the <loadparameters> section:  

```
<param name="frameworkAssembly">mscorlib.dll</param>
```
5. Go to the ng\agent folder in the Silk Test installation folder (by default, it's located at: C:\Program Files\Silk\SilkTest\ng\agent).
6. In Notepad, open openagent.ini and add -clean as the first line of the file.
7. Log out of the computer, and then log back in. Silk Test works as expected with the application that was started by DevPartner Studio.

### **The highlighting rectangle is out of place when recording clicks on an area of an image**

When you record a click on a part of a complex image, for example an area map, the green highlighting rectangle does not highlight the appropriate area of the image. However, the click will be executed correctly during replay.

### **The Open Agent might not start if Windows Defender is enabled during the installation of Silk Test**

If Windows Defender is enabled on your system during the Silk Test installation, you might not be able to start the Open Agent after the installation is complete. Windows Defender might prevent the hotfix setup from performing some required actions. As a workaround, disable Windows Defender during the Silk Test installation.

### **The IME editor opens out of place when opened from specific locations**

The IME editor opens on the top-left corner of the current screen instead of opening near the text field from which it is opened.

This behavior occurs when opening the IME editor from the following locations:

- The recording sidebar.
- The **Keyword-Driven Test Editor**.
- The **Keywords** window.

### **Silk Test help freezes when you enter characters in the Search box**

The Silk Test help might freeze when you enter characters in the **Search** box on the **Index** tab in a Compiled HTML Help (.chm) file in Microsoft Windows 8.1, Microsoft Windows RT 8.1, or Microsoft Windows Server 2012 R2. To fix this issue, you have to install a Windows update. The update is available from <https://support.microsoft.com/en-us/kb/3080042>.

# Mobile Web Applications

## **Silk4NET does not support frames on Apple Safari**

Silk4NET does not support HTML frames and iframes on Apple Safari on iOS.

## **Chrome for Android 43 or later: Silk4NET does not support zooming and scrolling at the same time**

Recording a mobile web application on Chrome for Android 43 or later, while the mobile web application is zoomed and the top-left corner is not visible on the screen, might not work as expected. If the green rectangles for the controls in a mobile web application are not correctly displayed during recording, zoom-out the mobile web application completely, scroll to the top-left corner of the mobile web application, and refresh the **Recording** window.

# Web Applications

## **Recording with a zoom level different to 100% might not work properly**

Recording a Web application with a zoom level different to 100% might not work as expected. Before recording actions against a Web application, set the zoom level in the browser to 100%.

# Google Chrome

## **Locator recording in windows fails with Google Chrome**

When you are testing a Web application in Google Chrome, locator recording in windows fails when multiple windows are open during application configuration in the Google Chrome instance, in which the application is running. If you close the other Google Chrome windows during application configuration, the error will not appear.

## **Background applications in Google Chrome prevent automation support from loading**

When you want to test a Web application with Google Chrome and the **Continue running background apps when Google Chrome is closed** check box is checked, Silk Test cannot restart Google Chrome to load the automation support.

## **Silk Test cannot record locators in modal dialogs when Windows Aero is disabled**

If Windows Aero functionality is disabled, modal dialogs are not recognized and locators in such dialogs cannot be selected. As a workaround, use the **Locator Spy** or the **Identify Object** dialog box to manually create and verify locators while a modal dialog is displayed.

## **Silk Test does not display embedded PDFs**

With Google Chrome 42 or later, Google Chrome by default blocks the NPAPI plug-in, which is used to display embedded PDFs. Because of this, Silk Test does not display embedded PDFs in Google Chrome 42 or later, but instead downloads the embedded PDFs.

- If you are using Google Chrome 44 or prior, you can unblock the NPAPI plug-in in Google Chrome, by typing the following into the address bar:  
`chrome://flags/#enable-npapi`
- If you are using Google Chrome 45 or later, the NPAPI plug-in is completely removed from Google Chrome, without an option to re-enable it, and all PDFs are downloaded.

## Connection timeouts when executing tests against Google Chrome 49 or prior

When executing tests against Google Chrome 49 or prior on a slow machine, you might experience connection timeouts, causing the tests to fail. The following error message is displayed: Error executing '\*'. Communication with browser automation timed out.

To avoid such connection timeouts, ensure that the test machine has enough processing power. For example, if you are testing on a slow virtual machine (VM), you could enhance the processing power by adding an additional CPU core to the VM.

# Internet Explorer

## Using Google toolbar interferes with recording Web applications

Using the Google toolbar with Internet Explorer 8 interferes with recording locators for Web applications. Turn off the Google toolbar before you record Web applications.

## Microsoft Silverlight Applications

Some Microsoft Silverlight applications cause Internet Explorer to hang when interacting with Silk Test. On 32-bit platforms, refer to MS KB 2564958 (an update to Active Accessibility) to help prevent the issue.

## Locators recorded with Silk Test versions prior to Silk Test 13.5 might no longer work in Internet Explorer

In Silk Test 13.5, we have adapted the normalization of white spaces of the `textContent` attribute in Internet Explorer. This change was made to improve the cross-browser capabilities of Silk Test, and might affect locators which rely on the `textContent` attribute, and which are used in scripts that were recorded with releases prior to Silk Test 13.5.

## The Open Agent cannot have high elevation enabled when UAC is enabled on Microsoft Windows 8 or later and Internet Explorer 11

You cannot test a Web application in Internet Explorer 11 on Microsoft Windows 8 or later and have UAC enabled and run both Internet Explorer and the Open Agent with high elevation.

## Known issues with Input Method Editors (IMEs)

- Silk Test does not record half-width spaces for Japanese input in Internet Explorer 11.
- Silk Test does not record IME input in Internet Explorer 11 in compatibility mode.
- In Japanese IME mode, pressing **Space** will cause Silk Test to record the current IME candidate. Use **Convert** to avoid this issue.

## Internet Explorer might stop working while testing an Applet with a Java version higher than 1.7 update 71

Internet Explorer might stop working while testing an Applet with a Java version higher than 1.7 update 71 (7u71).

## Internet Explorer does not respond during test execution

Internet Explorer 10 or later might become unresponsive during test execution because a thread in Internet Explorer is suspended and creates a deadlock. The root cause of this problem is a new security feature in Internet Explorer.

To solve this issue, disable the security feature.

1. Open the **Registry Editor**.

2. If the **OverrideMemoryProtectionSetting** entry does not exist in the key **HKEY\_CURRENT\_USER\SOFTWARE\Microsoft\Internet Explorer\Main**, create the entry.
3. Set the value of the registry key **HKEY\_CURRENT\_USER\SOFTWARE\Microsoft\Internet Explorer\Main::OverrideMemoryProtectionSetting** to 2.

### The JavaScript alert-handling API methods do not work with an embedded Internet Explorer

The following JavaScript alert-handling methods of the `BrowserWindow` class do not work when testing an embedded Internet Explorer:

- `AcceptAlert` method
- `DismissAlert` method
- `GetAlertText` method
- `IsAlertPresent` method

## Microsoft Edge

### Windows opened out of Microsoft Edge are not supported

Windows which are opened as actual new Microsoft Edge windows, and not as tabs, are not supported. Silk4NET cannot close such windows correctly, and the agent is in an invalid state after closing such a window.

### JavaScript alerts opened in an iframe or frame cannot be closed

Microsoft Edge cannot close the JavaScript alerts `alert()`, `prompt()`, and `confirm()`, if these alerts were opened in an iframe or frame.

### Cannot open the native browser context menu

If a test includes a right click in Microsoft Edge, which opens the native browser context menu, the test will hang. This issue does not occur with HTML menus opened by Microsoft Edge.

## Mozilla Firefox

### Calls into applications using Adobe FlashPlayer do not properly synchronize when using Mozilla Firefox

When you are using Mozilla Firefox with a recent Adobe FlashPlayer version, some calls might not synchronize properly. The following issues might occur:

- Mozilla Firefox might falsely recognize a running script as stalled and a confirmation dialog box might appear asking whether you want to continue the execution of the script, even though the script is running properly.
- Typing characters might not work because `SetFocus` is no longer working correctly.
- The Adobe automation might return an old value although the UI already shows a new value.

If you face one or more of these issues with applications using Adobe FlashPlayer, turn off the `ProtectedMode` in Adobe FlashPlayer. For additional information, see <http://forums.adobe.com/thread/1018071> and read the information provided under *Last Resort*.

# SAP Applications

## **HierarchyHeaderWidth and ColumnOrder Properties of the SAPTree Class are write only**

Other than the automation documentation indicates, the `HierarchyHeaderWidth` and `ColumnOrder` properties of the `SAPTree` class are write only and cannot be read.

Ensure that your scripts use write rather than read with these properties.

## **GetColumnIndexFromName() of the SapTree Class May Fail with an "unspecified error"**

`GetColumnIndexFromName()` of the `SapTree` class may fail with an "unspecified error". This is a known issue in SAP automation.

Check the SAP web site to see if the issue has been resolved.

## **Calling the select() method of the SAPTree Class on a Context menu item may fail**

Calling the `Select()` method of the `SAPTree` class on a Context menu item may fail.

Call `SelectContextMenuItem` on the parent control instead. This problem is a known issue in the SAP automation.

## **The position property for a horizontal scrollbar always returns 1**

The position property for a horizontal scrollbar always returns 1. This is a known issue in SAP automation.

Check the SAP web site to see if the issue has been resolved.

## **The SAPNetPlan class is not supported**

This issue will be resolved in a future release.

## **Replay error occurs when executing an SAP script**

In certain cases, if you record an SAP test and then replay it, the following error might occur: The data necessary to complete this operation is not yet available. This means that Silk4NET is executing the recorded actions too fast.

To solve this issue, you can add sleeps to your test script or you can increase the post replay delay to increase the time that Silk4NET waits after invoking a function or setting a property. For additional information about this option, see *Agent Options*. You could also change the script to use SAP automation to replay the problematic action instead of using the xBrowser technology domain. For example, you could change the action `DomLink.Select` to `SapHTMLViewer.SapEvent`.

## **The method getCurrentRow returns a wrong value with SAPGUI client 7.30**

If you use SAPGUI client 7.30 and you call the method `getCurrentRow`, the method might falsely return -1 instead of the row number.

## **The method resizeWorkingPane is not working correctly with SAPGUI client 7.30**

If you use SAPGUI client 7.30 and you call the method `resizeWorkingPaneEx`, the method will not resize the `workingPane` and calling `getSapWindow().getWidth()` will return a wrong value for the window width.

# Oracle Forms

**Silk4NET does not support testing Oracle Forms with a Java version higher than 1.7 update 60**

Silk4NET does not support testing Oracle Forms with a Java version higher than 1.7 update 60 (7u60).

## Silk4NET

### No TrueLog is generated

If you do not have a TrueLog result file after test execution make sure that:

- The Silk4NET project is executed in the same Visual Studio version as the version in which the project was created. For example, you can only execute a Silk4NET project which is created in Visual Studio 2012 within a Visual Studio 2012 environment. This limitation also applies when you execute the project through the command line or through Team Foundation Server.
- The test class contains the `SilkTestClass` attribute.
- You have write access to the location where the TrueLog file is created.

### Silk4NET displays the message "Unit Test Adapter threw exception... "

If you get the error message `Unit Test Adapter threw exception...` during replay, ensure that the Silk4NET project is executed in the same Visual Studio version as the version in which the project was created. For example, you can only execute a Silk4NET project which is created in Visual Studio 2012 within a Visual Studio 2012 environment. This limitation also applies when you execute the project through the command line or through Team Foundation Server.

### How to migrate Silk4NET projects created in a prior version of Visual Studio to a later version of Visual Studio:

- Open the solution in the prior version of Visual Studio.
- Change the target framework of your Silk4NET projects to the appropriate version of the .NET Framework. For example, to migrate the projects from Visual Studio 2010 to Visual Studio 2012, set the target framework to .NET Framework 4.5.
- Remove the reference to the `UnitTestingExtension` of the prior version of Visual Studio from your Silk4NET projects. For example, if the prior version is Visual Studio 2010, remove the reference to `SilkTest.Ntf.VisualStudio2010.UnitTestingExtension` from your Silk4NET projects.
- Add the reference to the later version of Visual Studio to your Silk4NET projects. For example, to migrate the projects to Visual Studio 2012, add the reference `SilkTest.Ntf.VisualStudio2012.UnitTestingExtension` to your Silk4NET projects.

### When you are using object maps, existing locators that do not start with a slash will no longer work

Locators that include only a class name and that do not start with a slash, for example `PushButton`, will no longer work if object maps exist. This issue might result in breaking existing scripts that were created in a Silk Test version prior to Silk Test 14.0. For the previous example the script will fail with the following error:

Identifier 'PushButton' was not found in the Object Map.

More complex locators that include more than a class name, for example `PushButton[@caption=OK]` will continue to work, even if object maps exist.

To fix this issue, add a // to the start of any such locator. For example, if the locator `PushButton` in the following code does no longer work:

```
PushButton button = mainWindow.find("PushButton");
```

Change the code to:

```
PushButton button = mainWindow.find("//PushButton");
```

### **Silk4NET 17.5 and the Silk Performer 17.5 Visual Studio .NET Add-On cannot share the same instance of Visual Studio**

Silk4NET 17.5 and the Silk Performer 17.5 Visual Studio .NET Add-On, which is called Silk Performer 17.5 Visual Studio .NET Extension in Visual Studio 2015 or later, will not work when they both are installed on the same machine and use the same Visual Studio version.

# Index

- .NET support
  - overview 170
  - Silverlight 184
  - Windows Forms overview 170
  - Windows Presentation Foundation (WPF) overview 176

- 64-bit applications
  - support 224

## A

- Accessibility
  - improving object recognition 105
- action recording
  - merging object map entries 77
- add-ons
  - Google Chrome 211
  - Mozilla Firefox 214
- adding
  - keywords 237
- adding keywords
  - keyword-driven tests 237
- adding multiple images
  - image assets 89
- adding Silk4NET tests
  - Silk4NET projects 21
- admin rights
  - installing 10
  - running 10
- Adobe Flex
  - adding configuration information 131
  - Adobe Air support 127
  - automationName property 134
  - coding containers 137
  - containers 137
  - creating applications 132
  - FlexDataGrid control 127
  - invoking methods 118
  - loading at run-time 131
  - multiview containers 138
  - passing parameters 131
  - passing parameters at runtime 131
  - passing parameters before runtime 131
  - run-time loading 130
  - security settings 140
  - select method, overview 127
  - select method, setting 136
  - testing playback 139
- advanced
  - options 60
- agent options
  - Open Agent 37
- agents
  - configuring ports for Recorder 46
  - configuring ports, information service 45

- options 37
- overview 37
- port numbers 44
- starting 37
- AJAX applications
  - browser recording options, setting 56
  - script hangs 220
- analyzing
  - test results 29
- Android
  - configuring emulator 149
  - enabling USB-debugging 149
  - hybrid applications 148
  - installed apps, testing 157
  - installing USB drivers 148
  - mobile native applications, prerequisites 147
  - mobile web applications, prerequisites 147
  - recommended settings 149
  - releasing devices 162
  - releasing devices, recording 162
  - releasing devices, replay 162
  - testing 147
  - troubleshooting 163
- Android emulator
  - configuring 149
- Apache Flex
  - Component Explorer 117
  - attributes 140, 224
  - automationIndex property 133
  - automationName property 133
  - class definition file 125, 134
  - controls are not recognized 141
  - custom controls 101, 117
  - custom controls, defining 119, 125, 134
  - custom controls, implementing 122
  - customizing scripts 126
  - enabling your application 128
  - Flash player settings 116
  - initializing, applications 138
  - invoking methods 118
  - invoking methods for custom controls 121
  - linking automation packages 128
  - overview 116
  - precompiling the application 129
  - recording, applications 138
  - select method, setting 136
  - styles 139
  - testing 117
  - testing multiple applications 126
  - workflow 138
- Apache Flex applications
  - custom attributes 71, 133
- API playback
  - comparing to, native playback 203
- Apple Safari
  - connection string 206
  - information service, installing 155, 207, 209
  - limitations 208

- prerequisites 207
- running multiple tests 209
- support 198
- testing 207
- application configurations
  - adding 50
  - definition 50
  - errors 53
  - keyword-driven tests 235
  - modifying 50
  - removing 50
  - troubleshooting 53
- assets
  - opening from a script 90
- attribute types
  - Apache Flex 140, 224
  - Java AWT 141, 225
  - Java Swing 141, 225
  - Java SWT 145, 225
  - Oracle Forms 143
  - overview 224
  - SAP 195, 225
  - Silverlight 185, 226
  - Web applications 223, 227
  - Windows 176, 228
  - Windows Forms 170, 228
  - xBrowser 223, 227
- attribute values
  - finding with Locator Spy 27

## B

- base state
  - definition 48
  - executing 49
  - keyword-driven tests 235
  - modifying 48
- basestate
  - about 48
- best practices
  - scripts, creating 26
- browser
  - defining, playback 200
- browser configuration settings
  - xBrowser 204
- browser type
  - Chrome for Android, setting 166
  - viewing current 219
  - viewing current, GetProperty 219
- browsers
  - options, setting 56
  - starting, scripts 222
- browsertype
  - Chrome for Android, setting 166
  - using 219

## C

- calling dlls
  - example 94
  - scripts 93
- Chrome

- configuration settings 204
- cross-browser scripts 221
- extensions, testing 211
- known issues 250
- locators 221
- prerequisites 211
- recording tests 24
- testing 210
- user data directories, testing 212
- Chrome for Android
  - browser type, setting 166
  - support 198
- class names
  - finding with Locator Spy 27
- classes
  - exposing 58
  - ignoring 58
- Click
  - mobile web 169
- combining
  - keywords 237
- Component Explorer
  - Apache Flex 117
- configuring ports
  - information service, clients 45
  - Open Agent 45
- connection string
  - desktop browsers, remote 206
  - mobile devices 158
- contact information 14
- continuous integration
  - uploading keyword libraries 245
- controlling line execution
  - debugging, scripts 114
- creating
  - keyword-driven tests 233
- creating Silk4NET projects
  - Visual Studio 19
- creating stable locators
  - overview 69
- creating visual execution logs
  - TrueLog 32
  - TrueLog Explorer 32
- cross browser testing
  - Apple Safari 207
  - Apple Safari, limitations 208
  - current browser type, viewing 219
  - FAQs 218
  - Google Chrome 210
  - Microsoft Edge 216
  - Microsoft Edge, limitations 216
  - mouse move preferences, setting 204
  - Mozilla Firefox 213
  - object maps, using 78
  - object recognition 202
  - overview 198
  - recording locators 221
  - scrolling 218
  - test objects 201
  - wrong timestamps, logs 219
- cross-browser testing
  - Apple Safari 207

- Apple Safari, limitations 208
- connection string 206
- current browser type, viewing 219
- FAQs 218
- Google Chrome 210
- Microsoft Edge 216
- Microsoft Edge, limitations 216
- mouse move preferences, setting 204
- Mozilla Firefox 213
- object maps, using 78
- object recognition 202
- overview 198
- recording locators 221
- remote locations, adding 52
- scrolling 218
- test objects 201
- wrong timestamps, logs 219
- current browser type
  - viewing 219
- custom attributes
  - Apache Flex applications 71, 133
  - controls 71
  - setting 57
  - Web applications 72, 223
  - Windows Forms applications 73, 170
  - WPF applications 73, 177
- custom controls
  - adding code to AUT 99
  - adding code to AUT, FAQs 101
  - Apache Flex, defining 125, 134
  - Apache Flex, implementing 122
  - creating custom classes 104
  - dialog box 105
  - dynamic invoke, FAQs 98
  - dynamically invoking Apache Flex 121
  - Flex, defining 119
  - injected code is not used in AUT 101
  - invoke call returns unexpected string 98
  - managing 102
  - overview 97
  - supporting 104
  - testing (Apache Flex) 101, 117
- custom properties
  - controls 71
- Customer Care 14

## D

- debugging
  - controlling line execution, scripts 114
  - scripts 113
  - scripts, stepping through from selected point 114
  - scripts, stopping playback at selected points 114
  - stepping through, scripts 113
- deleting
  - keywords 237
- deleting scripts
  - object map items 86
- device not connected
  - mobile 163
- Dialog
  - not recognized 218

- dlls
  - aliasing names 97
  - calling conventions 97
  - calling from within a Visual Basic script 93
  - example call 94
  - function declaration syntax 94
  - passing arguments to functions 95
  - passing string arguments to functions 96
- downloads 14
- dynamic invoke
  - adding code to AUT, FAQs 101
  - FAQs 98
  - input argument types do not match 101
  - overview 98
  - simplify scripts 99
  - unexpected return value 98
- dynamic locator attributes
  - about 230
- dynamically invoking methods
  - Apache Flex 118
  - Apache Flex custom controls 121
  - Java AWT 142, 145
  - Java Swing 142, 145
  - Java SWT 142, 145
  - SAP 196
  - SAP controls 197
  - Silverlight 186
  - Windows Forms 171
  - Windows Presentation Foundation (WPF) 178
- DynamicInvoke
  - Apache Flex 118
  - Java AWT 142, 145
  - Java Swing 142, 145
  - SAP 196
  - Silverlight 186
  - Windows Forms 171
  - Windows Presentation Foundation (WPF) 178

## E

- Eclipse
  - troubleshooting 146
- Eclipse RCP
  - support 144
- Edge
  - connection string 206
  - limitations 216
  - locators 221
  - recording tests 23
  - remote testing 217
  - testing 216
- editing
  - remote locations 52
- Emulator
  - defining, playback 157
- emulators
  - testing 147
- enabling TrueLog
  - TrueLog Explorer 32
- excluded characters
  - recording 25
  - replay 25

- executing keyword-driven tests
  - variables 243
- exposing
  - WPF classes 58
- extensions
  - Google Chrome 211
  - Mozilla Firefox 214

## F

- FAQs
  - adding code, AUT 101
  - cross-browser testing 218
  - dynamic invoke 98
  - object maps 86
- filtering
  - keywords 246
- Firefox
  - configuration settings 204
  - cross-browser scripts 221
  - extensions, testing 214
  - limitations 214
  - locators 221
  - profiles, testing 214
  - recording tests 24
  - testing 213
- firewalls
  - port numbers 45
  - resolving conflicts 44
- Flash player
  - opening applications in 116
  - security settings 140
- Flex
  - adding configuration information 131
  - Adobe Air support 127
  - attributes 140, 224
  - automationIndex property 133
  - automationName property 133, 134
  - class definition file 125, 134
  - Component Explorer 117
  - containers 137
  - creating applications 132
  - custom controls 101, 117
  - custom controls, defining 119, 125, 134
  - custom controls, implementing 122
  - customizing scripts 126
  - enabling your application 128
  - Flash player settings 116
  - FlexDataGrid control 127
  - initializing, applications 138
  - invoking methods 118
  - invoking methods for custom controls 121
  - linking automation packages 128
  - loading at run-time 131
  - multiview containers 138
  - overview 116
  - passing parameters 131
  - passing parameters at runtime 131
  - passing parameters before runtime 131
  - precompiling the application 129
  - recording, applications 138
  - run-time loading 130

- security settings 140
- select method, overview 127
- select method, setting 136
- styles 139
- testing 117
- testing multiple applications 126
- testing playback 139
- workflow 138
- frequently asked questions
  - adding code, AUT 101
  - cross-browser testing 218
  - dynamic invoke 98
  - object maps 86

## G

- getting started
  - Silk4NET 18
- Google Chrome
  - configuration settings 204
  - extensions, testing 211
  - known issues 250
  - limitations 212
  - prerequisites 211
  - support 198
  - testing 210
  - user data directories, testing 212
- grouping
  - keywords 246
  - object map items 85
- GWT
  - locating controls 70

## H

- hidden
  - input fields 222
- hybrid applications
  - Android 148
  - iOS 154

## I

- identifiers
  - stable 69
- identifying controls
  - dynamic locator attributes 230
  - Locator Spy 74
- identifying objects
  - overview 63
- ignoring
  - classes 58
- image assets
  - creating 88
  - multiple images, adding 89
  - overview 88
  - using in other projects 76, 91
- image checks
  - overview 90
- image click recording
  - overview 87

- image clicks
  - recording 87
- image recognition
  - enabling 87
  - methods 87
  - overview 87
- image verifications
  - adding during recording 91
  - creating 90
  - overview 90
  - using in other projects 76, 91
- implementing
  - keywords 237
- improving object recognition
  - Accessibility 105
- information service
  - communication with Open Agent 44
  - configuring ports, clients 45
  - Mac, installing 155, 207, 209
- initializing
  - Apache Flex applications 138
- innerHTML
  - xBrowser 220
- innerText
  - xBrowserf 220
- input argument types do not match
  - dynamic invoke 101
- input fields
  - finding 222
- installed apps
  - Android, testing 157
  - iOS, testing 157
- installing
  - information service, Mac 155, 207, 209
  - privileges required 10
- installing USB drivers
  - Android 148
- integrations
  - configuring Silk Central location 243
- Internet Explorer
  - configuration settings 204
  - cross-browser scripts 221
  - known issues 251
  - link.select focus issue 219
  - locators 221
  - misplaced rectangles 220
  - support 198
- Internet Explorer 10
  - unexpected Click behavior 221
- invalidated-handle error
  - troubleshooting 222
- invoke
  - Java AWT 142, 145
  - Java SWT 142, 145
  - SAP 196
  - Silverlight 186
  - Swing 142, 145
  - Windows Forms 171
  - Windows Presentation Foundation (WPF) 178
- Invoke method
  - callable methods 98
- InvokeMethods

- Apache Flex 118
- Java AWT 142, 145
- Java Swing 142, 145
- SAP 196
- Silverlight 186
- Windows Forms 171
- Windows Presentation Foundation (WPF) 178
- iOS
  - apps, preparing for testing 154
  - devices, preparing 154
  - hybrid applications 154
  - information service, installing 155, 207, 209
  - installed apps, testing 157
  - mobile native applications, prerequisites 150
  - mobile web applications, prerequisites 150
  - multiple devices 156
  - multiple Simulators 156
  - native app, Simulator 152
  - native app, testing 151
  - recommended settings 156
  - releasing devices 162
  - releasing devices, recording 162
  - releasing devices, replay 162
  - testing 150
  - web app, Simulator 153
  - web app, testing 153

## J

- Java AWT
  - attribute types 141, 225
  - attributes 141, 225
  - invoking methods 142, 145
  - overview 141
- Java AWT/Swing
  - priorLabel 143
- Java Swing
  - attributes 141, 225
  - invoking methods 142, 145
  - overview 141
- Java SWT
  - attribute types 145, 225
  - custom attributes 57
  - invoking methods 142, 145
  - support 144
  - troubleshooting 146
- Java SWT Class Reference 144

## K

- keyword libraries
  - uploading 245
- keyword sequences
  - creating 242
  - parameters 240
- keyword-driven
  - testing 231
- keyword-driven test editor
  - recommended keywords 239
- keyword-driven testing
  - advantages 231
  - keyword recommendations, algorithm 239

- marking test methods 236
- overview 231
- parameters, example 241

keyword-driven tests

- adding keywords 237
- application configurations 235
- base state 235
- creating 233
- editing 237
- implementing keywords 235
- implementing Silk Central keywords 244
- keywords, searching 246
- recording 234
- removing keywords 237
- specifying variables, execution 243
- uploading keywords, Silk Central 245

#### keywords

- about 232
- adding 237
- combining 237, 242
- deleting 237
- filtering 246
- finding in project 246
- grouping 246
- implementing 235, 237
- managing 237
- marking test methods 236
- nesting 237
- opening 237
- parameters 237, 240
- parameters, example 241
- recording 236
- replacing 237
- sequences 237
- uploading to Silk Central 245

#### known issues

- about 248
- general issues 248
- Google Chrome 250
- Internet Explorer 251
- Microsoft Edge 252
- mobile web applications 250
- Mozilla Firefox 252
- Oracle Forms 254
- SAP 253
- Silk4NET 254
- web applications 250

## L

#### Lab Manager

- agent settings, configuring 47

#### libraries

- uploading 245

#### licensing

- available license types 9

#### limitations

- Apple Safari 208
- Google Chrome 212
- Microsoft Edge 216
- mobile web applications 167
- Mozilla Firefox 214

- native mobile applications 168

- Windows 10 224

#### LoadAssembly

- assembly cannot be copied 101

#### locating controls

- GWT example 70
- siblings example 70

#### locator attributes

- dynamic 230
- excluded characters 25
- recording options, setting 56
- Rumba controls 194, 227
- Silverlight controls 185, 226
- WPF controls 176, 228

#### locator generator

- configuring for xBrowser 206

#### Locator Spy

- adding locators to test methods 27
- adding object map items to test methods 27
- overview 74

#### locators

- basic concepts 63
- customizing 68
- incorrect in xBrowser 220
- mapping 75
- modifying in object maps 80
- navigating to object map entry in scripts 84
- object types 63
- search scopes 63
- supported constructs 64
- supported subset 66
- syntax 64
- unsupported constructs 64
- using attributes 64
- xBrowser 221

## M

#### Mac

- Apple Safari, prerequisites 207
- Apple Safari, testing 207
- information service, installing 155, 207, 209

#### managing

- keywords 237

#### manually creating

- object maps 86

#### merging

- object maps 86

#### Microsoft Accessibility

- improving object recognition 105

#### Microsoft Edge

- connection string 206
- known issues 252
- limitations 216
- recording tests 23
- remote testing 217
- support 198
- testing 216

#### missing peripherals

- test machines 10

#### mobile

- troubleshooting 163

- mobile applications
  - recording 157
  - testing 146
- mobile browsers
  - limitations 167
- mobile device
  - defining, playback 157
- mobile devices
  - interacting with 161
  - performing actions against 161
- mobile native applications
  - limitations 168
- mobile recording
  - about 157
- mobile testing
  - Android 147
  - connection string 158
  - iOS 150
  - native app, iOS Simulator 152
  - overview 146
  - releasing devices 162
  - remote locations, adding 52
  - replay, parallel 28
  - web app, iOS 153
  - web app, iOS Simulator 153
- mobile testing devices
  - native app, iOS 151
- mobile web
  - Click 169
  - iOS 153
  - known issues 250
  - legacy tests 169
- mobile web applications
  - Android, prerequisites 147
  - iOS, prerequisites 150
  - limitations 167
- mouse move actions
  - recording 55
- mouse move preferences
  - setting, cross-browser testing 204
- Mozilla Firefox
  - configuration settings 204
  - extensions, testing 214
  - known issues 252
  - limitations 214
  - profiles, testing 214
  - recording tests 24
  - support 198
  - supported versions, new 17
  - testing 213
- multiple agents
  - single machine 110
- multiple applications
  - single machine 110
  - testing 54
- multiple devices
  - iOS 156
- multiple images
  - adding, image assets 89
- multiple Simulators
  - iOS 156

## N

- native mobile applications
  - Android, prerequisites 147
  - iOS, prerequisites 150
  - limitations 168
- native playback
  - comparing to, API playback 203
- native user input
  - advantages 203
- nesting
  - keywords 237
- network address translation (NAT)
  - configuring 47

## O

- object map items
  - adding 82
  - copying 82
  - deleting 85
  - finding errors 84
  - grouping 85
  - highlighting 83
  - identifying 80, 83
  - locating in test application 83
  - modifying locators 80
  - renaming 79
  - updating from test application 81
- object maps
  - adding items 82
  - advantages 76
  - benefits 76
  - best practices 85
  - copying items 82
  - deleting items 85
  - deleting, scripts 86
  - FAQs 86
  - grouping items 85
  - manually creating 86
  - merging 86
  - merging during action recording 77
  - modifying 79
  - navigate from locator to object map in a script 84
  - opening from a script 83
  - overview 75
  - recording 76
  - renaming items 79
  - turning off 76
  - turning on 76
  - using in other projects 76, 91
  - web applications 78
  - xBrowser 78
- object recognition
  - creating stable locators 68
  - custom attributes 71
  - Exists method 67
  - FindAll method 68
  - identifying multiple objects 68
  - improving with Accessibility 105
  - overview 63
  - using attributes 64

- using the Find method 67
- object types
  - locators 63
- objects
  - checking for existence 67
  - locating 63
- Open Agent
  - configuring ports, information service 45
  - connection port, configuring 45
  - location 44
  - network address translation (NAT), configuring 47
  - options 37
  - overview 37
  - port numbers 44
  - starting 37
  - starting from script 37
  - stopping from script 37
  - testing, remote 46
- opening
  - keywords 237
- OPT\_ALTERNATE\_RECORD\_BREAK
  - options 55
- OPT\_ENABLE\_ACCESSIBILITY
  - option 60
- OPT\_ENSURE\_ACTIVE\_OBJDEF
  - option 59
- OPT\_LOCATOR\_ATTRIBUTES\_CASE\_SENSITIVE
  - option 60
- OPT\_RECORD\_MOUSEMOVE\_DELAY
  - options 55
- OPT\_RECORD\_MOUSEMOVES
  - options 55
- OPT\_RECORD\_SCROLLBAR\_ABSOLUT
  - options 55
- OPT\_REMOVE\_FOCUS\_ON\_CAPTURE\_TEXT
  - option 60
- OPT\_REPLAY\_MODE
  - option 59
- OPT\_RESIZE\_APPLICATION\_BEFORE\_RECORDING
  - options 55
- OPT\_WAIT\_RESOLVE\_OBJDEF
  - options, synchronization 58
- OPT\_WAIT\_RESOLVE\_OBJDEF\_RETRY
  - options, synchronization 58
- OPT\_XBROWSER\_RECORD\_LOWLEVEL
  - options 56
- OPT\_XBROWSER\_SYNC\_EXCLUDE\_URLS
  - options, synchronization 58
- OPT\_XBROWSER\_SYNC\_MODE
  - options, synchronization 58
- OPT\_XBROWSER\_SYNC\_TIMEOUT
  - options, synchronization 58
- options
  - advanced 60
  - Playback Status dialog box, setting 31
  - synchronization, setting 58
- Oracle Forms
  - about 143
  - attributes 143
  - known issues 254
  - prerequisites 143
  - supported Java versions 254

supported versions 143

## P

- page synchronization
  - xBrowser 202
- parallel replay
  - mobile tests 28
- parameters
  - handling, keywords 240
- pause recording
  - shortcut key combination 55
- playback
  - Playback Status dialog box, setting options 31
  - selecting browser 200
  - selecting device 157
- port conflicts
  - resolving 46
- ports
  - configuring, information service 45
  - Open Agent 44
  - Recorder 46
- pre-fill
  - setting during recording and replaying 184
- prerequisites
  - Android, mobile web applications 147
  - Android, native mobile applications 147
  - Apple Safari 207
  - Google Chrome 211
  - iOS, mobile web applications 150
  - iOS, native mobile applications 150
- printing
  - scripts 115
- priorLabel
  - Java AWT/Swing technology domain 143
  - Win32 technology domain 198
- privileges required
  - installing Silk Test 10
  - running Silk Test 10
- product suite
  - components 12
- Product Support 14
- profiles
  - Mozilla Firefox 214
- project dependencies
  - adding 76, 91
- projects
  - about 19
  - adding Silk4NET tests 21
  - creating in Visual Studio 19

## R

- recognizing objects
  - xBrowser 202
- recommendations
  - algorithm 239
- recommended keywords
  - keyword-driven test editor 239
- Recorder
  - configuring ports 46
- recording

- actions into existing tests 93
- adding image verifications 91
- Apache Flex applications 138
- available actions 25
- keyword-driven tests 234
- keywords 236
- mobile applications 157
- object maps 76
- preferences 55
- releasing devices 162
- setting pre-fill 184
- Silk4NET tests 22
- recording actions
  - existing tests 93
- recording options
  - browser, setting 56
- recording tests
  - Google Chrome 24
  - Microsoft Edge 23
  - Mozilla Firefox 24
- releasing devices
  - mobile testing 162
  - recording 162
  - replay 162
- remote agent
  - about 46
- remote browser testing
  - connection string 206
- remote locations
  - adding 52
  - editing 52
- remote testing
  - Microsoft Edge 217
  - Open Agent 46
- removing keywords
  - keyword-driven tests 237
- replacing
  - keywords 237
- replay
  - Dialog not recognized 218
  - options 59
  - Playback Status dialog box, setting options 31
  - releasing devices 162
  - selecting browser 200
  - selecting device 157
- replaying
  - setting pre-fill 184
- replaying tests
  - remote machines 46
- result comments
  - adding to scripts 109
- results
  - no files written 33
- Rumba
  - about 193
  - enabling and disabling support 193
  - locator attributes 194, 227
  - Unix display 195
  - using screen verifications 194
- Rumba locator attributes
  - identifying controls 194, 227
- running multiple tests

- Apple Safari 209
- running tests
  - Silk4NET 28
  - stopping 28

## S

- Safari
  - connection string 206
  - limitations 208
  - prerequisites 207
  - running multiple tests 209
  - testing 207
- sample scripts
  - location 62
  - using 62
- SAP
  - attribute types 195, 225
  - class reference 195
  - custom attributes 57
  - invoking methods 196
  - known issues 253
  - overview 195
  - security settings 197
- SAP controls
  - dynamically invoking methods 197
- scripts
  - adding result comments 109
  - adding verifications while recording 27
  - creating, best practices 26
  - debugging 113
  - debugging, controlling line execution 114
  - marking tests as keywords 236
  - navigate from locator to object map 84
  - object mapping 75
  - printing 115
  - reliability 113
  - specifying options 55
  - stepping through, debug mode 113
  - stepping through, from selected point 114
  - stopping playback, selected points 114
- scroll events
  - recording absolute values 55
- scrolling
  - cross-browser testing 218
- search scopes
  - locators 63
- searching
  - keywords, keyword-driven tests 246
- security settings
  - SAP 197
- select application
  - dialog box 51
- Select method
  - Apache Flex, setting 136
- serial number 14
- SetText
  - browser recording options, setting 56
- setting
  - mouse move preferences, cross-browser testing 204
- setting browser
  - playback 200

- setting browser options
  - SetText 56
  - TypeKeys 56
- setting mobile device
  - playback 157
- settings
  - Playback Status dialog box 31
- siblings
  - locating 70
- Silk Central
  - configuring location 243
  - uploading keywords 245
- Silk Central keywords
  - implementing 244
- Silk Performer
  - measure execution time 109
- Silk4NET
  - about 10
  - basic workflow 18
  - known issues 254
  - manually creating tests 25
  - tests 21
- Silk4NET projects
  - adding tests 21
- Silk4NET tests
  - manually creating 25
  - recording 22
  - running 28
- Silverlight
  - attribute types 185, 226
  - class reference 185
  - invoking methods 186
  - locator attributes 185, 226
  - overview 184
  - scrolling 187
  - support 184
  - troubleshooting 188
- Simulator
  - defining, playback 157
  - mobile web applications, testing 153
  - native app, testing 152
  - testing 151
- sleep
  - adding to tests 109
- slowing down
  - tests 109
- specifying options
  - scripts 55
- stable identifiers
  - about 69
- stable locators
  - creating 69
- starting browsers
  - replay 222
- starting Open Agent
  - scripts 37
- stepping through
  - scripts, debug mode 113
  - scripts, selected point 114
- stopping
  - running tests 28
- stopping Open Agent

- scripts 37
- stopping playback
  - scripts, selected points 114
- styles
  - in Flex applications 139
- supported Java versions
  - Oracle Forms 254
- SupportLine 14
- Swing
  - attributes 141, 225
  - invoking methods 142, 145
  - overview 141
- synchronization
  - about 29
  - changing settings 29
  - options, setting 58
  - wrong timestamps 219
  - xBrowser 202

## T

- Team Foundation Server
  - locating TrueLogs 36
  - using with Silk4NET tests 35
- test automation
  - obstacles 10
  - synchronization 29
- test machines
  - missing peripherals 10
- test methods
  - adding locators 27
  - adding object map items 27
  - marking as keywords 236
- test scripts
  - creating, best practices 26
- testing Apple Safari
  - information service, installing 155, 207, 209
- testing custom controls
  - adding code to AUT 99
- tests
  - analyzing results 29
  - enhancing 93
  - recording actions 93
  - Silk4NET 21
  - slowing down 109
  - stopping during execution 28
- text click recording
  - overview 107
- text recognition
  - overview 107
- textContent
  - xBrowser 220
- TFS
  - using with Silk4NET tests 35
- timestamps
  - wrong, cross-browser tests 219
- transparent classes
  - setting 58
- troubleshooting
  - application configurations 53
  - Eclipse 146
  - invalidated-handle error 222

- Java SWT 146
- mobile 163
- Silverlight 188
- XPath 73
- TrueLog
  - change TrueLog location 33
  - configuring 55
  - creating visual execution logs 32
  - enabling 32, 55
  - no results written 33
  - replacement characters for non-ASCII 33
  - wrong non-ASCII characters 33
- TrueLog Explorer
  - configuring 55
  - creating visual execution logs 32
  - enabling 55
  - enabling TrueLog 32
- TrueLogs
  - Team Foundation Server 36
- TypeKeys
  - browser recording options, setting 56

## U

- unexpected Click behavior
  - Internet Explorer 221
- Unicode content
  - support 107
- Unix display
  - Rumba 195
- upload app
  - Mac 147
- uploading
  - keyword libraries 245
  - libraries 245
- usage data collection
  - disabling 13
  - enabling 13
- user data directories
  - Google Chrome 212

## V

- variables
  - executing keyword-driven tests 243
- verification logic
  - adding to scripts while recording 27
- verifications
  - adding to scripts 27
- virtual machines
  - network address translation (NAT), configuring 47
- Visual Basic
  - calling dlls from within a script 93
- Visual COBOL
  - about 189
  - example 189
  - supported versions 189

## W

- web applications

- known issues 250
- Web applications
  - custom attributes 57, 72, 223
  - supported attributes 223, 227
  - xBrowser test objects 201
- WebSync 14
- Win32
  - priorLabel 198
- Win32 Class Reference 198
- Windows
  - 64-bit application support 224
  - attribute types 176, 228
- Windows 10
  - limitations 224
- Windows API-based
  - 64-bit application support 224
- Windows applications
  - custom attributes 57
- Windows Forms
  - 64-bit application support 224
  - attribute types 170, 228
  - class reference 170
  - custom attributes 57
  - invoking methods 171
  - overview 170
- Windows Forms applications
  - custom attributes 73, 170
- Windows Presentation Foundation (WPF)
  - 64-bit application support 224
  - class reference 176
  - custom controls 178
  - exposing classes 183
  - invoking methods 178
  - locator attributes 176, 228
  - overview 176
  - WPFItemsControl class 178
- Windows-API
  - support 197
- WinForms applications
  - custom attributes 73, 170
- works order number 14
- WPF
  - 64-bit application support 224
  - class reference 176
  - classes, exposing 58
  - custom controls 178
  - exposing classes 183
  - invoking methods 178
  - locator attributes 176, 228
  - WPFItemsControl class 178
- WPF applications
  - custom attributes 57, 73, 177
- WPF locator attributes
  - identifying controls 176, 228
- wrong timestamps
  - logs, cross-browser tests 219

## X

- xBrowser
  - Apple Safari 207
  - attribute types 223, 227

- browser configuration settings 204
- Chrome for Android, setting 166
- class and style not in locators 221
- class reference 224
- configuring locator generator 206
- cross-browser scripts 221
- current browser type, viewing 219
- custom attributes 57
- Dialog not recognized 218
- DomClick not working like Click 218
- exposing functionality 219
- FAQs 218
- FieldInputField.DomClick not opening dialog 218
- font type verification 219
- Google Chrome 210
- innerHTML 220
- innerText 220
- innerText not being used in locators 219
- Internet Explorer misplaces rectangles 220
- link.select focus issue 219
- Microsoft Edge 216
- mouse move preferences, setting 204
- mouse move recording 220
- Mozilla Firefox 213
- navigating to new pages 220
- object maps, using 78
- object recognition 202
- overview 198
- page synchronization 202
- playback, comparing API and native 203
- recording an incorrect locator 220
- recording locators 221
- scrolling 218
- test objects 201
- textContent 220
- wrong timestamps, logs 219
- xBrowser testing
  - Apple Safari, limitations 208
  - current browser type, viewing 219
  - Microsoft Edge, limitations 216
- XPath
  - creating query strings 74
  - troubleshooting 73