



Artix™

WSDL Extension Reference

Version 4.0, March 2006

IONA Technologies PLC and/or its subsidiaries may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this publication. Except as expressly provided in any written license agreement from IONA Technologies PLC, the furnishing of this publication does not give you any license to these patents, trademarks, copyrights, or other intellectual property. Any rights not expressly granted herein are reserved.

IONA, IONA Technologies, the IONA logo, Orbix, Orbix Mainframe, Orbix Connect, Artix, Artix Mainframe, Artix Mainframe Developer, Mobile Orchestrator, Orbix/E, Orbacus, Enterprise Integrator, Adaptive Runtime Technology, and Making Software Work Together are trademarks or registered trademarks of IONA Technologies PLC and/or its subsidiaries.

Java and J2EE are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. CORBA is a trademark or registered trademark of the Object Management Group, Inc. in the United States and other countries. All other trademarks that appear herein are the property of their respective owners.

While the information in this publication is believed to be accurate, IONA Technologies PLC makes no warranty of any kind to this material including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. IONA shall not be liable for errors contained herein, or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

COPYRIGHT NOTICE

No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, photocopying, recording or otherwise, without prior written consent of IONA Technologies PLC. No third-party intellectual property right liability is assumed with respect to the use of the information contained herein. IONA Technologies PLC assumes no responsibility for errors or omissions contained in this publication. This publication and features described herein are subject to change without notice.

Copyright © 1999-2006 IONA Technologies PLC. All rights reserved.

All products or services mentioned in this publication are covered by the trademarks, service marks, or product names as designated by the companies that market those products.

Updated: 24-Apr-2006

Contents

Preface	ix
What is Covered in this Book	ix
Who Should Read this Book	ix
How to Use this Book	ix
The Artix Library	ix
Getting the Latest Version	xii
Searching the Artix Library	xii
Artix Online Help	xii
Artix Glossary	xiii
Additional Resources	xiii
Document Conventions	xiii

Part I Bindings

SOAP Binding	3
SOAP Extensions	4
soap:binding	4
soap:operation	5
soap:body	6
soap:header	8
soap:fault	9
MIME Extensions	10
Namespace	10
mime:multipartRelated	10
mime:part	10
mime:content	11
CORBA Binding and Type Map	13
CORBA Binding Extension Elements	14
Namespace	14
Primitive Type Mapping	14
corba:binding	16

corba:operation	16
corba:param	17
corba:return	17
corba:raises	18
CORBA Type Map Extension Elements	19
corba:typeMapping	19
corba:struct	20
corba:member	20
corba:enum	21
corba:enumerator	22
corba:fixed	22
corba:union	24
corba:unionbranch	24
corba:case	25
corba:alias	26
corba:array	27
corba:sequence	28
corba:exception	29
corba:anonsequence	30
corba:anonstring	32
corba:object	33
Tuxedo FML Binding	39
Namespace	39
FML\XMLSchema Support	39
tuxedo:binding	40
tuxedo:fieldTable	40
tuxedo:field	41
tuxedo:operation	41
Fixed Binding	43
Namespace	43
fixed:binding	43
fixed:operation	44
fixed:body	44
fixed:field	45
fixed:enumeration	48
fixed:choice	49

fixed:case	50
fixed:sequence	52
Tagged Binding	55
Namespace	55
tagged:binding	55
tagged:operation	57
tagged:body	57
tagged:field	58
tagged:enumeration	58
tagged:sequence	59
tagged:choice	61
tagged:case	62
TibrvMsg Binding	65
Namespace	65
TIBRVMSG to XMLSchema Type Mapping	65
tibrv:binding	67
tibrv:operation	68
tibrv:input	68
tibrv:output	70
tibrv:array	71
tibrv:msg	74
tibrv:field	75
tibrv:context	76
XML Binding	79
Namespace	79
xformat:binding	79
xformat:body	80
Part II Ports	
HTTP Port	83
Standard WSDL Elements	84
http:address	84

soap:address	84
Artix Extension Elements	85
Namespace	85
http-conf:client	85
http-conf:server	88
Attribute Details	91
AuthorizationType	91
Authorization	91
Accept	91
AcceptLanguage	92
AcceptEncoding	93
ContentType	93
ContentEncoding	94
Host	94
Connection	95
CacheControl	95
BrowserType	98
Referer	98
ProxyServer	99
ProxyAuthorizationType	99
ProxyAuthorization	99
UseSecureSockets	100
RedirectURL	100
ServerCertificateChain	100
CORBA Port	101
Namespace	101
corba:address	101
corba:policy	102
IIOP Tunnel Port	103
Namespace	103
iiop:address	103
iiop:payload	104
iiop:policy	104
WebSphere MQ Port	107
Artix Extension Elements	108

Namespace	108
mq:client	108
mq:server	110
Attribute Details	113
Server_Client	113
AliasQueueName	114
UsageStyle	116
CorrelationStyle	116
AccessMode	117
MessagePriority	118
Delivery	119
Transactional	119
ReportOption	120
Format	122
JMS Port	125
Namespace	125
jms:address	125
jms:JMSNamingProperty	126
jms:client	127
jms:server	127
Tuxedo Port	129
Namespace	129
tuxedo:server	129
tuxedo:service	129
tuxedo:input	130
Tibco/Rendezvous Port	131
Artix Extension Elements	132
Namespace	132
tibrv:port	132
Attribute Details	136
bindingType	136
callbackLevel	136
responseDispatchTimeout	137
transportService	137
transportNetwork	137

cmTransportServerName	137
cmQueueTransportServerName	137
File Transfer Protocol Port	139
Namespace	139
ftp:port	139
ftp:properties	140
ftp:property	140
Part III Other Extensions	
Routing	145
Namespace	145
routing:expression	145
routing:route	146
routing:source	146
routing:query	147
routing:destination	147
routing:transportAttribute	148
routing>equals	149
routing:greater	150
routing:less	150
routing:startswith	151
routing:endswith	151
routing:contains	152
routing:empty	152
routing:nonempty	153
Transport Attribute Context Names	153
Security	155
Namespace	155
bus-security:security	155
Codeset Conversion	159
Namespace	159
i18n-context:client	159

i18n-context:server

160

Index

161

CONTENTS

Preface

What is Covered in this Book

This book is a reference to all of the Artix specific WSDL extensions used in Artix contracts.

Who Should Read this Book

This book is intended for Artix users who are familiar with Artix concepts including:

- WSDL
- XMLSchema
- Artix interface design

In addition, this book assumes that the reader is familiar with the transports and middleware implementations with which they are working.

How to Use this Book

This book contains the following parts:

- [“Bindings”](#)—contains descriptions for all the WSDL extensions used to define the payload formats supported by Artix.
- [“Ports”](#)—contains descriptions for all the WSDL extensions used to define the transports supported by Artix.
- [“Other Extensions”](#)—contains descriptions for the WSDL extensions used by Artix to support features like routing.

The Artix Library

The Artix documentation library is organized in the following sections:

- [Getting Started](#)
- [Designing and Developing Artix Solutions](#)

- [Configuring and Deploying Artix Solutions](#)
- [Using Artix Services](#)
- [Integrating Artix Solutions](#)
- [Integrating with Enterprise Management Systems](#)
- [Reference Documentation](#)

Getting Started

The books in this section provide you with a background for working with Artix. They describe many of the concepts and technologies used by Artix. They include:

- [Release Notes](#) contains release-specific information about Artix.
- [Installation Guide](#) describes the prerequisites for installing Artix and the procedures for installing Artix on supported systems.
- [Getting Started with Artix](#) describes basic Artix and WSDL concepts.
- [Using Artix Designer](#) describes how to use Artix Designer to build Artix solutions.
- [Artix Technical Use Cases](#) provides a number of step-by-step examples of building common Artix solutions.

Designing and Developing Artix Solutions

The books in this section go into greater depth about using Artix to solve real-world problems. They describe how Artix uses WSDL to define services, and how to use the Artix APIs to build new services. They include:

- [Building Service-Oriented Architectures with Artix](#) provides an overview of service-oriented architectures and describes how they can be implemented using Artix.
- [Understanding Artix Contracts](#) describes the components of an Artix contract. Special attention is paid to the WSDL extensions used to define Artix-specific payload formats and transports.
- [Developing Artix Applications in C++](#) discusses the technical aspects of programming applications using the C++ API.
- [Developing Advanced Artix Plug-ins in C++](#) discusses the technical aspects of implementing advanced plug-ins (for example, interceptors) using the C++ API.
- [Developing Artix Applications in Java](#) discusses the technical aspects of programming applications using the Java API.

Configuring and Deploying Artix Solutions

This section includes:

- [Configuring and Deploying Artix Solutions](#) discusses how to configure and deploy Artix-enabled systems, and provides examples of typical use cases.

Using Artix Services

The books in this section describe how to use the services provided with Artix:

- [Artix Locator Guide](#) discusses how to use the Artix locator.
- [Artix Session Manager Guide](#) discusses how to use the Artix session manager.
- [Artix Transactions Guide, C++](#) explains how to enable Artix C++ applications to participate in transacted operations.
- [Artix Transactions Guide, Java](#) explains how to enable Artix Java applications to participate in transacted operations.
- [Artix Security Guide](#) explains how to use the security features of Artix.

Integrating Artix Solutions

The books in this section describe how to use Artix as a bridge between other middleware technologies and service-oriented middleware technologies.

- [Artix for CORBA](#) provides information on using Artix in a CORBA environment.
- [Artix for J2EE](#) provides information on using Artix to integrate with J2EE applications.

For details on integrating with Microsoft's .NET technology, see the documentation for Artix Connect.

Integrating with Enterprise Management Systems

The books in this section describe how to integrate Artix solutions with a range of enterprise management systems. They include:

- [IBM Tivoli Integration Guide](#) explains how to integrate Artix with IBM Tivoli.
- [BMC Patrol Integration Guide](#) explains how to integrate Artix with BMC Patrol.

- [CA WSDM Integration Guide](#) explains how to integrate Artix with CA's WSDM product.

Reference Documentation

These books provide detailed reference information about specific Artix APIs, WSDL extensions, configuration variables, command-line tools, and terminology. The reference documentation includes:

- [Artix Command Line Reference](#)
- [Artix Configuration Reference](#)
- [Artix WSDL Extension Reference](#)
- [Artix Java API Reference](#)
- [Artix C++ API Reference](#)
- [Artix .NET API Reference](#)
- [Artix Glossary](#)

Getting the Latest Version

The latest updates to the Artix documentation can be found at <http://www.iona.com/support/docs>.

Compare the version dates on the web page for your product version with the date printed on the copyright page of the PDF edition of the book you are reading.

Searching the Artix Library

You can search the online documentation by using the **Search** box at the top right of the documentation home page:

<http://www.iona.com/support/docs>

To search a particular library version, browse to the required index page, and use the **Search** box at the top right, for example:

<http://www.iona.com/support/docs/artix/4.0/index.xml>

You can also search within a particular book. To search within a HTML version of a book, use the **Search** box at the top left of the page. To search within a PDF version of a book, in Adobe Acrobat, select **Edit|Find**, and enter your search text.

Artix Online Help

Artix Designer and the Artix Management Console include comprehensive online help, providing:

- Step-by-step instructions on how to perform important tasks
- A full search feature
- Context-sensitive help for each screen

There are two ways that you can access the online help:

- Select **Help|Help Contents** from the menu bar. Sections on Artix Designer and the Artix Management Console appear in the contents panel of the Eclipse help browser.
- Press **F1** for context-sensitive help.

In addition, there are a number of cheat sheets that guide you through the most important functionality in Artix Designer. To access these, select **Help|Cheat Sheets**.

Artix Glossary

The [Artix Glossary](#) provides quick definitions and is a comprehensive reference for Artix terms. All terms are defined in the context of the development and deployment of Web services using Artix.

Additional Resources

The [IONA Knowledge Base](#) contains helpful articles written by IONA experts about Artix and other products.

The [IONA Update Center](#) contains the latest releases and patches for IONA products.

If you need help with this or any other IONA product, go to [IONA Online Support](#).

Comments, corrections, and suggestions on IONA documentation can be sent to docs-support@iona.com.

Document Conventions

This book uses the following typographical and keying conventions

Typographical conventions

This book uses the following typographical conventions:

<code>Fixed width</code>	<p>Fixed width (courier font) in normal text represents portions of code and literal names of items such as classes, functions, variables, and data structures. For example, text might refer to the <code>CORBA::Object</code> class.</p> <p>Constant width paragraphs represent code examples or information a system displays on the screen. For example:</p> <pre>#include <stdio.h></pre>
<code>Fixed width italic</code>	<p>Fixed width italic words or characters in code and commands represent variable values you must supply, such as arguments to commands or path names for your particular system. For example:</p> <pre>% cd /users/<i>YourUserName</i></pre>
<i>Italic</i>	<p>Italic words in normal text represent <i>emphasis</i> and <i>new terms</i>.</p>
Bold	<p>Bold words in normal text represent graphical user interface components such as menu commands and dialog boxes (for example, the User Preferences dialog.)</p>

Keying conventions

This book uses the following keying conventions:

No prompt	When a command's format is the same for multiple platforms, a prompt is not used.
%	A percent sign represents the UNIX command shell prompt for a command that does not require root privileges.
#	A number sign represents the UNIX command shell prompt for a command that requires root privileges.
>	The notation > represents the DOS or Windows command prompt.
...	Horizontal or vertical ellipses in format and syntax descriptions indicate that material has been eliminated to simplify a discussion.
[]	Brackets enclose optional items in format and syntax descriptions.
{ }	Braces enclose a list from which you must choose an item in format and syntax descriptions.
	In format and syntax descriptions, a vertical bar separates items in a list of choices enclosed in { } (braces). In graphical user interface descriptions, a vertical bar separates menu commands (for example, select File Open).

PREFACE

Part I

Bindings

In this part

This part contains the following chapters:

SOAP Binding	page 3
CORBA Binding and Type Map	page 13
Tuxedo FML Binding	page 39
Fixed Binding	page 43
Tagged Binding	page 55
TibrvMsg Binding	page 65
XML Binding	page 79

SOAP Binding

This chapter describes the attributes that are used to define a SOAP message binding in an Artix contract.

In this chapter

This chapter discusses the following topics:

SOAP Extensions	page 4
MIME Extensions	page 10

SOAP Extensions

soap:binding

Synopsis

```
<soap:binding style="..." transport="..." />
```

Description

The `soap:binding` element specifies that the payload format to use is a SOAP message. It is a child of the WSDL `binding` element.

Attributes

The following attributes are defined within the `soap:binding` element.

- [style](#)
- [transport](#)

style

The value of the `style` attribute within the `soap:binding` element acts as the default for the `style` attribute within each `soap:operation` element. It indicates whether request/response operations within this binding are RPC-based (that is, messages contain parameters and return values) or document-based (that is, messages contain one or more documents).

Valid values are `rpc` and `document`. The specified value determines how the SOAP `Body` element within a SOAP message is structured.

If `rpc` is specified, each message part within the SOAP `Body` element is a parameter or return value and will appear inside a wrapper element within the SOAP `Body` element. The name of the wrapper element must match the operation name. The namespace of the wrapper element is based on the value of the `soap:body namespace` attribute. The message parts within the wrapper element correspond to operation parameters and must appear in the same order as the parameters in the operation. Each part name must match the parameter name to which it corresponds.

For example, the SOAP `Body` element of a SOAP request message is as follows if the style is RPC-based:

```
<SOAP-ENV:Body>
  <m:GetStudentGrade xmlns:m="URL">
    <StudentCode>815637</StudentCode>
    <Subject>History</Subject>
  </m:GetStudentGrade>
</SOAP-ENV:Envelope>
```

If `document` is specified, message parts within the SOAP `Body` element appear directly under the SOAP `Body` element as body entries and do not appear inside a wrapper element that corresponds to an operation. For example, the SOAP `Body` element of a SOAP request message is as follows if the style is document-based:

```
<SOAP-ENV:Body>
  <StudentCode>815637</StudentCode>
  <Subject>History</Subject>
</SOAP-ENV:Envelope>
```

transport

The `transport` attribute defaults to the URL that corresponds to the HTTP binding in the W3C SOAP specification (<http://schemas.xmlsoap.org/soap/http>). If you want to use another transport (for example, SMTP), modify this value as appropriate for the transport you want to use.

soap:operation

Synopsis

```
<soap:operation style="..." soapAction="..." />
```

Description

The `soap:operation` element is a child of the WSDL `operation` element. A `soap:operation` element is used to encompass information for an operation as a whole, in terms of input criteria, output criteria, and fault information.

Attributes

The following attributes are defined within a `soap:operation` element:

- [style](#)
- [soapAction](#)

style

This indicates whether the relevant operation is RPC-based (that is, messages contain parameters and return values) or document-based (that is, messages contain one or more documents).

Valid values are `rpc` and `document`. The default value for `soap:operation style` is based on the value specified for the `soap:binding style` attribute. See [“style” on page 4](#) for more details of the `style` attribute.

soapAction

This specifies the value of the `SOAPAction` HTTP header field for the relevant operation. The value must take the form of the absolute URI that is to be used to specify the intent of the SOAP message.

Note: This attribute is mandatory only if you want to use SOAP over HTTP. Leave it blank if you want to use SOAP over any other transport.

soap:body**Synopsis**

```
<soap:body use="..." encodingStyle="..." namespace="..."
parts="..." />
```

Description

The `soap:body` element in a binding is a child of the `input`, `output`, and `fault` child elements of the WSDL `operation` element. A `<soap:body>` element is used to provide information on how message parts are to appear inside the body of a SOAP message. As explained in “[soap:operation](#)” on page 5, the structure of the SOAP `Body` element within a SOAP message is dependent on the setting of the `soap:operation style` attribute.

Attributes

The following attributes are defined within a `soap:body` element:

- [use](#)
- [encodingStyle](#)
- [namespace](#)
- [parts](#)

use

This mandatory attribute indicates how message parts are used to denote data types. Each message part relates to a particular data type that in turn might relate to an abstract type definition or a concrete schema definition.

An abstract type definition is a type that is defined in some remote encoding schema whose location is referenced in the WSDL contract via an `encodingStyle` attribute. In this case, types are serialized based on the set of rules defined by the specified encoding style.

A concrete schema definition relates to types that are defined in the WSDL contract itself, within a `schema` element within the `types` component of the contract.

The following are valid values for the `use` attribute:

- `encoded`

- `literal`

If `encoded` is specified, the `type` attribute that is specified for each message part (within the `message` component of the WSDL contract) is used to reference an abstract type defined in some remote encoding schema. In this case, a concrete SOAP message is produced by applying encoding rules to the abstract types. The encoding rules are based on the encoding style identified in the `soap:body encodingStyle` attribute. The encoding takes as input the `name` and `type` attribute for each message part (defined in the `message` component of the WSDL contract). If the encoding style allows variation in the message format for a given set of abstract types, the receiver of the message must ensure they can understand all the format variations.

If `literal` is specified, either the `element` or `type` attribute that is specified for each message part (within the `message` component of the WSDL contract) is used to reference a concrete schema definition (defined within the `types` component of the WSDL contract). If the `element` attribute is used to reference a concrete schema definition, the referenced element in the SOAP message appears directly under the SOAP `Body` element (if the operation style is document-based) or under a part accessor element that has the same name as the message part (if the operation style is RPC-based). If the `type` attribute is used to reference a concrete schema definition, the referenced type in the SOAP message becomes the schema type of the SOAP `Body` element (if the operation style is document-based) or of the part accessor element (if the operation style is document-based).

encodingStyle

This attribute is used when the `soap:body use` attribute is set to `encoded`. It specifies a list of URIs (each separated by a space) that represent encoding styles that are to be used within the SOAP message. The URIs should be listed in order, from the most restrictive encoding to the least restrictive.

This attribute can also be used when the `soap:body use` attribute is set to `literal`, to indicate that a particular encoding was used to derive the concrete format, but that only the specified variation is supported. In this case, the sender of the SOAP message must conform exactly to the specified schema.

namespace

If the `soap:operation style` attribute is set to `rpc`, each message part within the SOAP `Body` element of a SOAP message is a parameter or return value and will appear inside a wrapper element within the SOAP `Body`

element. The name of the wrapper element must match the operation name. The namespace of the wrapper element is based on the value of the `soap:body namespace` attribute.

parts

This attribute is a space separated list of parts from the parent `input`, `output`, or `fault` element. When `parts` is set, only the specified parts of the message are included in the SOAP `Body` element. The unlisted parts are not transmitted unless they are placed into the SOAP header.

soap:header

Synopsis

```
<soap:header message="..." part="..." use="..." encodingStyle="..."
namespace="..." />
```

Description

The `soap:header` element in a binding is an optional child of the `input`, `output`, and `fault` elements of the WSDL `operation` element. A `soap:header` element defines the information that is placed in a SOAP header element. You can define any number of `soap:header` elements for an operation. As explained in [“soap:operation” on page 5](#), the structure of the SOAP header within a SOAP message is dependent on the setting of the `soap:operation` element’s `style` attribute.

Attributes

The `soap:header` element has the following attributes.

<code>message</code>	Specifies the qualified name of the message from which the contents of the SOAP header is taken.
<code>part</code>	Specifies the name of the message part that is placed into the SOAP header.
<code>use</code>	Used in the same way as the <code>use</code> attribute within the <code>soap:body</code> element. See “use” on page 6 for more details.
<code>encodingStyle</code>	Used in the same way as the <code>encodingStyle</code> attribute within the <code>soap:body</code> element. See “encodingStyle” on page 7 for more details.

`namespace` If the `soap:operation style` attribute is set to `rpc`, each message part within the SOAP header of a SOAP message is a parameter or return value and will appear inside a wrapper element within the SOAP header. The name of the wrapper element must match the operation name. The namespace of the wrapper element is based on the value of the `soap:header namespace` attribute.

soap:fault

Synopsis

```
<soap:fault name="..." use="..." encodingStyle="..." />
```

Description

The `soap:fault` element is a child of the WSDL `fault` element within an operation component. Only one `soap:fault` element is defined for a particular operation. The operation must be a request-response or solicit-response type of operation, with both `input` and `output` elements. The `soap:fault` element is used to transmit error and status information within a SOAP response message.

Note: A fault message must consist of only a single message part. Also, it is assumed that the `soap:operation` element's `style` attribute is set to `document`, because faults do not contain parameters.

Attributes

The `soap:fault` element has the following attributes:

<code>name</code>	Specifies the name of the fault. This relates back to the <code>name</code> attribute for the <code>fault</code> element specified for the corresponding operation within the <code>portType</code> component of the WSDL contract.
<code>use</code>	This attribute is used in the same way as the <code>use</code> attribute within the <code>soap:body</code> element. See “use” on page 6 for more details.
<code>encodingStyle</code>	This attribute is used in the same way as the <code>encodingStyle</code> attribute within the <code>soap:body</code> element. See “encodingStyle” on page 7 for more details.

MIME Extensions

Namespace

The WSDL extensions used to define the MIME multipart/related messages are defined in the namespace `http://schemas.xmlsoap.org/wsdl/mime/`.

In the discussion that follows, it is assumed that this namespace is prefixed with `mime`. The entry in the WSDL `definition` element to set this up is shown in [Example 1](#).

Example 1: MIME Namespace Specification in a Contract

```
xmlns:mime="http://schemas.xmlsoap.org/wsdl/mime/"
```

mime:multipartRelated

Synopsis

```
<mime:multipartRelated>
  <mime:part ...>
    ...
  </mime:part>
  ...
</mime:multipartRelated>
```

Description

The `mime:multipartRelated` element is the child of an `input` element or an `output` element that is part of a SOAP binding. It tells Artix that the message body is going to be a multipart message that potentially contains binary data. `mime:multipartRelated` elements in Artix contain one or more [mime:part](#) elements that describe the individual parts of the message.

mime:part

Synopsis

```
<mime:part name="...">
  ...
</mime:part>
```

Description

The `mime:part` element is the child of a [mime:multipartRelated](#) element. It is used to define the parts of a multi-part message. The first `mime:part` element must contain the [soap:body](#) element that would normally appear in a default SOAP binding. The remaining `mime:part` elements define the attachments that are being sent in the message using a [mime:content](#) element.

Attributes

The `mime:part` element has a single attribute called `name`. `name` is a unique string that is used to identify the part being described.

mime:content**Synopsis**

```
<mime:content part="..." type="..." />
```

Description

The `mime:content` element is the child of a [mime:part](#) element. It defines the binary content being passed as an attachment to a SOAP message.

Attributes

The `mime:content` element has the following attributes:

<code>part</code>	Specifies the name of the WSDL <code>part</code> element, from the parent message definition, that is used as the content of this part of the MIME multipart message being placed on the wire.
<code>type</code>	<p>Specifies the MIME type of the data in this message part. MIME types are defined as a type and a subtype using the syntax <i>type/subtype</i>.</p> <p>There are a number of predefined MIME types such as <code>image/jpeg</code> and <code>text/plain</code>. The MIME types are maintained by IANA and described in the following:</p> <ul style="list-style-type: none"> • <i>Multipurpose Internet Mail Extensions (MIME) Part One: Format of Internet Message Bodies</i> (ftp://ftp.isi.edu/in-notes/rfc2045.txt) • <i>Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types</i> (ftp://ftp.isi.edu/in-notes/rfc2046.txt).

CORBA Binding and Type Map

Artix CORBA support uses a combination of a WSDL binding element and a `corba:typeMapping` element to unambiguously define CORBA Messages.

In this chapter

This chapter discusses the following topics:

CORBA Binding Extension Elements	page 14
CORBA Type Map Extension Elements	page 19

CORBA Binding Extension Elements

Namespace

The WSDL extensions used for the CORBA binding and the CORBA data mappings are defined in the namespace

`http://schemas.ionas.com/bindings/corba`. The Artix designer adds the following namespace declaration to any contract that uses the CORBA binding:

```
xmlns:corba="http://schemas.ionas.com/bindings/corba"
```

Primitive Type Mapping

Most primitive IDL types are directly mapped to primitive XML Schema types. [Table 1](#) lists the mappings for the supported IDL primitive types.

Table 1: *Primitive Type Mapping for CORBA Plug-in*

IDL Type	XML Schema Type	CORBA Binding Type	Artix C++ Type	Artix Java Type
Any	xsd:anyType	corba:any	IT_Bus::AnyHolder	com.ionas.webservices.reflect.types.AnyType
boolean	xsd:boolean	corba:boolean	IT_Bus::Boolean	boolean
char	xsd:byte	corba:char	IT_Bus::Char	byte
wchar	xsd:string	corba:wchar		java.lang.String
double	xsd:double	corba:double	IT_Bus::Double	double
float	xsd:float	corba:float	IT_Bus::Float	float
octet	xsd:unsignedByte	corba:octet	IT_Bus::Octet	short
long	xsd:int	corba:long	IT_Bus::Long	int
long long	xsd:long	corba:longlong	IT_Bus::LongLong	long

Table 1: *Primitive Type Mapping for CORBA Plug-in*

IDL Type	XML Schema Type	CORBA Binding Type	Artix C++ Type	Artix Java Type
short	xsd:short	corba:short	IT_Bus::Short	short
string	xsd:string	corba:string	IT_Bus::String	java.lang.String
wstring	xsd:string	corba:wstring		java.lang.String
unsigned short	xsd:unsignedShort	corba:ushort	IT_Bus::UShort	int
unsigned long	xsd:unsignedInt	corba:ulong	IT_Bus::ULong	long
unsigned long long	xsd:unsignedLong	corba:ulonglong	IT_Bus::ULongLong	java.math.BigInteger
TimeBase::UtcT	xsd:dateTime ^a	corba:dateTime	IT_Bus::DateTime	java.util.Calendar

a. The mapping between `xsd:dateTime` and `TimeBase::UtcT` is only partial. For the restrictions see [“Unsupported time/date values” on page 15](#)

Unsupported types

The following CORBA types are not supported:

- long double
- Value types
- Boxed values
- Local interfaces
- Abstract interfaces
- Forward-declared interfaces

Unsupported time/date values

The following `xsd:dateTime` values cannot be mapped to `TimeBase::UtcT`:

- Values with a local time zone. Local time is treated as a 0 UTC time zone offset.
- Values prior to 15 October 1582.
- Values greater than approximately 30,000 A.D.

The following `TimeBase::UtcT` values cannot be mapped to `xsd:dateTime`:

- Values with a non-zero `inaccco` or `inacchi`.
- Values with a time zone offset that is not divisible by 30 minutes.
- Values with time zone offsets greater than 14:30 or less than -14:30.
- Values with greater than millisecond accuracy.
- Values with years greater than 9999.

corba:binding

Synopsis

```
<corba:binding repositoryID="..." bases="..." />
```

Description

The `corba:binding` element indicates that the binding is a CORBA binding.

Attributes

This element has two attributes:

<code>repositoryID</code>	A required attribute whose value is the full type ID of the CORBA interface. The type ID is embedded in an object's IOR and must conform to the format <code>IDL:module/interface:1.0.</code>
<code>bases</code>	An optional attribute whose value is the type ID of the interface from which the interface being bound inherits.

Examples

For example, the following IDL:

```
//IDL
interface clash{};
interface bad : clash{};
```

would produce the following `corba:binding`:

```
<corba:binding repositoryID="IDL:bad:1.0"
    bases="IDL:clash:1.0"/>
```

corba:operation

Synopsis

```
<corba:operation name="..." >
  <corba:param ... />
  ...
  <corba:return ... />
  <corba:raises ... />
</corba:operation>
```

Description

The `corba:operation` element is a child element of the WSDL `operation` element and describes the parts of the operation's messages. It has one or more of the following children:

- [corba:param](#)
- [corba:return](#)

- [corba:raises](#)

Attributes

The `corba:operation` attribute takes a single attribute, `name`, which duplicates the name given in `operation`.

corba:param**Synopsis**

```
<corba:param name="..." mode="..." idltype="..." />
```

Description

The `corba:param` element is a child of `corba:operation`. Each `part` element of the input and output messages specified in the logical operation, except for the part representing the return value of the operation, must have a corresponding `corba:param` element. The parameter order defined in the binding must match the order specified in the IDL definition of the operation.

Attributes

The `corba:param` element has the following required attributes:

<code>mode</code>	Specifies the direction of the parameter. The values directly correspond to the IDL directions: <code>in</code> , <code>inout</code> , <code>out</code> . Parameters set to <code>in</code> must be included in the input message of the logical operation. Parameters set to <code>out</code> must be included in the output message of the logical operation. Parameters set to <code>inout</code> must appear in both the input and output messages of the logical operation.
<code>idltype</code>	Specifies the IDL type of the parameter. The type names are prefaced with <code>corba:</code> for primitive IDL types, and <code>corbatm:</code> for complex data types, which are mapped out in the <code>corba:typeMapping</code> portion of the contract. See “CORBA Type Map Extension Elements” on page 19 .
<code>name</code>	Specifies the name of the parameter as given in the <code>name</code> attribute of the corresponding <code>part</code> element.

corba:return**Synopsis**

```
<corba:return name="..." idltype="..." />
```

Description

The `corba:return` element is a child of `corba:operation` and specifies the return type, if any, of the operation.

Attributes

The `corba:return` element has two attributes:

<code>name</code>	Specifies the name of the parameter as given in the logical portion of the contract.
<code>idltype</code>	Specifies the IDL type of the parameter. The type names are prefaced with <code>corba:</code> for primitive IDL types and <code>corbatm:</code> for complex data types which are mapped out in the <code>corba:typeMapping</code> portion of the contract.

corba:raises**Synopsis**

```
<corba:raises exception="..." />
```

Description

The `corba:raises` element is a child of `corba:operation` and describes any exceptions the operation can raise. The exceptions are defined as fault messages in the logical definition of the operation. Each fault message must have a corresponding `corba:raises` element.

Attributes

The `corba:raises` element has one required attribute, `exception`, which specifies the type of data returned in the exception.

CORBA Type Map Extension Elements

corba:typeMapping

Synopsis

```
<corba:typeMapping
targetNamespace="http://schemas.ionac.com/bindings/corba/typemap">
...
</corba:typeMapping>
```

Description

Because complex types (such as structures, arrays, and exceptions) require a more involved mapping to resolve type ambiguity, the full mapping for a complex type is described in a `corba:typeMapping` element at the bottom of an Artix contract. This element contains a type map describing the metadata required to fully describe a complex type as a CORBA data type. This metadata may include the members of a structure, the bounds of an array, or the legal values of an enumeration.

Attributes

The `corba:typeMapping` element requires a `targetNamespace` attribute that specifies the namespace for the elements defined by the type map. The default URI is `http://schemas.ionac.com/bindings/corba/typemap`.

Examples

[Table 2](#) shows the mappings from complex IDL types to Artix CORBA types.

Table 2: *Complex IDL Type Mappings*

IDL Type	CORBA Binding Type
struct	<code>corba:struct</code>
enum	<code>corba:enum</code>
fixed	<code>corba:fixed</code>
union	<code>corba:union</code>
typedef	<code>corba:alias</code>
array	<code>corba:array</code>
sequence	<code>corba:sequence</code>
exception	<code>corba:exception</code>

corba:struct

Synopsis

```
<corba:struct name="..." type="..." repositoryID="..." />
  <corba:member ... />
  ...
</corba:struct>
```

The `corba:struct` element is used to represent XMLSchema types that are defined using `complexType` elements. The elements of the structure are described by a series of `corba:member` elements.

Attributes

A `corba:struct` element requires three attributes:

<code>name</code>	A unique identifier used to reference the CORBA type in the binding.
<code>type</code>	The logical type the structure is mapping.
<code>repositoryID</code>	The fully specified repository ID for the CORBA type.

corba:member

Synopsis

```
<corba:member name="..." idlType="..." />
```

Description

The `corba:member` element is used to define the parts of the structure represented by the parent element. The elements must be declared in the same order used in the IDL representation of the CORBA type.

Attributes

A `corba:member` requires two attributes:

<code>name</code>	The name of the element
<code>idltype</code>	The IDL type of the element. This type can be either a primitive type or another complex type that is defined in the type map.

Examples

For example, you may have a structure, `personalInfo`, similar to the one in [Example 2](#).

Example 2: *personalInfo*

```
enum hairColorType {red, brunette, blonde};

struct personalInfo
{
    string name;
    int age;
    hairColorType hairColor;
}
```

It can be represented in the CORBA type map as shown in [Example 3](#).

Example 3: *CORBA Type Map for personalInfo*

```
<corba:typeMapping targetNamespace="http://schemas.ionas.com/bindings/corba/typemap">
...
<corba:struct name="personalInfo" type="xsd:personalInfo" repositoryID="IDL:personalInfo:1.0">
  <corba:member name="name" idltype="corba:string"/>
  <corba:member name="age" idltype="corba:long"/>
  <corba:member name="hairColor" idltype="corbatm:hairColorType"/>
</corba:struct>
</corba:typeMapping>
```

The `idltype corbatm:hairColorType` refers to a complex type that is defined earlier in the CORBA type map.

corba:enum**Synopsis**

```
<corba:enum name="..." type="..." repositoryID="...">
  <corba:enumerator ... />
  ...
</corba:enum>
```

The `corba:enum` element is used to represent enumerations. The values for the enumeration are described by a series of `corba:enumerator` elements.

Attributes

A `corba:enum` element requires three attributes:

name	A unique identifier used to reference the CORBA type in the binding.
------	--

type	The logical type the structure is mapping.
repositoryID	The fully specified repository ID for the CORBA type.

corba:enumerator

Synopsis

```
<corba:enumerator value="..." />
```

Description

The `corba:enumerator` element represents the values of an enumeration. The values must be listed in the same order used in the IDL that defines the CORBA enumeration.

Attributes

A `corba:enumerator` element takes one attribute, `value`.

Examples

For example, the enumeration defined in [Example 2 on page 21](#), `hairColorType`, can be represented in the CORBA type map as shown in [Example 4](#):

Example 4: CORBA Type Map for `hairColorType`

```
<corba:typeMapping targetNamespace="http://schemas.iona.com/bindings/corba/typemap">
...
  <corba:enum name="hairColorType" type="xsd:hairColorType"
    repositoryID="IDL:hairColorType:1.0">
    <corba:enumerator value="red"/>
    <corba:enumerator value="brunette"/>
    <corba:enumerator value="blonde"/>
  </corba:enum>
</corba:typeMapping>
```

corba:fixed

Synopsis

```
<corba:fixed name="..." repositoryID="..." type="..." digits="..."
scale="..." />
```

Description

Fixed point data types are a special case in the Artix contract mapping. A CORBA fixed type is represented in the logical portion of the contract as the XML Schema primitive type `xsd:decimal`. However, because a CORBA fixed type requires additional information to be fully mapped to a physical CORBA data type, it must also be described in the CORBA type map section of an Artix contract using a `corba:fixed` element.

Attributes

A `corba:fixed` element requires five attributes:

<code>name</code>	A unique identifier used to reference the CORBA type in the binding.
<code>repositoryID</code>	The fully specified repository ID for the CORBA type.
<code>type</code>	The logical type the structure is mapping (for CORBA fixed types, this is always <code>xsd:decimal</code>).
<code>digits</code>	The upper limit for the total number of digits allowed. This corresponds to the first number in the fixed type definition.
<code>scale</code>	The number of digits allowed after the decimal point. This corresponds to the second number in the fixed type definition.

Examples

For example, the fixed type defined in [Example 5](#), `myFixed`, would be

Example 5: *myFixed Fixed Type*

```
\\IDL
typedef fixed<4,2> myFixed;
```

described by a type entry in the logical type description of the contract, as shown in [Example 6](#).

Example 6: *Logical description from myFixed*

```
<xsd:element name="myFixed" type="xsd:decimal"/>
```

In the CORBA type map portion of the contract, it would be described by an entry similar to [Example 7](#). Notice that the description in the CORBA type map includes the information needed to fully represent the characteristics of this particular fixed data type.

Example 7: *CORBA Type Map for myFixed*

```
<corba:typeMapping targetNamespace="http://schemas.ionas.com/bindings/corba/typemap">
...
  <corba:fixed name="myFixed" repositoryID="IDL:myFixed:1.0" type="xsd:decimal" digits="4"
    scale="2"/>
</corba:typeMapping>
```

corba:union

Synopsis

```
<corba:union name="..." type="..." discriminator="..."
    repositoryID="...">
  <corba:unionbranch ... />
  ...
</corba:union>
```

Description

The `corba:union` element is used to resolve the relationship between a union's discriminator and its members. A `corba:union` element is required for every CORBA union defined in an IDL contract. The members of the union are described using a series of nested [corba:unionbranch](#) elements.

Attributes

A `corba:union` element has four mandatory attributes:

<code>name</code>	A unique identifier used to reference the CORBA type in the binding.
<code>type</code>	The logical type the structure is mapping.
<code>discriminator</code>	The IDL type used as the discriminator for the union.
<code>repositoryID</code>	The fully specified repository ID for the CORBA type.

corba:unionbranch

Synopsis

```
<corba:unionbranch name="..." idltype="..." default="...">
  <corba:case ... />
  ...
</corba:unionbranch>
```

Description

The `corba:unionbranch` element defines the members of a union. Each `corba:unionbranch` except for one describing the union's default member will have at least one [corba:case](#) element as a child.

Attributes

A `corba:unionbranch` element has two required attributes and one optional attribute.

<code>name</code>	A unique identifier used to reference the union member.
<code>idltype</code>	The IDL type of the union member. This type can be either a primitive type or another complex type that is defined in the type map.

`default` The optional attribute specifying if this member is the default case for the union. To specify that the value is the default set this attribute to `true`.

corba:case

Synopsis

```
<corba:case label="..." />
```

Description

The `corba:case` element defines the explicit relationship between the discriminator's value and the associated union member.

Attributes

The `corba:case` element's only attribute, `label`, specifies the value used to select the union member described by the [corba:unionbranch](#).

Examples

For example consider the union, `myUnion`, shown in [Example 8](#):

Example 8: *myUnion IDL*

```
//IDL
union myUnion switch (short)
{
  case 0:
    string case0;
  case 1:
  case 2:
    float case12;
  default:
    long caseDef;
};
```

For example `myUnion`, [Example 8](#), would be described with a CORBA type map entry similar to that shown in [Example 9](#).

Example 9: *myUnion CORBA type map*

```
<corba:typeMapping targetNamespace="http://schemas.ionac.com/bindings/corba/typemap">
...
  <corba:union name="myUnion" type="xsd:myUnion" discriminator="corba:short"
    repositoryID="IDL:myUnion:1.0">
    <corba:unionbranch name="case0" idltype="corba:string">
      <corba:case label="0"/>
    </corba:unionbranch>
```

Example 9: *myUnion CORBA type map*

```

<corba:unionbranch name="case12" idltype="corba:float">
  <corba:case label="1"/>
  <corba:case label="2"/>
</corba:unionbranch>
<corba:unionbranch name="caseDef" idltype="corba:long" default="true"/>
</corba:union>
</corba:typeMapping>

```

corba:alias**Synopsis**

```
<corba:alias name="..." type="..." repositoryID="..." />
```

Description

The `corba:alias` element is used to represent a `typedef` statement in an IDL contract.

Attributes

The `corba:alias` element has three attributes:

<code>name</code>	The value of the <code>name</code> attribute from the XMLSchema <code>simpleType</code> element representing the renamed type.
<code>type</code>	The XMLSchema type for the base type.
<code>repositoryID</code>	The fully specified repository ID for the CORBA type.

Examples

For example, the definition of `myLong` in [Example 10](#), can be described as

Example 10: *myLong IDL*

```
//IDL
typedef long myLong;
```

shown in [Example 11](#):

Example 11: *myLong WSDL*

```
<?xml version="1.0" encoding="UTF-8"?>
<definitions name="typedef.idl" ...>
```

Example 11: *myLong WSDL*

```

<types>
...
  <xsd:simpleType name="myLong">
    <xsd:restriction base="xsd:int"/>
  </xsd:simpleType>
...
</types>
...
<corba:typeMapping targetNamespace="http://schemas.ionas.com/bindings/corba/typemap">
  <corba:alias name="myLong" type="xsd:int" repositoryID="IDL:myLong:1.0"
    basetype="corba:long"/>
</corba:typeMapping>
</definitions>

```

corba:array**Synopsis**

```

<corba:array name="..." repositoryID="..." type="..."
  elementype="..." bound="..." />

```

Description

In the CORBA type map, arrays are described using a `corba:array` element.

Attributes

A `corba:array` has the following required attributes:

<code>name</code>	A unique identifier used to reference the CORBA type in the binding.
<code>repositoryID</code>	The fully specified repository ID for the CORBA type.
<code>type</code>	The logical type the structure is mapping.
<code>elementype</code>	The IDL type of the array's element. This type can be either a primitive type or another complex type that is defined within the type map.
<code>bound</code>	The size of the array.

Examples

For example, consider an array, `myArray`, as defined in [Example 12](#).

Example 12: *myArray IDL*

```

//IDL
typedef long myArray[10];

```

The array `myArray` will have a CORBA type map description similar to the one shown in [Example 13](#).

Example 13: *myArray CORBA type map*

```
<corba:typeMapping targetNamespace="http://schemas.ionac.com/bindings/corba/typemap">
  <corba:array name="myArray" repositoryID="IDL:myArray:1.0" type="xsd:long"
    elementType="corba:long" bound="10"/>
</corba:typeMapping>
```

corba:sequence

Synopsis

```
<corba:sequence name="..." repositoryID="..." elementType="..."
bound="..." />
```

Description

The `corba:sequence` element represents an IDL `sequence`.

Attributes

A `corba:sequence` has five required attributes.

<code>name</code>	A unique identifier used to reference the CORBA type in the binding.
<code>repositoryID</code>	The fully specified repository ID for the CORBA type.
<code>type</code>	The logical type the structure is mapping.
<code>elementType</code>	The IDL type of the sequence's elements. This type can be either a primitive type or another complex type that is defined within the type map.
<code>bound</code>	The size of the sequence.

Examples

For example, consider the two sequences defined in [Example 14](#), `longSeq` and `charSeq`.

Example 14: *IDL Sequences*

```
\\ IDL
typedef sequence<long> longSeq;
typedef sequence<char, 10> charSeq;
```

The sequences described in [Example 14](#) has a CORBA type map description similar to that shown in [Example 15](#).

Example 15: *CORBA type map for Sequences*

```
<corba:typeMapping targetNamespace="http://schemas.iona.com/bindings/corba/typemap">
  <corba:sequence name="longSeq" repositoryID="IDL:longSeq:1.0" type="xsd1:longSeq"
    elemtype="corba:long" bound="0"/>
  <corba:sequence name="charSeq" repositoryID="IDL:charSeq:1.0" type="xsd1:charSeq"
    elemtype="corba:char" bound="10"/>
</corba:typeMapping>
```

corba:exception

Synopsis

```
<corba:exception name="..." type="..." repositoryID="...">
  <corba:member ... />
  ...
</corba:exception>
```

Description

The `corba:exception` element is a child of a `corba:typeMapping` element. It describes an exception in the CORBA type map. The pieces of data returned with the exception are described by a series of `corba:member` elements. The elements must be declared in the same order as in the IDL representation of the exception.

Attributes

A `corba:exception` element has the following required attributes:

<code>name</code>	A unique identifier used to reference the CORBA type in the binding.
<code>type</code>	The logical type the structure is mapping.
<code>repositoryID</code>	The fully specified repository ID for the CORBA type.

Examples

For example, consider the exception `idNotFound` defined in [Example 16](#).

Example 16: *idNotFound Exception*

```
\\IDL
exception idNotFound
{
  short id;
};
```

In the CORBA type map portion of the contract, `idNotFound` is described by an entry similar to that shown in [Example 17](#):

Example 17: *CORBA Type Map for `idNotFound`*

```
<corba:typeMapping targetNamespace="http://schemas.ionas.com/bindings/corba/typemap">
...
  <corba:exception name="idNotFound" type="xsd1:idNotFound" repositoryID="IDL:idNotFound:1.0">
    <corba:member name="id" idltype="corba:short"/>
  </corba:exception>
</corba:typeMapping>
```

corba:anonsequence

Synopsis

```
<corba:anonsequence name="..." bound="..." elemtype="..."
type="..." />
```

Description

The `corba:anonsequence` element is used when representing recursive types. Because XMLSchema recursion requires the use of two defined types and IDL recursion does not, the CORBA type map uses the `corba:anonsequence` element as a means of bridging the gap. When Artix generates IDL from a contract, it will not generate new IDL types for XMLSchema types that are used in a `corba:anonsequence` element.

Attributes

The `corba:anonsequence` element has four required attributes:

<code>name</code>	A unique identifier used to reference the CORBA type in the binding.
<code>bound</code>	The size of the sequence.
<code>elemtype</code>	The name of the CORBA type map element that defines the contents of the sequence.
<code>type</code>	The logical type the element represents.

Examples

[Example 18](#) shows a recursive XMLSchema type, `allAboutMe`, defined using a named type.

Example 18: *Recursive XML Schema Type*

```
<complexType name="allAboutMe">
  <sequence>
    <element name="shoeSize" type="xsd:int"/>
    <element name="mated" type="xsd:boolean"/>
    <element name="conversation" type="tns:moreMe"/>
  </sequence>
</complexType>
<complexType name="moreMe">
  <sequence>
    <element name="item" type="tns:allAboutMe"
      maxOccurs="unbounded"/>
  </sequence>
</complexType>
```

[Example 19](#) shows the how Artix maps the recursive type into the CORBA type map of an Artix contract.

Example 19: *Recursive CORBA Typemap*

```
<corba:anonsequence name="moreMe" bound="0"
  elemtype="ns1:allAboutMe" type="xsd1:moreMe"/>
<corba:struct name="allAboutMe"
  repositoryID="IDL:allAboutMe:1.0"
  type="xsd1:allAboutMe">
  <corba:member name="shoeSize" idltype="corba:long"/>
  <corba:member name="mated" idltype="corba:boolean"/>
  <corba:member name="conversation" idltype="ns1:moreMe"/>
</corba:struct>
```

While the XML in the CORBA typemap does not explicitly retain the recursive nature of recursive XMLSchema types, the IDL generated from the typemap restores the recursion in the IDL type. The IDL generated from the type map in [Example 19](#) defines `allAboutMe` using recursion. [Example 20](#) shows the generated IDL.

Example 20: *IDL for a Recursive Data Type*

```

\\IDL
struct allAboutMe
{
    long shoeSize;
    boolean mated;
    sequence<allAboutMe> conversation;
};

```

corba:anonstring

Synopsis

```
<corba:anonstring name="..." bound="..." type="..." />
```

Description

The `corba:anonstring` element is used to represent instances of anonymous XMLSchema simple types that are derived from `xsd:string`. As with `corba:anonsequence` elements, `corba:anonstring` elements do not result in generated IDL types.

Attributes

`corba:anonstring` elements have three attributes.

<code>name</code>	A unique identifier used to reference the CORBA type in the binding.
<code>bound</code>	The maximum length of the string.
<code>type</code>	The XMLSchema type of the base type. Typically this is <code>xsd:string</code> .

Examples

The complex type, `madAttr`, described in [Example 21](#) contains a member, `style`, that is an instance of an anonymous type derived from `xsd:string`.

Example 21: *madAttr* XML Schema

```
<complexType name="madAttr">
  <sequence>
    <element name="style">
      <simpleType>
        <restriction base="xsd:string">
          <maxLength value="3"/>
        </restriction>
      </simpleType>
    </element>
    <element name="gender" type="xsd:byte"/>
  </sequence>
</complexType>
```

`madAttr` would generate the CORBA typemap shown in [Example 22](#). Notice that `style` is given an IDL type defined by a `corba:anonstring` element.

Example 22: *madAttr* CORBA typemap

```
<corba:typeMapping targetNamespace="http://schemas.iona.com/anonCat/corba/typemap/">
  <corba:struct name="madAttr" repositoryID="IDL:madAttr:1.0" type="xsd1:madAttr">
    <corba:member idltype="ns1:styleType" name="style"/>
    <corba:member idltype="corba:char" name="gender"/>
  </corba:struct>
  <corba:anonstring bound="3" name="styleType" type="xsd:string"/>
</corba:typeMapping>
```

corba:object**Synopsis**

```
<corba:object binding="..." name="..." repositoryID="..."
type="..." />
```

Description

The `corba:object` element is used to represent Artix references in the CORBA type map.

Attributes

`corba:object` elements have four attributes:

<code>binding</code>	Specifies the binding to which the object refers. If the annotation element is left off the reference declaration in the schema, this attribute will be blank.
----------------------	--

name	Specifies the name of the CORBA type. If the annotation element is left off the reference declaration in the schema, this attribute will be <code>Object</code> . If the annotation is used and the binding can be found, this attribute will be set to the name of the interface that the binding represents.
repositoryID	Specifies the repository ID of the generated IDL type. If the annotation element is left off the reference declaration in the schema, this attribute will be set to <code>IDL:omg.org/CORBA/Object/1.0</code> . If the annotation is used and the binding can be found, this attribute will be set to a properly formed repository ID based on the interface name.
type	Specifies the schema type from which the CORBA type is generated. This attribute is always set to <code>references:Reference</code> .

Examples

[Example 23](#) shows an Artix contract fragment that uses Artix references.

Example 23: Reference Sample

```
<?xml version="1.0" encoding="UTF-8"?>
<definitions name="bankService"
  targetNamespace="http://schemas.myBank.com/bankTypes"
  xmlns="http://schemas.xmlsoap.org/wsdl/"
  xmlns:tns="http://schemas.myBank.com/bankService"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:xsd1="http://schemas.myBank.com/bankTypes"
  xmlns:corba="http://schemas.iona.com/bindings/corba"
  xmlns:corbatm="http://schemas.iona.com/typemap/corba/bank.idl"
  xmlns:references="http://schemas.iona.com/references">
  <types>
    <schema
      targetNamespace="http://schemas.myBank.com/bankTypes"
      xmlns="http://www.w3.org/2001/XMLSchema"
      xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/"
      <xsd:import schemaLocation="./references.xsd"
        namespace="http://schemas.iona.com/references"/>
```

Example 23: *Reference Sample (Continued)*

```

...
    <xsd:element name="account" type="references:Reference">
      <xsd:annotation>
        <xsd:appinfo>
          corba:binding=AccountCORBABinding
        </xsd:appinfo>
      </xsd:annotation>
    </xsd:element>
  </schema>
</types>
...
<message name="find_accountResponse">
  <part name="return" element="xsd1:account"/>
</message>
<message name="create_accountResponse">
  <part name="return" element="xsd1:account"/>
</message>
<portType name="Account">
  <operation name="account_id">
    <input message="tns:account_id" name="account_id"/>
    <output message="tns:account_idResponse"
      name="account_idResponse"/>
  </operation>
  <operation name="balance">
    <input message="tns:balance" name="balance"/>
    <output message="tns:balanceResponse"
      name="balanceResponse"/>
  </operation>
  <operation name="withdraw">
    <input message="tns:withdraw" name="withdraw"/>
    <output message="tns:withdrawResponse"
      name="withdrawResponse"/>
    <fault message="tns:InsufficientFundsException"
      name="InsufficientFunds"/>
  </operation>
  <operation name="deposit">
    <input message="tns:deposit" name="deposit"/>
    <output message="tns:depositResponse"
      name="depositResponse"/>
  </operation>
</portType>

```

Example 23: *Reference Sample (Continued)*

```

<portType name="Bank">
  <operation name="find_account">
    <input message="tns:find_account" name="find_account"/>
    <output message="tns:find_accountResponse"
      name="find_accountResponse"/>
    <fault message="tns:AccountNotFound"
      name="AccountNotFound"/>
  </operation>
  <operation name="create_account">
    <input message="tns:create_account" name="create_account"/>
    <output message="tns:create_accountResponse"
      name="create_accountResponse"/>
    <fault message="tns:AccountAlreadyExistsException"
      name="AccountAlreadyExists"/>
  </operation>
</portType>
</definitions>

```

The element named `account` is a reference to the interface defined by the `Account` port type and the `find_account` operation of `Bank` returns an element of type `account`. The annotation element in the definition of `account` specifies the binding, `AccountCORBABinding`, of the interface to which the reference refers.

[Example 24](#) shows the generated CORBA typemap resulting from generating both the `Account` and the `Bank` interfaces into the same contract.

Example 24: *CORBA Typemap with References*

```

<corba:typeMapping
  targetNamespace="http://schemas.myBank.com/bankService/corba/typemap/">
  ...
  <corba:object binding="" name="Object"
    repositoryID="IDL:omg.org/CORBA/Object/1.0" type="references:Reference"/>
  <corba:object binding="AccountCORBABinding" name="Account"
    repositoryID="IDL:Account:1.0" type="references:Reference"/>
</corba:typeMapping>

```

There are two entries because `wsdltocorba` was run twice on the same file. The first CORBA object is generated from the first pass of `wsdltocorba` to generate the CORBA binding for `Account`. Because `wsdltocorba` could not find the binding specified in the annotation, it generated a generic `Object` reference. The second CORBA object, `Account`, is generated by the second

pass when the binding for `Bank` was generated. On that pass, `wsltdocorba` could inspect the binding for the `Account` interface and generate a type-specific object reference.

[Example 25](#) shows the IDL generated for the `Bank` interface.

Example 25: *IDL Generated From Artix References*

```
//IDL
...
interface Account
{
    string account_id();
    float balance();
    void withdraw(in float amount)
        raises(::InsufficientFundsException);
    void deposit(in float amount);
};
interface Bank
{
    ::Account find_account(in string account_id)
        raises(::AccountNotFoundException);
    ::Account create_account(in string account_id,
                            in float initial_balance)
        raises(::AccountAlreadyExistsException);
};
```


Tuxedo FML Binding

Artix supports the use of Tuxedo's FML buffers. It uses a set of Artix specific elements placed in the WSDL binding element.

Namespace

The WSDL extensions used for the FML binding are defined in the namespace `http://schemas.iona.com/transport/tuxedo`. Add the following namespace declaration to any contracts that use an FML binding:

```
xmlns:tuxedo="http://schemas.iona.com/transport/tuxedo"
```

FML/XMLSchema Support

An FML buffer can only contain the data types listed in [Table 3](#).

Table 3: *FML Type Support*

XML Schema Type	FML Type
xsd:short	short
xsd:unsignedShort	short

Table 3: *FML Type Support*

XML Schema Type	FML Type
xsd:int	long
xsd:unsignedInt	long
xsd:float	float
xsd:double	double
xsd:string	string
xsd:base64Binary	string
xsd:hexBinary	string

Due to FML limitations, support for complex types is limited to `xsd:sequence` and `xsd:any`.

tuxedo:binding

Synopsis

```
<tuxedo:binding />
```

Description

The `tuxedo:binding` element informs Artix that the payload being described is an FML buffer. It is a child of the WSDL `binding` element and has no children.

tuxedo:fieldTable

Synopsis

```
<tuxedo:fieldTable type="...">
  <tuxedo:field ... />
  ...
</tuxedo:fieldTable>
```

Description

The `tuxedo:fieldTable` element contains the mappings between the elements defined in the logical section of the contract and their associated FML `fieldid`.

Attributes

The `tuxedo:fieldTable` element has one required attribute, `type`, that specifies if the FML buffer is an FML16 buffer or an FML32 buffer. [Table 4](#) shows the values of the `type` attribute.

Table 4: *Values of tuxedo:fieldTable Element's type Attribute*

Value	Meaning
FML	The represented FML buffer is a FML16 buffer.
FML32	The represented FML buffer is an FML32 buffer.

tuxedo:field

Synopsis

```
<tuxedo:field name="..." id="..." />
```

Description

The `tuxedo:field` element defines the association between an element in the logical contract and its corresponding entry in the physical FML buffer. Each element in a message, either a message part or an element in a complex type, must have a corresponding `tuxedo:field` element in the FML binding.

Attributes

The `tuxedo:field` element takes two attributes:

<code>name</code>	The value of the <code>name</code> attribute from the logical message element to which this <code>tuxedo:field</code> element corresponds.
<code>id</code>	The <code>fieldId</code> value of the corresponding element in the generated C++ header defining the FML buffer.

tuxedo:operation

Synopsis

```
<tuxedo:operation />
```

Description

The `tuxedo:operation` element is a child of the WSDL binding's `operation` element. It informs Artix that the messages used by the operation are being passed as FML buffers.

Fixed Binding

The Artix fixed binding supports mapping between XMLSchema message definitions and messages formatted in fixed length records.

Namespace

The IONA extensions used to describe fixed record length messages are defined in the namespace `http://schemas.iona.com/bindings/fixed`. Artix tools use the prefix `fixed` to represent the fixed record length extensions. Add the following line to your contract:

```
xmlns:fixed="http://schemas.iona.com/bindings/fixed"
```

fixed:binding

Synopsis

```
<fixed:binding justification="..." encoding="..."
  padHexCode="..." />
```

Description

The `fixed:binding` element is a child of the WSDL `binding` element. It specifies that the binding defines a mapping between fixed record length data and the XMLSchema representation of the data.

Attributes

The `fixed:binding` element has three attributes:

`justification` Specifies the default justification of the data contained in the messages. Valid values are `left` and `right`. Default is `left`.

<code>encoding</code>	Specifies the codeset used to encode the text data. Valid values are any valid ISO locale or IANA codeset name. Default is <code>UTF-8</code> .
<code>padHexCode</code>	Specifies the hex value of the character used to pad the record.

The settings for the attributes on the `fixed:binding` element become the default settings for all the messages being mapped to the current binding.

fixed:operation

Synopsis

```
<fixed:operation discriminator="..." />
```

Description

The `fixed:operation` element is a child element of the WSDL `operation` element and specifies that the operation's messages are being mapped to fixed record length data.

Attributes

The `fixed:operation` element has one attribute, `discriminator`, that assigns a unique identifier to the operation. If your service only defines a single operation, you do not need to provide a discriminator. However, if your operation has more than one service, you must define a unique discriminator for each operation in the service. Not doing so will result in unpredictable behavior when the service is deployed.

fixed:body

Synopsis

```
<fixed:body justification="..." encoding="..." padHexCode="...">
  ...
</fixed:body>
```

Description

The `fixed:body` element is a child element of the `input`, `output`, and `fault` messages being mapped to fixed record length data. It specifies that the message body is mapped to fixed record length data on the wire and describes the exact mapping for the message's parts.

The order in which the message parts are listed in the `fixed:body` element represent the order in which they are placed on the wire. It does not need to correspond to the order in which they are specified in the WSDL `message` element defining the logical message.

The following child elements are used in defining how logical data is mapped to a concrete fixed format message:

- [fixed:field](#) maps message parts defined using a simple type.
- [fixed:sequence](#) maps message parts defined using a `sequence` complex type.

Note: Complex types defined using `all` are not supported by the fixed binding.

- [fixed:choice](#) maps message parts defined using a `choice` complex type.

Attributes

The `fixed:body` element has three attributes:

<code>justification</code>	Specifies how the data in the messages are justified. Valid values are <code>left</code> and <code>right</code> .
<code>encoding</code>	Specifies the codeset used to encode text data. Valid values are any valid ISO locale or IANA codeset name.
<code>padHexCode</code>	Specifies the hex value of the character used to pad the record.

fixed:field

Synopsis

```
<fixed:field name="..." "size="..." format="..." fixedValue="..."
            bindingOnly="...">
  <fixed:enumeration ... />
  ...
</fixed:field>
```

Description

The `fixed:field` element is used to map simple data types to a field in a fixed record length message. It is the child of a `fixed:body` element.

Attributes

The `fixed:field` element has the following attributes:

<code>name</code>	Specifies the name of the logical message part that this element represents. It is a required attribute.
-------------------	--

<code>size</code>	Specifies the maximum number of characters in a message part whose base type is <code>xsd:string</code> . Also used to specify the number of characters in the on-wire values used to represent the values of an enumerated type. For more information see “fixed:enumeration” on page 48 .
<code>format</code>	Specifies how non-string data is formatted when it is placed on the wire. For numerical data, formats are entered using <code>#</code> to represent numerical fields and <code>.</code> to represent decimal places. For example <code>##.##</code> would be used to represent <code>12.04</code> . Also can be used for string data that is a date. Date formats use the standard date format syntax. For example, <code>mm/dd/yy</code> would represent dates such as <code>02/23/04</code> and <code>11/02/98</code> .
<code>fixedValue</code>	Specifies the value to use for the represented logical message part. The value of <code>fixedValue</code> is always the value placed on the wire for the represented message part. It will override any values set in the application code.
<code>bindingOnly</code>	Specifies if the field appears in the logical definition of the message. The default value is <code>false</code> . When set to <code>true</code> , this attribute signals Artix that it needs to insert a field into the on-wire message that does not appear in the logical message. <code>bindingOnly</code> is used in conjunction with the <code>fixedValue</code> attribute. The <code>fixedValue</code> attribute is used to specify the data to be written into the binding-only field.

Examples

The following examples show different ways of representing data using a `fixed:field` element:

- [String data](#)
- [Numeric data](#)
- [Dates](#)
- [Binding only records](#)

String data

The logical message part, `raverID`, described in [Example 26](#) would be mapped to a `fixed:field` similar to [Example 27](#).

Example 26: Fixed String Message

```
<message name="fixedStringMessage">
  <part name="raverID" type="xsd:string"/>
</message>
```

In order to complete the mapping, you must know the length of the record field and supply it. In this case, the field, `raverID`, can contain no more than twenty characters.

Example 27: Fixed String Mapping

```
<fixed:field name="raverID" size="20"/>
```

Numeric data

If a field contains a 2-digit numeric value with one decimal place, it would be described in the logical part of the contract as an `xsd:float`, as shown in [Example 28](#).

Example 28: Fixed Record Numeric Message

```
<message name="fixedNumberMessage">
  <part name="rageLevel" type="xsd:float"/>
</message>
```

From the logical description of the message, Artix has no way of determining that the value of `rageLevel` is a 2-digit number with one decimal place because the fixed record length binding treats all data as characters. When mapping `rageLevel` in the fixed binding you would specify its `format` with `##.##`, as shown in [Example 29](#). This provides Artix with the metadata needed to properly handle the data.

Example 29: Mapping Numerical Data to a Fixed Binding

```
<fixed:flield name="rageLevel" format="##.##"/>
```

Dates

Dates are specified in a similar fashion. For example, the `format` of the date 12/02/72 is `MM/DD/YY`. When using the fixed binding it is recommended that dates are described in the logical part of the contract using `xsd:string`. For example, a message containing a date would be described in the logical part of the contract as shown in [Example 30](#).

Example 30: Fixed Date Message

```
<message name="fixedDateMessage">
  <part name="goDate" type="xsd:string"/>
</message>
```

If `goDate` is entered using the standard short date format for US English locales, `mm/dd/yyyy`, you would map it to a fixed record field as shown in [Example 31](#).

Example 31: Fixed Format Date Mapping

```
<fixed:field name="goDate" format="mm/dd/yyyy"/>
```

Binding only records

If you were sending reports that included a fixed expiration date that you did not want exposed to the application, you could create a binding only record called `expDate`. It would be mapped to the fixed field shown in [Example 32](#).

Example 32: fixedValue Mapping

```
<fixed:field name="goDate" bindingOnly="true"
  fixedValue="11/11/2112"/>
```

fixed:enumeration

Synopsis

```
<fixed:enumeration value="..." fixedValue="..." />
```

Description

The `fixed:enumeration` element is a child of a `fixed:body` element. It is used to represent the possible values of an enumerated type and define how those values are represented on the wire.

Attributes

The `fixed:enumeration` element has two required attributes:

<code>value</code>	Is the value of the corresponding enumeration value in the logical description of the message part.
<code>fixedValue</code>	Specifies the string value that will be used to represent the logical value on the wire. The length of the string used is determined by the value of the parent <code>fixed:field</code> element's <code>length</code> attribute.

Examples

If you had an enumerated type with the values `FruityTooty`, `Rainbow`, `BerryBomb`, and `OrangeTango` the logical description of the type would be similar to [Example 33](#).

Example 33: Ice Cream Enumeration

```
<xs:simpleType name="flavorType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="FruityTooty"/>
    <xs:enumeration value="Rainbow"/>
    <xs:enumeration value="BerryBomb"/>
    <xs:enumeration value="OrangeTango"/>
  </xs:restriction>
</xs:simpleType>
```

When you map the enumerated type, you need to know the concrete representation for each of the enumerated values. The concrete representations can be identical to the logical definitions or some other value. The enumerated type in [Example 33](#) could be mapped to the fixed field shown in [Example 34](#). Using this mapping Artix will write OT to the wire for this field if the enumerations value is set to `OrangeTango`.

Example 34: Fixed Ice Cream Mapping

```
<fixed:field name="flavor" size="2">
  <fixed:enumeration value="FruityTooty" fixedValue="FT"/>
  <fixed:enumeration value="Rainbow" fixedValue="RB"/>
  <fixed:enumeration value="BerryBomb" fixedValue="BB"/>
  <fixed:enumeration value="OrangeTango" fixedValue="OT"/>
</fixed:field>
```

fixed:choice

Synopsis

```
<fixed:choice name="..." discriminatorName="...">
```

```

    <fixed:case ... >
      ...
    </fixed:case>
    ...
  </fixed:choice>

```

Description

The `fixed:choice` element is a child of a `fixed:body` element. It maps choice complex types to a field in a fixed record length message. The actual values of the choice are defined using `fixed:case` child elements. A `fixed:choice` element must have a `fixed:case` child element for each possible value defined in the choice complex type it represents.

Attributes

The `fixed:choice` element has the following attributes:

<code>name</code>	Specifies the name of the logical message part the choice element is mapping. This attribute is required.
<code>discriminatorName</code>	Specifies the name of a binding-only field that is used as the discriminator for the union. The binding-only field must be defined as part of the parent <code>fixed:body</code> element and must be capable of representing the discriminator.

fixed:case**Synopsis**

```

<fixed:case name="..." fixedValue="...">
  ...
</fixed:case>

```

Description

The `fixed:case` element is a child of the `fixed:choice` element. It describes the complete mapping for an element of a choice complex type to a field in a fixed record length message.

To fully describe how the logical data that is represented by a `fixed:case` element is mapped into a field in a fixed record length message, you need to create a mapping for the logical element using children to the `fixed:case` element. The child elements used to map the part's type to the fixed message are the same as the possible child elements of a `fixed:body` element. `fixed:field` elements describe simple types. `fixed:choice` elements describe choice complex types. `fixed:sequence` elements describe sequence complex types.

Attributes

The `fixed:case` element has the following required attributes:

<code>name</code>	Specifies the value of the <code>name</code> attribute of the corresponding element in the choice complex type being mapped.
<code>fixedValue</code>	Specifies the discriminator value that selects this case. If the parent <code>fixed:choice</code> element has its <code>discriminatorName</code> attribute set, the value must conform to the format specified for that field.

Examples

[Example 35](#) shows an Artix contract fragment mapping a choice complex type to a fixed record length message.

Example 35: Mapping a Union to a Fixed Record Length Message

```
<?xml version="1.0" encoding="UTF-8"?>
<definitions name="fixedMappingsample"
  targetNamespace="http://www.iona.com/FixedService"
  xmlns="http://schemas.xmlsoap.org/wsdl/"
  xmlns:fixed="http://schemas.iona.com/bindings/fixed"
  xmlns:tns="http://www.iona.com/FixedService"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <types>
    <schema targetNamespace="http://www.iona.com/FixedService"
      xmlns="http://www.w3.org/2001/XMLSchema"
      xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
      <xsd:complexType name="unionStationType">
        <xsd:choice>
          <xsd:element name="train" type="xsd:string"/>
          <xsd:element name="bus" type="xsd:int"/>
          <xsd:element name="cab" type="xsd:int"/>
          <xsd:element name="subway" type="xsd:string"/>
        </xsd:choice>
      </xsd:complexType>
    ...
  </types>
  <message name="fixedSequence">
    <part name="stationPart" type="tns:unionStationType"/>
  </message>
  <portType name="fixedSequencePortType">
    ...
  </portType>
  <binding name="fixedSequenceBinding"
    type="tns:fixedSequencePortType">
    <fixed:binding/>
  ...
</definitions>
```

Example 35: *Mapping a Union to a Fixed Record Length Message*

```

<fixed:field name="disc" format="##" bindingOnly="true"/>
<fixed:choice name="stationPart"
  discriminatorName="disc">
  <fixed:case name="train" fixedValue="01">
    <fixed:field name="name" size="20"/>
  </fixed:case>
  <fixed:case name="bus" fixedValue="02">
    <fixed:field name="number" format="###"/>
  </fixed:case>
  <fixed:case name="cab" fixedValue="03">
    <fixed:field name="number" format="###"/>
  </fixed:case>
  <fixed:case name="subway" fixedValue="04">
    <fixed:field name="name" format="10"/>
  </fixed:case>
</fixed:choice>
...
</binding>
...
</definition>

```

fixed:sequence**Synopsis**

```

<fixed:sequence name="..." occurs="..." counterName="...">
  ...
</fixed:field>

```

Description

The `fixed:sequence` element can be a child to a `fixed:body` element, a `fixed:case` element, or another `fixed:sequence` element. It maps a sequence complex type to a field in a fixed record length message.

To fully describe how the complex type that is represented by a `fixed:sequence` element is mapped into a field in a fixed record length message, you need to create a mapping for each of the complex type's elements using children to the `fixed:sequence` element. The child elements used to map the part's type to the fixed message are the same as the possible child elements of a `fixed:body` element. `fixed:field` elements describe simple types. `fixed:choice` elements describe choice complex types. `fixed:sequence` elements describe sequence complex types.

Attributes

The `fixed:sequence` element has the following attributes:

<code>name</code>	Specifies the value of the <code>name</code> attribute from the corresponding logical complex type. This attribute is required.
<code>occurs</code>	Specifies the number of times this sequence occurs in the message buffer. This value corresponds the value of the <code>maxOccurs</code> attribute of the corresponding logical complex type.
<code>counterName</code>	Specifies the name of the binding-only field that is used to store the actual number of times this sequence occurs in the on-wire message. The corresponding <code>fixed:field</code> element must have enough digits to hold the any whole number up the value of the <code>occurs</code> attribute.

Examples

A structure containing a name, a date, and an ID number would contain three `fixed:field` elements to fully describe the mapping of the data to the fixed record message. [Example 36](#) shows an Artix contract fragment for such a mapping.

Example 36: Mapping a Sequence to a Fixed Record Length Message

```
<?xml version="1.0" encoding="UTF-8"?>
<definitions name="fixedMappingsample"
  targetNamespace="http://www.iona.com/FixedService"
  xmlns="http://schemas.xmlsoap.org/wsdl/"
  xmlns:fixed="http://schemas.iona.com/bindings/fixed"
  xmlns:tns="http://www.iona.com/FixedService"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <types>
    <schema targetNamespace="http://www.iona.com/FixedService"
      xmlns="http://www.w3.org/2001/XMLSchema"
      xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
      <xsd:complexType name="person">
        <xsd:sequence>
          <xsd:element name="name" type="xsd:string"/>
          <xsd:element name="date" type="xsd:string"/>
          <xsd:element name="ID" type="xsd:int"/>
        </xsd:sequence>
      </xsd:complexType>
      ...
    </types>
    <message name="fixedSequence">
      <part name="personPart" type="tns:person"/>
    </message>
```

Example 36: *Mapping a Sequence to a Fixed Record Length Message*

```
<portType name="fixedSequencePortType">
...
</portType>
<binding name="fixedSequenceBinding"
  type="tns:fixedSequencePortType">
  <fixed:binding/>
...
  <fixed:sequence name="personPart">
    <fixed:field name="name" size="20"/>
    <fixed:field name="date" format="MM/DD/YY"/>
    <fixed:field name="ID" format="#####"/>
  </fixed:sequence>
...
</binding>
...
</definition>
```

Tagged Binding

The Artix tagged binding maps between XMLSchema message definitions and self-describing, variable record length messages.

Namespace

The IONA extensions used to describe tagged data bindings are defined in the namespace `http://schemas.iona.com/bindings/tagged`. Artix tools use the prefix `tagged` to represent the tagged data extensions. Add the following line to the `definitions` element of your contract:

```
xmlns:tagged="http://schemas.iona.com/bindings/tagged"
```

tagged:binding

Synopsis

```
<tagged:binding selfDescribing="..." fieldSeparator="..."
                fieldNameValueSeparator="..." scopeType="..."
                flattened="..." messageStart="..." messageEnd="..."
                unscopedArrayElement="..." ignoreUnknownElement="..."
                ignoreCase="..." />
```

Description

The `tagged:binding` element specifies that the binding maps logical messages to tagged data messages.

Attributes

The `tagged:binding` element has the following ten attributes:

<code>selfDescribing</code>	Specifies if the message data on the wire includes the field names. Valid values are <code>true</code> or <code>false</code> . If this attribute is set to <code>false</code> , the setting for <code>fieldNameValueSeparator</code> is ignored. This attribute is required.
<code>fieldSeparator</code>	Specifies the delimiter the message uses to separate fields. Supported values are <code>newline(\n)</code> , <code>comma(,)</code> , <code>semicolon(,)</code> , and <code>pipe()</code> . This attribute is required.
<code>fieldNameValueSeparator</code>	Specifies the delimiter used to separate field names from field values in self-describing messages. Supported values are: <code>equals(=)</code> , <code>tab(\t)</code> , and <code>colon(:)</code> .
<code>scopeType</code>	Specifies the scope identifier for complex messages. Supported values are <code>tab(\t)</code> , <code>curlybrace({data})</code> , and <code>none</code> . The default is <code>tab</code> .
<code>flattened</code>	Specifies if data structures are flattened when they are put on the wire. If <code>selfDescribing</code> is <code>false</code> , then this attribute is automatically set to <code>true</code> .
<code>messageStart</code>	Specifies a special token at the start of a message. It is used when messages that require a special character at the start of a the data sequence. Currently the only supported value is <code>star(*)</code> .
<code>messageEnd</code>	Specifies a special token at the end of a message. Supported values are <code>newline(\n)</code> and <code>percent(%)</code> .
<code>unscopedArrayElement</code>	Specifies if array elements need to be scoped as children of the array. If set to <code>true</code> arrays take the form <code>echoArray{myArray=2;item=abc;item=def}</code> . If set to <code>false</code> arrays take the form <code>echoArray{myArray=2;{0=abc;1=def;}}</code> . Default is <code>false</code> .
<code>ignoreUnknownElements</code>	Specifies if Artix ignores undefined element in the message payload. Default is <code>false</code> .

<code>ignoreCase</code>	Specifies if Artix ignores the case with element names in the message payload. Default is <code>false</code> .
-------------------------	--

The settings for the attributes on these elements become the default settings for all the messages being mapped to the current binding.

tagged:operation

Synopsis

```
<tagged:operation discriminator="..." discriminatorStyle="..." />
```

Description

The `tagged:operation` element is a child element of the WSDL `operation` element. It specifies that the operation's messages are being mapped to a tagged data message.

Attributes

The `tagged:operation` element takes two optional attributes:

<code>discriminator</code>	Specifies a discriminator for identifying the operation as it is sent down the wire by the Artix runtime.
<code>discriminatorStyle</code>	Specifies how the discriminator will identify data as it is sent down the wire by the Artix runtime. Supported values are <code>msgname</code> , <code>partlist</code> , and <code>fieldname</code> .

tagged:body

Synopsis

```
<tagged:body>
  ...
</tagged:body>
```

Description

The `tagged:body` element is a child element of the `input`, `output`, and `fault` messages being mapped to a tagged data format. It specifies that the message body is mapped to tagged data on the wire and describes the exact mapping for the message's parts.

The `tagged:body` element will have one or more of the following child elements:

- [tagged:field](#)
- [tagged:sequence](#)

- [tagged:choice](#)

The children describe the detailed mapping of the XMLSchema message to the tagged data to be sent on the wire.

tagged:field

Synopsis

```
<tagged:field name="..." alias="...">
  <tagged:enumeration ... />
  ...
</tagged:field>
```

The `tagged:field` element is a child of a [tagged:body](#) element. It maps simple types and enumerations to a field in a tagged data message. When describing enumerated types a `tagged:field` element will have one or more [tagged:enumeration](#) child elements.

Attributes

The `tagged:field` element has two attributes:

<code>name</code>	A required attribute that must correspond to the name of the logical message <code>part</code> that is being mapped to the tagged data field.
<code>alias</code>	An optional attribute specifying an alias for the field that can be used to identify it on the wire.

tagged:enumeration

Synopsis

```
<tagged:enumeration value="..." />
```

Description

The `tagged:enumeration` element is a child element of a [tagged:field](#) element. It is used to map the value of an enumerated types to a field in a tagged data message.

Parameters

The `tagged:enumeration` element has one required attribute, `value`, that corresponds to the enumeration value as specified in the logical description of the enumerated type.

Examples

If you had an enumerated type, `flavorType`, with the values `FruityTooty`, `Rainbow`, `BerryBomb`, and `OrangeTango` the logical description of the type would be similar to [Example 37](#).

Example 37: Ice Cream Enumeration

```
<xs:simpleType name="flavorType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="FruityTooty"/>
    <xs:enumeration value="Rainbow"/>
    <xs:enumeration value="BerryBomb"/>
    <xs:enumeration value="OrangeTango"/>
  </xs:restriction>
</xs:simpleType>
```

`flavorType` would be mapped to a tagged data field as shown in [Example 38](#).

Example 38: Tagged Data Ice Cream Mapping

```
<tagged:field name="flavor">
  <tagged:enumeration value="FruityTooty"/>
  <tagged:enumeration value="Rainbow"/>
  <tagged:enumeration value="BerryBomb"/>
  <tagged:enumeration value="OrangeTango"/>
</tagged:field>
```

tagged:sequence

Synopsis

```
<tagged:sequence name="..." alias="..." occurs="...">
  ...
</tagged:sequence>
```

Description

The `tagged:sequence` element is a child of a [tagged:body](#) element, a `tagged:sequence` element, or a [tagged:case](#) element. It maps arrays and sequence complex types to fields in a tagged data message. A `tagged:sequence` element contains one or more children to map the corresponding logical type's parts to fields in a tagged data message. The child elements can be of the following types:

- [tagged:field](#)
- [tagged:sequence](#)
- [tagged:choice](#)

Attributes

The `tagged:sequence` element has three attributes:

<code>name</code>	Specifies the name of the logical message part that is being mapped into the tagged data message. This is a required attribute.
<code>alias</code>	Specifies an alias for the sequence that can be used to identify it on the wire.
<code>occurs</code>	Specifying the number of times the sequence appears. This attribute is used to map arrays.

Examples

A structure containing a name, a date, and an ID number would contain three `tagged:field` elements to fully describe the mapping of the data to the fixed record message. [Example 39](#) shows an Artix contract fragment for such a mapping.

Example 39: Mapping a Sequence to a Tagged Data Format

```
<?xml version="1.0" encoding="UTF-8"?>
<definitions name="taggedDataMappingsample"
  targetNamespace="http://www.iona.com/taggedService"
  xmlns="http://schemas.xmlsoap.org/wsdl/"
  xmlns:fixed="http://schemas.iona.com/bindings/tagged"
  xmlns:tns="http://www.iona.com/taggedService"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <types>
    <schema targetNamespace="http://www.iona.com/taggedService"
      xmlns="http://www.w3.org/2001/XMLSchema"
      xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
      <xsd:complexType name="person">
        <xsd:sequence>
          <xsd:element name="name" type="xsd:string"/>
          <xsd:element name="date" type="xsd:string"/>
          <xsd:element name="ID" type="xsd:int"/>
        </xsd:sequence>
      </xsd:complexType>
    ...
  </types>
  <message name="taggedSequence">
    <part name="personPart" type="tns:person"/>
  </message>
  <portType name="taggedSequencePortType">
    ...
  </portType>
```

Example 39: Mapping a Sequence to a Tagged Data Format

```
<binding name="taggedSequenceBinding"
  type="tns:taggedSequencePortType">
  <tagged:binding selfDescribing="false" fieldSeparator="pipe"/>
  ...
  <tagged:sequence name="personPart">
    <tagged:field name="name"/>
    <tagged:field name="date"/>
    <tagged:field name="ID"/>
  </tagged:sequence>
  ...
</binding>
...
</definition>
```

tagged:choice

Synopsis

```
<tagged:choice name="..." discriminatorName="..." alias="...">
  <tagged:case ...>
    ...
  ...
</tagged:choice>
```

The `tagged:choice` element is a child of a [tagged:body](#) element, a [tagged:sequence](#) element, or a [tagged:case](#) element. It maps unions to a field in a tagged data message. A `tagged:choice` element may contain one or more [tagged:case](#) child elements to map the cases for the union to a field in a tagged data message.

Parameters

The `tagged:choice` element has three attributes:

<code>name</code>	Specifies the name of the logical message part being mapped into the tagged data message. This is a required attribute.
<code>discriminatorName</code>	Specifies the message part used as the discriminator for the union.
<code>alias</code>	Specifies an alias for the union that can be used to identify it on the wire.

tagged:case

Synopsis

```
<tagged:case value="..." />
```

Description

The `tagged:case` element is a child element of a `tagged:choice` element. It describes the complete mapping of a union's individual cases to a field in a tagged data message. A `tagged:case` element must have one child element to describe the mapping of the case's data to a field, or fields, to a tagged data message. Valid child elements are [tagged:field](#), [tagged:sequence](#), and [tagged:choice](#).

Attributes

The `tagged:case` element has one required attribute, `name`, that corresponds to the name of the case element in the union's logical description.

Examples

[Example 40](#) shows an Artix contract fragment mapping a union to a tagged data format.

Example 40: Mapping a Union to a Tagged Data Format

```
<?xml version="1.0" encoding="UTF-8"?>
<definitions name="fixedMappingsample"
  targetNamespace="http://www.iona.com/tagService"
  xmlns="http://schemas.xmlsoap.org/wsdl/"
  xmlns:fixed="http://schemas.iona.com/bindings/tagged"
  xmlns:tns="http://www.iona.com/tagService"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <types>
    <schema targetNamespace="http://www.iona.com/tagService"
      xmlns="http://www.w3.org/2001/XMLSchema"
      xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
      <xsd:complexType name="unionStationType">
        <xsd:choice>
          <xsd:element name="train" type="xsd:string"/>
          <xsd:element name="bus" type="xsd:int"/>
          <xsd:element name="cab" type="xsd:int"/>
          <xsd:element name="subway" type="xsd:string"/>
        </xsd:choice>
      </xsd:complexType>
    ...
  </types>
  <message name="tagUnion">
    <part name="stationPart" type="tns:unionStationType"/>
  </message>
```

Example 40: Mapping a Union to a Tagged Data Format

```
<portType name="tagUnionPortType">
...
</portType>
<binding name="tagUnionBinding" type="tns:tagUnionPortType">
  <tagged:binding selfDescribing="false"
    fieldSeparator="comma"/>
...
  <tagged:choice name="stationPart" discriminatorName="disc">
    <tagged:case name="train">
      <tagged:field name="name"/>
    </tagged:case>
    <tagged:case name="bus">
      <tagged:field name="number"/>
    </tagged:case>
    <tagged:case name="cab">
      <tagged:field name="number"/>
    </tagged:case>
    <tagged:case name="subway">
      <tagged:field name="name"/>
    </tagged:case>
  </tagged:choice>
...
</binding>
...
</definition>
```


TibrvMsg Binding

The Artix TibrvMsg binding elements describe a mapping between XMLSchema messages and the TibrvMsg messages used by Tibco Rendezvous.

Namespace

The IONA extensions used to describe TibrvMsg bindings are defined in the namespace `http://schemas.iona.com/transport/tibrv`. Artix tools use the prefix `tibrv` to represent the tagged data extensions. Add the following line to the `definitions` element of your contract:

```
xmlns:tibrv="http://schemas.iona.com/transport/tibrv"
```

TIBRVMSG to XMLSchema Type Mapping

Table 5 shows how TibrvMsg data types are mapped to XMLSchema types in Artix contracts.

Table 5: *TIBCO to XMLSchema Type Mapping*

TIBRVMSG	XSD
TIBRVMSG_STRING	xsd:string
TIBRVMSG_BOOL	xsd:boolean
TIBRVMSG_I8	xsd:byte

Table 5: *TIBCO to XMLSchema Type Mapping*

TIBRVMSG	XSD
TIBRVMSG_I16	xsd:short
TIBRVMSG_I32	xsd:int
TIBRVMSG_I64	xsd:long
TIBRVMSG_U8	xsd:unsignedByte
TIBRVMSG_U16	xsd:unsignedShort
TIBRVMSG_U32	xsd:unsignedInt
TIBRVMSG_U64	xsd:unsignedLong
TIBRVMSG_F32	xsd:float
TIBRVMSG_F64	xsd:double
TIBRVMSG_STRING	xsd:decimal
TIBRVMSG_DATETIME ^a	xsd:dateTime
TIBRVMSG_OPAQUE	xsd:base64Binary
TIBRVMSG_OPAQUE	xsd:hexBinary
TIBRVMSG_STRING	xsd:QName
TIBRVMSG_STRING	xsd:nonPositiveInteger
TIBRVMSG_STRING	xsd:negativeInteger
TIBRVMSG_STRING	xsd:nonNegativeInteger
TIBRVMSG_STRING	xsd:positiveInteger
TIBRVMSG_STRING	xsd:time
TIBRVMSG_STRING	xsd:date
TIBRVMSG_STRING	xsd:gYearMonth
TIBRVMSG_STRING	xsd:gMonthDay
TIBRVMSG_STRING	xsd:gDay
TIBRVMSG_STRING	xsd:gMonth

Table 5: *TIBCO to XMLSchema Type Mapping*

TIBRVMSG	XSD
TIBRVMSG_STRING	xsd:anyURI
TIBRVMSG_STRING	xsd:token
TIBRVMSG_STRING	xsd:language
TIBRVMSG_STRING	xsd:NMTOKEN
TIBRVMSG_STRING	xsd>Name
TIBRVMSG_STRING	xsd:NCName
TIBRVMSG_STRING	xsd:ID

a. While TIBRVMSG_DATETIME has microsecond precision, `xsd:dateTime` only supports millisecond precision. Therefore, Artix rounds all times to the nearest millisecond.

tibrv:binding

Synopsis

```
<tibrv:binding stringEncoding="..." stringAsOpaque="...">
  ...
</tibrv:binding>
```

Description

The `tibrv:binding` element is a child of the WSDL `binding` element. It identifies that the data is to be packed into a `TibrvMsg`. The `tibrv:binding` element can be used to set a default array policy for the `TibrvMsg` generated by the binding by adding a `tibrv:array` child element.

The `tibrv:binding` element can also define binding-only message data by including child elements. The following elements can be a child:

- [tibrv:msg](#)
- [tibrv:field](#)
- [tibrv:context](#)

Any binding-only data defined at the binding level is attached to all messages that use the binding.

Attributes

The `tibrv:binding` element has the following attributes:

<code>stringEncoding</code>	Specifies the character set used in encoding string data included in the message. The default value is <code>utf-8</code> .
<code>stringAsOpaque</code>	Specifies how string data is passed in messages. <code>false</code> , the default value, specifies that strings data is passed as <code>TIREMSG_STRING</code> . <code>true</code> specifies that string data is passed as <code>OPAQUE</code> .

tibrv:operation**Synopsis**

```
<tibrv:operation>
  ...
</tibrv:operation>
```

Description

The `tibrv:operation` element is a child of a WSDL `operation` element. It signifies that the messages used for this operation are mapped into a `TibrvMsg` and defines any operation specific array policies and data fields.

A `tibrv:operation` element can specify an operation specific array policy by adding a child `tibrv:array` element. This array policy overrides any array policy set at the binding level.

A `tibrv:operation` element can define binding-only message data to be inserted into all `TibrvMsg` messages generated by the operation by adding children to define the data. The following elements are valid children:

- [tibrv:msg](#)
- [tibrv:field](#)
- [tibrv:context](#)

Any binding-only data defined by a `tibrv:operation` element is attached to all messages generated by the operation.

tibrv:input**Synopsis**

```
<tibrv:input messageNameFieldPath="..."
  messageNameFieldValue="..."
  stringEncoding="..."
```

```

stringAsOpaque="...">
...
</tibrv:input>

```

Description

The `tibrv:input` element is a child of a WSDL `input` element. It defines the exact mapping of the logical input message to the `TibrvMsg` that is used to make requests on a service. When the `tibrv:input` element does not have any children, it signifies that the default XMLSchema message to `TibrvMsg` message mappings are used. If you want to define a custom mapping from the XMLSchema message to the `TibrvMsg` message, want to add context information to the `TibrvMsg` message, or want to add binding only elements to the `TibrvMsg` message, you can add children to the `tibrv:input` element. Valid child elements include:

- [tibrv:msg](#)
- [tibrv:field](#)
- [tibrv:context](#)

A `tibrv:input` element can specify an operation specific array policy by adding a child [tibrv:array](#) element. This array policy overrides any array policy set at the binding level or the operation level.

Attributes

The `tibrv:input` element has the following attributes:

<code>messageNameFieldPath</code>	Specifies the field path that includes the message name. If this attribute is not specified, the first field in the top level message will be used as the message name and given the value <code>IT_BUS_MESSAGE_NAME</code> .
<code>messageNameFieldValue</code>	Specifies the field value that corresponds to the message name. If this attribute is not specified, the value of the WSDL <code>message</code> element's <code>name</code> attribute will be used.
<code>stringEncoding</code>	Specifies the character set used in encoding string data included in the message. This value will override the value set in tibrv:binding .
<code>stringAsOpaque</code>	Specifies how string data is passed in the message. <code>false</code> specifies that strings data is passed as <code>TIBRVMSG_STRING</code> . <code>true</code> specifies that string data is passed as <code>OPAQUE</code> . This value will override the value set in tibrv:binding .

tibrv:output

Synopsis

```
<tibrv:outputmessageNameFieldPath="..."
    messageNameFieldValue="..."
    stringEncoding="..."
    stringAsOpaque="...">
    ...
</tibrv:output>
```

Description

The `tibrv:output` element is a child of a WSDL `output` element. It defines the exact mapping of the logical output message to the `TibrvMsg` that is used when responding to requests. When the `tibrv:output` element does not have any children, it signifies that the default XMLSchema message to `TibrvMsg` message mappings are used. If you want to define a custom mapping from the XMLSchema message to the `TibrvMsg` message, want to add context information to the `TibrvMsg` message, or want to add binding only elements to the `TibrvMsg` message, you can add children to the `tibrv:output` element. Valid child elements include:

- [tibrv:msg](#)
- [tibrv:field](#)
- [tibrv:context](#)

A `tibrv:output` element can specify an operation specific array policy by adding a child `tibrv:array` element. This array policy overrides any array policy set at the binding level or the operation level.

Attributes

The `tibrv:output` element has the following attributes:

<code>messageNameFieldPath</code>	Specifies the field path that includes the message name. If this attribute is not specified, the first field in the top level message will be used as the message name and given the value <code>IT_BUS_MESSAGE_NAME</code> .
<code>messageNameFieldValue</code>	Specifies the field value that corresponds to the message name. If this attribute is not specified, the value of the WSDL <code>message</code> element's <code>name</code> attribute will be used.
<code>stringEncoding</code>	Specifies the character set used in encoding string data included in the message. This value will override the value set in tibrv:binding .

<code>stringAsOpaque</code>	Specifies how string data is passed in the message. <code>false</code> specifies that strings data is passed as <code>TIBRMSG_STRING</code> . <code>true</code> specifies that string data is passed as <code>OPAQUE</code> . This value will override the value set in tibrv:binding .
-----------------------------	---

tibrv:array

Synopsis

```
<tibrv:array elementName="..." integralAsSingleField="..."
    loadSize="..." sizeName="..." />
```

Description

The `tibrv:array` element defines how arrays are mapped into elements as a `TibrvMsg` message. The array mapping properties can be set at any level of granularity by making it the child of different `TibrvMsg` binding elements. The array mapping properties at lower levels always override the array mapping properties. For example, the mapping properties defined by a `tibrv:array` element that is the child of a [tibrv:msg](#) element will override the array mapping properties defined by a `tibrv:array` element that is a child of the parent [tibrv:operation](#) element.

Attributes

The array mapping properties are set using the attributes of the `tibrv:array` element. The `tibrv:array` element has the following attributes:

<code>elementName</code>	Specifies an expression that when evaluated will be used as the name of the <code>TibrvMsg</code> field to which array elements are mapped. The default element naming scheme is to concatenate the value of WSDL <code>element</code> element's <code>name</code> attribute with a counter. For information on specifying naming expressions see “Custom array naming expressions” .
<code>integralAsSingleField</code>	Specifies how scalar array data is mapped into <code>TibrvMsgField</code> instances. <code>true</code> , the default, specifies that arrays are mapped into a single <code>TibrvMsgField</code> . <code>false</code> specifies that each member of an array is mapped into a separate <code>TibrvMsgField</code> .

loadSize	Specifies if the number of elements in an array is included in the TibrvMsg. <code>true</code> specifies that the number of elements in the array is added as a TibrvMsgField in the same TibrvMsg as the array. <code>false</code> , the default, specifies that the number of elements in the array is not included in the TibrvMsg.
sizeName	Specifies an expression that when evaluated will be used as the name of the TibrvMsgField to which the size of the array is written. The default naming scheme is to concatenate the value of WSDL <code>element</code> element's <code>name</code> attribute with <code>@size</code> . For information on specifying naming expressions see “Custom array naming expressions” on page 72 .

Custom array naming expressions When specifying a naming policy for array element names you use a string expression that combines XML properties, strings, and custom naming functions. For example, you could use the expression

`concat(xml:attr('name'), '_', counter(1,1))` to specify that each element in the array `street` is named `street_n`.

[Table 6](#) shows the available functions for use in building array element names.

Table 6: *Functions Used for Specifying TibrvMsg Array Element Names*

Function	Purpose
<code>xml:attr('attribute')</code>	Inserts the value of the named attribute.
<code>concat(item1, item2, ...)</code>	Concatenates all of the elements into a single string.
<code>counter(start, increment)</code>	Adds an increasing numerical value. The counter starts at <i>start</i> and increases by <i>increment</i> .

Examples

[Example 41](#) shows an example of an Artix contract containing a TibrvMsg binding that uses array policies. The policies are set at the binding level and:

- Force the name of the TibrvMsg containing array elements to be named `street0`, `street1`, ...

- Write out the number of elements in each street array.
- Force each element of a street array to be written out as a separate field.

Example 41: *TibrvMsg Binding with Array Policies Set*

```
<?xml version="1.0" encoding="UTF-8"?>
<definitions name="widgetOrderForm.wsdl"
  targetNamespace="http://widgetVendor.com/widgetOrderForm"
  xmlns="http://schemas.xmlsoap.org/wsdl/"
  xmlns:tns="http://widgetVendor.com/widgetOrderForm"
  xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
  xmlns:tibrv="http://schemas.iona.com/transport/tibrv"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:xsd1="http://widgetVendor.com/types/widgetTypes">
  <types>
    <schema targetNamespace="http://widgetVendor.com/types/widgetTypes"
      xmlns="http://www.w3.org/2001/XMLSchema"
      xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
      <xsd:complexType name="Address">
        <xsd:sequence>
          <xsd:element name="name" type="xsd:string"/>
          <xsd:element name="street" type="xsd:string" minOccurs="1" maxOccurs="5"
            nillable="true"/>
          <xsd:element name="city" type="xsd:string"/>
          <xsd:element name="state" type="xsd:string"/>
          <xsd:element name="zipCode" type="xsd:string"/>
        </xsd:sequence>
      </xsd:complexType>
    </schema>
  </types>
  <message name="addressRequest">
    <part name="resident" type="xsd:string"/>
  </message>
  <message name="addressResponse">
    <part name="address" type="xsd1:Address"/>
  </message>
  <portType name="theFourOneOne">
    <operation name="lookUp">
      <input message="tns:addressRequest" name="request"/>
      <output message="tns:addressResponse" name="response"/>
    </operation>
  </portType>
```

Example 41: *TibrvMsg Binding with Array Policies Set (Continued)*

```

<binding name="lookUpBinding" type="tns:theFourOneOne">
  <tibrv:binding>
    <tibrv:array elementName="concat(xml:attr('name'), counter(0, 1))"
      integralsAsSingleField="false"
      loadSize="true"/>
  </tibrv:binding>
  <operation name="lookUp">
    <tibrv:operation/>
    <input name="addressRequest">
      <tibrv:input/>
    </input>
    <output name="addressResponse">
      <tibrv:output/>
    </output>
  </operation>
</binding>
<service name="orderWidgetsService">
  <port name="widgetOrderPort" binding="tns:orderWidgetsBinding">
    ...
  </port>
</service>
</definitions>

```

tibrv:msg**Synopsis**

```

<tibrv:msg name="..." alias="..." element="..." id="..."
  minOccurs="..." maxOccurs="...">
  ...
</tibrv:msg>

```

Description

The `tibrv:msg` element instructs Artix to create an instance of a `TibrvMsg`.

Attributes

The `tibrv:msg` element has the following attributes:

<code>name</code>	Specifies the name of the contract element which this <code>TibrvMsg</code> instance gets its value. If this attribute is not present, then the <code>TibrvMsg</code> is considered a binding-only element.
<code>alias</code>	Specifies the value of the <code>name</code> member of the <code>TibrvMsg</code> instance. If this attribute is not specified, then the binding will use the value of the <code>name</code> attribute.

<code>element</code>	Used only when <code>tibrv:msg</code> is an immediate child of <code>tibrv:context</code> . Specifies the QName of the element defining the context data to use when populating the <code>TibrvMsg</code> .
<code>id</code>	Specifies the value of the <code>id</code> member of the <code>TibrvMsg</code> instance. The default value is <code>0</code> .
<code>minOccurs/</code> <code>maxOccurs</code>	Used only with elements that correspond to logical message parts. The values must be identical to the values specified in the schema definition.

tibrv:field

Synopsis

```
<tibrv:field name="..." alias="..." element="..." id="..."
            type="..." value="..." minOccurs="..." maxOccurs="..." />
```

Description

The `tibrv:field` element instructs Artix to create an instance of a `TibrvMsgField`.

Parameters

The `tibrv:field` element has the following attributes:

<code>name</code>	Specifies the name of the contract element which this <code>TibrvMsgField</code> instance gets its value. If this attribute is not present, then the <code>TibrvMsgField</code> is considered a binding-only element.
<code>alias</code>	Specifies the value of the <code>name</code> member of the <code>TibrvMsgField</code> instance. If this attribute is not specified, then the binding will use the value of the <code>name</code> attribute.
<code>element</code>	Used only when <code>tibrv:field</code> is an immediate child of <code>tibrv:context</code> . Specifies the QName of the element defining the context data to use when populating the <code>TibrvMsgField</code> .
<code>id</code>	Specifies the value of the <code>id</code> member of the <code>TibrvMsgField</code> instance. The default value is <code>0</code> .
<code>type</code>	Specifies the XML Schema type of the data being used to populate the <code>data</code> member of the <code>TibrvMsgField</code> instance.
<code>value</code>	Specifies the value inserted into the <code>data</code> member of the <code>TibrvMsgField</code> instance when the field is a binding-only element.
<code>minOccurs/</code> <code>maxOccurs</code>	Used only with elements that correspond to logical message parts. The values must be identical to the values specified in the schema definition.

tibrv:context

Synopsis

```
<tibrv:context>
  ...
</tibrv:context>
```

Description

The `tibrv:context` element specifies that the following message parts are populated from an Artix context. The child of a `tibrv:context` element can be either:

- a `tibrv:msg` element if the context data is a complex type.
- a `tibrv:msg` element if you wanted to wrap the context data with a TibrvMsg on the wire.
- a `tibrv:field` element if the context data is a native XMLSchema type.

When a `tibrv:msg` element or a `tibrv:field` element are used to insert context information into a TibrvMsg they use the `element` attribute in place of the `name` attribute. The `element` attribute specifies the QName used to register the context data with Artix bus. It must correspond to a globally defined XML Schema element. Also, when inserting context information you cannot specify values for any other attributes except the `alias` attribute.

Examples

If you were integrating with a Tibco server that used a header to correlate messages using an ASCII correlation ID, you could use the TibrvMsg binding's context support to implement the correlation ID on the Artix side of the solution. The first step would be to define an XML Schema element called `corrID` for the context that would hold the correlation ID. Then in your TibrvMsg binding definition you would include a `tibrv:context` element in the `tibrv:binding` element to specify that all messages passing through the binding will have the header. [Example 42](#) shows a contract fragment containing the appropriate entries for this scenario.

Example 42: Using Context Data in a TibrvMsg Binding

```
<definitions
  xmlns:xsd1="http://widgetVendor.com/types/widgetTypes"
  ...>
```

Example 42: Using Context Data in a TibrvMsg Binding

```
<types>
  <schema
    targetNamespace="http://widgetVendor.com/types/widgetTypes"
    xmlns="http://www.w3.org/2001/XMLSchema"
    xmlns:wSDL="http://schemas.xmlsoap.org/wSDL/">
    ...
    <element name="corrID" type="xsd:string"/>
    ...
  </schema>
</types>
...
<portType name="correlatedService">
...
</portType>
<binding name="tibrvCorrBinding" type="correlatedService">
  <tibrv:binding>
    <tibrv:context>
      <tibrv:field element="xsd1:corrID"/>
    </tibrv:context>
  </tibrv:binding>
  ...
</binding>
...
</definitions>
```

The context for `corrID` will be registered with the Artix bus using the QName `"http://widgetVendor.com/types/widgetTypes", "corrID"`.

See also

For information on using contexts in Artix applications, see [Developing Artix Applications with C++](#) or [Developing Artix Applications with Java](#).

XML Binding

Artix includes a binding that supports the exchange of XML documents with the overhead of a SOAP envelope.

Namespace

The IONA extensions used to describe XML format bindings are defined in the namespace `http://celtix.objectweb.org/bindings/xmlformat`. Artix tools use the prefix `xformat` to represent the XML binding extensions. Add the following line to your contracts:

```
xmlns:xformat="http://celtix.objectweb.org/bindings/xmlformat"
```

xformat:binding

Synopsis

```
<xformat:binding rootNode="..." />
```

Description

The `xformat:binding` element is the child of the WSDL `binding` element. It signifies that the messages passing through this binding will be sent as XML documents without a SOAP envelope.

Attributes

The `xformat:binding` element has a single optional attribute called `rootNode`. The `rootNode` attribute specifies the QName for the element that serves as the root node for the XML document generated by Artix. When the `rootNode` attribute is not set, Artix uses the root element of the message part as the root element when using doc style messages or an element using the message part name as the root element when using RCP style messages.

xformat:body

Synopsis

```
<xformat:body rootNode="..." />
```

Description

The `xformat:body` element is an optional child of the WSDL `input` element, the WSDL `output` element, and the WSDL `fault` element. It is used to override the value of the `rootNode` attribute specified in the binding's [xformat:binding](#) element.

Attributes

The `xformat:body` element has a single attribute called `rootNode`. The `rootNode` attribute specifies the QName for the element that serves as the root node for the XML document generated by Artix. When the `rootNode` attribute is not set, Artix uses the root element of the message part as the root element when using doc style messages or an element using the message part name as the root element when using RCP style messages.

Part II

Ports

In this part

This part contains the following chapters:

HTTP Port	page 83
CORBA Port	page 101
IIOP Tunnel Port	page 103
WebSphere MQ Port	page 107
JMS Port	page 125
Tuxedo Port	page 129
Tibco/Rendezvous Port	page 131
File Transfer Protocol Port	page 139

HTTP Port

Along with the standard WSDL elements used to specify the location of an HTTP port, Artix uses a number of extensions for fine tuning the configuration of an HTTP port.

In this chapter

This chapter discusses the following topics:

Standard WSDL Elements	page 84
Artix Extension Elements	page 85
Attribute Details	page 91

Standard WSDL Elements

http:address

Synopsis

```
<http:address location="..." />
```

Description

The `http:address` element is a child of the WSDL `port` element. It specifies the address of the HTTP port of a service that is not using SOAP messages to communicate.

Attributes

The `http:address` element has a single required attribute called `location`. The `location` attribute specifies the service's address as a URL.

soap:address

Synopsis

```
<soap:address location="..." />
```

Description

The `soap:address` element is a child of the WSDL `port` element. It specifies the address of the HTTP port of a service that uses SOAP messages to communicate.

Attributes

The `soap:address` element has a single required attribute called `location`. The `location` attribute specifies the service's address as a URL.

Artix Extension Elements

Namespace

[Example 43](#) shows the namespace entries you need to add to the `definitions` element of your contract to use the Artix HTTP extensions.

Example 43: Artix HTTP Extension Namespaces

```
<definitions
  ...
  xmlns:http-conf="http://schemas.ionas.com/transports/http/configuration"
  ... >
```

http-conf:client

Synopsis

```
<http-conf:client SendTimeout="..." RecieveTimeout="..."
  AutoRedirect="..." UserName="..."
  Password="..." AuthorizationType="..."
  Authorization="..." Accept="..."
  AcceptLanguage="..." AcceptEncoding="..."
  ContentType="..." Connection="..."
  Host="..." ConnectionAttepmts="..."
  CacheControl="..." Cookie="..."
  BrowserType="..." Refferer="..."
  ProxyServer="..." ProxyUsername="..."
  ProxyPassword="..." ProxyAuthorizationType="..."
  ProxyAuthorization="..." UseSecureSockets="..."
  ClientCertificates="..." ClientCertificateChain="..."
  ClientPrivateKey="..." ClientPrivateKeyPassword="..."
  TrustedRootCertificate="..." />
```

Description

The `http-conf:client` element is a child of the WSDL `port` element. It is used to specify client-side configuration details.

Attributes

The `http-conf:client` element has the following attributes:

<code>SendTimeout</code>	Specifies the length of time, in milliseconds, the client tries to send a request to the server before the connection is timed out. Default is 30000.
<code>ReceiveTimeout</code>	Specifies the length of time, in milliseconds, the client tries to receive a response from the server before the connection is timed out. The default is 30000.
<code>AutoRedirect</code>	Specifies if a request should be automatically redirected when the server issues a redirection reply via <code>RedirectURL</code> . The default is <code>false</code> , to let the client redirect the request itself.
<code>UserName</code>	Specifies the user name that the client will use for authentication with a service. This value is passed as an attribute in each request's transport header.
<code>Password</code>	Specifies the password that the client will use for authentication with a service. This value is passed as an attribute in each request's transport header.
<u>AuthorizationType</u>	Specifies the name of the authorization scheme the client wishes to use.
<u>Authorization</u>	Specifies the authorization credentials used to perform the authorization.
<u>Accept</u>	Specifies what media types the client is prepared to handle.
<u>AcceptLanguage</u>	Specifies the client's preferred language for receiving responses.
<u>AcceptEncoding</u>	Specifies what content codings the client is prepared to handle.
<u>ContentType</u>	Specifies the media type of the data being sent in the body of the client request.
<u>Host</u>	Specifies the Internet host and port number of the resource on which the client request is being invoked.

Connection	Specifies if the client wants a particular connection to be kept open after each request/response dialog.
ConnectionAttempts	Specifies the number of times a client will transparently attempt to connect to server.
CacheControl	Specifies directives about the behavior that must be adhered to by caches involved in the chain comprising a request from a client to a server.
Cookie	Specifies a static cookie to be sent to the server along with all requests.
BrowserType	Specifies information about the browser from which the client request originates.
Referer	Specifies the URL of the resource that directed the client to make requests on a particular service.
ProxyServer	Specifies the URL of the proxy server, if one exists along the message path.
ProxyUserName	Specifies the username to use for authentication on the proxy server if it requires separate authorization.
ProxyPassword	Specifies the password to use for authentication on the proxy server if it requires separate authorization.
ProxyAuthorizationType	Specifies the name of the authorization scheme used with the proxy server.
ProxyAuthorization	Specifies the authorization credentials used to perform the authorization with the proxy server.
UseSecureSockets	Indicates if the client wants to open a secure connection.
ClientCertificate	Specifies the full path to the PKCS12-encoded X509 certificate issued by the certificate authority for the client.
ClientCertificateChain	Specifies the full path to the file that contains all the certificates in the chain.

<code>ClientPrivateKey</code>	Specifies the full path to the PKCS12-encoded private key that corresponds to the X509 certificate specified by <code>ClientCertificate</code> .
<code>ClientPrivateKeyPassword</code>	Specifies a password that is used to decrypt the PKCS12-encoded private key.
<code>TrustedRootCertificate</code>	Specifies the full path to the PKCS12-encoded X509 certificate for the certificate authority.

http-conf:server

Synopsis

```
<http_conf:server SendTimeout="..." RecieveTimeout="..."
    SurpressClientSendErrors="..."
    SurpressClientRecieveErrors="..."
    HonnorKeepAlive="..." RedirectURL="..."
    CacheControl="..." ContentLocation="..."
    ContentType="..." ContentEncoding="..."
    ServerType="..." UseSecureSockets="..."
    ServerCertificate="..." ServerCertificateChain="..."
    ServerPrivateKey="..." ServerPrivateKeyPassword="..."
    TrustedRootCertificate="..." />
```

Description

The `http-conf:server` element is a child of the WSDL port element. It is used to specify server-side configuration details.

Attributes

The `http-conf:server` element has the following attributes:

<code>SendTimeout</code>	Sets the length of time, in milliseconds, the server tries to send a response to the client before the connection times out. The default is 30000.
<code>ReceiveTimeout</code>	Sets the length of time, in milliseconds, the server tries to receive a client request before the connection times out. The default is 30000.

<code>SuppressClientSendErrors</code>	Specifies whether exceptions are to be thrown when an error is encountered on receiving a client request. The default is <code>false</code> ; exceptions are thrown on encountering errors.
<code>SuppressClientReceiveErrors</code>	Specifies whether exceptions are to be thrown when an error is encountered on sending a response to a client. The default is <code>false</code> ; exceptions are thrown on encountering errors.
<code>HonorKeepAlive</code>	Specifies whether the server honors client requests for a connection to remain open after a response has been sent. The default is <code>Keep-Alive</code> ; <code>Keep-alive</code> requests are honored. <code>false</code> specifies that keep-alive requests are ignored.
<u>RedirectURL</u>	Sets the URL to which the client request should be redirected if the URL specified in the client request is no longer appropriate for the requested resource.
<u>CacheControl</u>	Specifies directives about the behavior that must be adhered to by caches involved in the chain comprising a response from a server to a client.
<code>ContentLocation</code>	Sets the URL where the resource being sent in a server response is located.
<u>ContentType</u>	Sets the media type of the information being sent in a server response, for example, <code>text/html</code> or <code>image/gif</code> .
<u>ContentEncoding</u>	Specifies what additional content codings have been applied to the information being sent by the server.
<code>ServerType</code>	Specifies what type of server is sending the response to the client. Values take the form <i>program-name/version</i> . For example, <code>Apache/1.2.5</code> .

UseSecureSockets

Indicates whether the server wants a secure HTTP connection running over SSL or TLS.

ServerCertificate

Sets the full path to the PKCS12-encoded X509 certificate issued by the certificate authority for the server.

ServerCertificateChain

Sets the full path to the file that contains all the certificates in the server's certificate chain.

ServerPrivateKey

Sets the full path to the PKCS12-encoded private key that corresponds to the X509 certificate specified by `ServerCertificate`.

ServerPrivateKeyPassword

Sets a password that is used to decrypt the PKCS12-encoded private key, if it has been encrypted with a password.

TrustedRootCertificate

Sets the full path to the PKCS12-encoded X509 certificate for the certificate authority. This is used to validate the certificate presented by the client.

Attribute Details

AuthorizationType

Description

The `AuthorizationType` attribute corresponds to the HTTP `AuthorizationType` property. It specifies the name of the authorization scheme the client wishes to use. This information is specified and handled at the application level. Artix does not perform any validation on this value. It is the user's responsibility to ensure that the correct scheme name is specified, as appropriate.

Note: If the client wants to use basic username and password-based authentication this does not need to be set.

Authorization

Description

The `Authorization` attribute corresponds to the HTTP `Authorization` property. It specifies the authorization credentials the client wants the server to use when performing the authorization. The credentials are encoded and handled at the application-level. Artix does not perform any validation on the specified value. It is the user's responsibility to ensure that the correct authorization credentials are specified, as appropriate.

Note: If the client wants to use basic username and password-based authentication this does not need to be set.

Accept

Description

The `Accept` attribute corresponds to the HTTP `Accept` property. It specifies what media types the client is prepared to handle. The value of the attribute is specified using as multipurpose internet mail extensions (MIME) types.

MIME type values

MIME types are regulated by the Internet Assigned Numbers Authority (IANA). They consist of a main type and sub-type, separated by a forward slash. For example, a main type of `text` might be qualified as follows: `text/html` or `text/xml`. Similarly, a main type of `image` might be qualified as follows: `image/gif` or `image/jpeg`.

An asterisk (*) can be used as a wildcard to specify a group of related types. For example, if you specify `image/*`, this means that the client can accept any image, regardless of whether it is a GIF or a JPEG, and so on. A value of `*/*` indicates that the client is prepared to handle any type.

Examples of typical types that might be set are:

- `text/xml`
- `text/html`
- `text/text`
- `image/gif`
- `image/jpeg`
- `application/jpeg`
- `application/msword`
- `application/xbitmap`
- `audio/au`
- `audio/wav`
- `video/avi`
- `video/mpeg`

See also

See <http://www.iana.org/assignments/media-types/> for more details.

AcceptLanguage**Description**

The `AcceptLanguage` attribute corresponds to the HTTP `AcceptLanguage` property. It specifies what language (for example, American English) the client prefers for the purposes of receiving a response.

Specifying the language

Language tags are regulated by the International Organization for Standards (ISO) and are typically formed by combining a language code, determined by the ISO-639 standard, and country code, determined by the ISO-3166 standard, separated by a hyphen. For example, `en-us` represents American English.

See also

A full list of language codes is available at <http://www.w3.org/WAI/ER/IG/ert/iso639.htm>.

A full list of country codes is available at <http://www.iso.ch/iso/en/prods-services/iso3166ma/02iso-3166-code-lists/list-en1.html>.

AcceptEncoding

Description

The `AcceptEncoding` attribute corresponds to the HTTP `AcceptEncoding` Property. It specifies what content encodings the client is prepared to handle. Content encoding labels are regulated by the Internet Assigned Numbers Authority (IANA). Possible content encoding values include `zip`, `gzip`, `compress`, `deflate`, and `identity`.

The primary use of content encodings is to allow documents to be compressed using some encoding mechanism, such as `zip` or `gzip`. Artix performs no validation on content codings. It is the user's responsibility to ensure that a specified content coding is supported at application level.

See also

See <http://www.w3.org/Protocols/rfc2616/rfc2616-sec3.html> for more details on content encodings.

ContentType

Description

The `ContentType` attribute corresponds to the HTTP `ContentType` property. It specifies the media type of the data being sent in the body of a message. Media types are specified using multipurpose internet mail extensions (MIME) types.

MIME type values

MIME types are regulated by the Internet Assigned Numbers Authority (IANA). MIME types consist of a main type and sub-type, separated by a forward slash. For example, a main type of `text` might be qualified as follows: `text/html` or `text/xml`. Similarly, a main type of `image` might be qualified as follows: `image/gif` or `image/jpeg`.

The default type is `text/xml`. Other specifically supported types include:

- `application/jpeg`
- `application/msword`
- `application/xbitmap`
- `audio/au`
- `audio/wav`
- `text/html`
- `text/text`

- `image/gif`
- `image/jpeg`
- `video/avi`
- `video/mpeg`.

Any content that does not fit into any type in the preceding list should be specified as `application/octet-stream`.

Client settings

For clients this attribute is only relevant if the client request specifies the `POST` method to send data to the server for processing.

For web services, this should be set to `text/xml`. If the client is sending HTML form data to a CGI script, this should be set to `application/x-www-form-urlencoded`. If the HTTP `POST` request is bound to a fixed payload format (as opposed to SOAP), the content type is typically set to `application/octet-stream`.

See also

See <http://www.iana.org/assignments/media-types/> for more details.

ContentEncoding

Description

The `ContentEncoding` attribute corresponds to the HTTP `ContentEncoding` property. This property specifies any additional content encodings that have been applied to the information being sent by the server. Content encoding labels are regulated by the Internet Assigned Numbers Authority (IANA). Possible content encoding values include `zip`, `gzip`, `compress`, `deflate`, and `identity`.

The primary use of content encodings is to allow documents to be compressed using some encoding mechanism, such as `zip` or `gzip`. Artix performs no validation on content codings. It is the user's responsibility to ensure that a specified content coding is supported at application level.

See also

See <http://www.w3.org/Protocols/rfc2616/rfc2616-sec3.html> for more details on content encodings.

Host

Description

The `Host` attribute corresponds to the HTTP `Host` property. It specifies the internet host and port number of the resource on which the client request is being invoked. This attribute is typically not required. Typically, this attribute does not need to be set. It is only required by certain DNS scenarios or

application designs. For example, it indicates what host the client prefers for clusters (that is, for virtual servers mapping to the same internet protocol (IP) address).

Connection

Description

The `Connection` attribute specifies whether a particular connection is to be kept open or closed after each request/response dialog. Valid values are `close` and `Keep-Alive`. The default, `Keep-Alive`, specifies that the client want to keep its connection open after the initial request/response sequence. If the server honors it, the connection is kept open until the client closes it. `close` specifies that the connection to the server is closed after each request/response sequence.

CacheControl

Description

The `CacheControl` attribute specifies directives about the behavior of caches involved in the message chain between clients and servers. The attribute is used for both client and server. However, clients and servers have different settings for specifying cache behavior.

Client-side

[Table 7](#) shows the valid settings for `CacheControl` in `http-conf:client`.

Table 7: *Settings for http-conf:client CacheControl*

Directive	Behavior
<code>no-cache</code>	Caches cannot use a particular response to satisfy subsequent client requests without first revalidating that response with the server. If specific response header fields are specified with this value, the restriction applies only to those header fields within the response. If no response header fields are specified, the restriction applies to the entire response.
<code>no-store</code>	Caches must not store any part of a response or any part of the request that invoked it.
<code>max-age</code>	The client can accept a response whose age is no greater than the specified time in seconds.

Table 7: *Settings for http-conf:client CacheControl*

Directive	Behavior
max-stale	The client can accept a response that has exceeded its expiration time. If a value is assigned to <code>max-stale</code> , it represents the number of seconds beyond the expiration time of a response up to which the client can still accept that response. If no value is assigned, it means the client can accept a stale response of any age.
min-fresh	The client wants a response that will be still be fresh for at least the specified number of seconds indicated.
no-transform	Caches must not modify media type or location of the content in a response between a server and a client.
only-if-cached	Caches should return only responses that are currently stored in the cache, and not responses that need to be reloaded or revalidated.
cache-extension	Specifies additional extensions to the other cache directives. Extensions might be informational or behavioral. An extended directive is specified in the context of a standard directive, so that applications not understanding the extended directive can at least adhere to the behavior mandated by the standard directive.

Server-side

Table 8 shows the valid values for `CacheControl` in `http-conf:server`.

Table 8: Settings for `http-conf:server CacheControl`

Directive	Behavior
<code>no-cache</code>	Caches cannot use a particular response to satisfy subsequent client requests without first revalidating that response with the server. If specific response header fields are specified with this value, the restriction applies only to those header fields within the response. If no response header fields are specified, the restriction applies to the entire response.
<code>public</code>	Any cache can store the response.
<code>private</code>	Public (<i>shared</i>) caches cannot store the response because the response is intended for a single user. If specific response header fields are specified with this value, the restriction applies only to those header fields within the response. If no response header fields are specified, the restriction applies to the entire response.
<code>no-store</code>	Caches must not store any part of response or any part of the request that invoked it.
<code>no-transform</code>	Caches must not modify the media type or location of the content in a response between a server and a client.
<code>must-revalidate</code>	Caches must revalidate expired entries that relate to a response before that entry can be used in a subsequent response.
<code>proxy-revalidate</code>	Means the same as <code>must-revalidate</code> , except that it can only be enforced on shared caches and is ignored by private unshared caches. If using this directive, the <code>public</code> cache directive must also be used.
<code>max-age</code>	Clients can accept a response whose age is no greater than the specified number of seconds.

Table 8: Settings for `http-conf:server CacheControl` (Continued)

Directive	Behavior
<code>s-maxage</code>	Means the same as <code>max-age</code> , except that it can only be enforced on shared caches and is ignored by private unshared caches. The age specified by <code>s-maxage</code> overrides the age specified by <code>max-age</code> . If using this directive, the <code>proxy-revalidate</code> directive must also be used.
<code>cache-extension</code>	Specifies additional extensions to the other cache directives. Extensions might be informational or behavioral. An extended directive is specified in the context of a standard directive, so that applications not understanding the extended directive can at least adhere to the behavior mandated by the standard directive.

BrowserType

Description

The `BrowserType` attribute specifies information about the browser from which the client request originates. In the HTTP specification from the World Wide Web consortium (W3C) this is also known as the *user-agent*. Some servers optimize based upon the client that is sending the request.

Referer

The `Referer` attribute corresponds to the HTTP Referer property. It specifies the URL of the resource that directed the client to make requests on a particular service. Typically this HTTP property is used when a request is the result of a browser user clicking on a hyperlink rather than typing a URL. This can allow the server to optimize processing based upon previous task flow, and to generate lists of back-links to resources for the purposes of logging, optimized caching, tracing of obsolete or mistyped links, and so on. However, it is typically not used in web services applications.

If the `AutoRedirect` attribute is set to `true` and the client request is redirected, any value specified in the `Referer` attribute is overridden. The value of the HTTP Referer property will be set to the URL of the service who redirected the client's original request.

ProxyServer

Description

The `ProxyServer` attribute specifies the URL of the proxy server, if one exists along the message path. A proxy can receive client requests, possibly modify the request in some way, and then forward the request along the chain possibly to the target server. A proxy can act as a special kind of security firewall.

Note: Artix does not support the existence of more than one proxy server along the message path.

ProxyAuthorizationType

Description

The `ProxyAuthorizationType` attribute specifies the name of the authorization scheme the client wants to use with the proxy server. This name is specified and handled at application level. Artix does not perform any validation on this value. It is the user's responsibility to ensure that the correct scheme name is specified, as appropriate.

Note: If basic username and password-based authentication is being used by the proxy server, this does not need to be set.

ProxyAuthorization

Description

The `ProxyAuthorization` attribute specifies the authorization credentials the client will use to perform authorization with the proxy server. These are encoded and handled at application-level. Artix does not perform any

validation on the specified value. It is the user's responsibility to ensure that the correct authorization credentials are specified, as appropriate.

Note: If basic username and password-based authentication is being used by the proxy server, this does not need to be set.

UseSecureSockets

Description

The `UseSecureSockets` attribute indicates if the application wants to open a secure connection using SSL or TLS. A secure HTTP connection is commonly referred to as HTTPS. Valid values are `true` and `false`. The default is `false`; the endpoint does not want to open a secure connection.

Note: If the `http:address` element's `location` attribute, or the `soap:address` element's `location` attribute, has a value with a prefix of `https://`, a secure HTTP connection is automatically enabled, even if `UseSecureSockets` is not set to `true`.

RedirectURL

Description

The `RedirectURL` attribute corresponds to the HTTP RedirectURL property. It specifies the URL to which the client request should be redirected if the URL specified in the client request is no longer appropriate for the requested resource. In this case, if a status code is not automatically set in the first line of the server response, the status code is set to 302 and the status description is set to `Object Moved`.

ServerCertificateChain

Description

PKCS12-encoded X509 certificates can be issued by intermediate certificate authorities that are not trusted by the client, but which have had their certificates issued in turn by a trusted certificate authority. If this is the case, you can use the `ServerCertificateChain` attribute to allow the certificate chain of PKCS12-encoded X509 certificates to be presented to the client for verification. It specifies the full path to the file that contains all the certificates in the chain.

CORBA Port

Artix supports a robust mechanism for configuring a CORBA endpoint.

Namespace

The namespace under which the CORBA extensions are defined is `http://schemas.iona.com/bindings/corba`. If you are going to add a CORBA port by hand you will need to add this to your contract's `definition` element as shown below.

```
xmlns:corba="http://schemas.iona.com/bindings/corba"
```

corba:address

Synopsis

```
<corba:address location="..."/>
```

Description

The `corba:address` element is a child of a WSDL `port` element. It specifies the IOR for the service's CORBA object.

Attributes

The `corba:address` element has one required attribute named `location`. The `location` attribute contains a string specifying the IOR. You have four options for specifying IORs in Artix contracts:

- Entering the object's IOR directly into the contract using the stringified IOR format:

```
IOR:22342...
```

- Entering a file location for the IOR using the following syntax:

```
file:///file_name
```

Note: The file specification requires three backslashes (///).

- Entering the object's name using the `corbaname` format:

```
corbaname:rir/NameService#object_name
```

When you use the `corbaname` format for specifying the IOR, Artix will look-up the object's IOR in the CORBA name service.

- Entering the port at which the service exposes itself, using the `corbaloc` syntax.

```
corbaloc:iiop:host:port/service_name
```

corba:policy

Synopsis

```
<corba:policy poaname="..."|persistent="..."|serviceid="..." />
```

Description

The `corba:policy` element is a child of a WSDL `port` element. It specifies the POA policies the Artix service will use when creating the POA for connecting to a CORBA object. Each `corba:policy` element can only specify one policy. Therefore to define multiple policies you must use multiple `corba:policy` elements.

Attributes

The `corba:policy` element uses attributes to specify the policy it is describing. The following attributes are used:

<code>poaname</code>	Specifies the POA name to use when connecting to the CORBA object. The default POA name is <code>WS_ORB</code> .
<code>persistent</code>	Specifies the value of the POA's persistence policy. The default is <code>false</code> ; the POA is not persistent.
<code>serviceid</code>	Specifies the value of the POA's ID. By default, Artix POAs are assigned their IDs by the ORB.

See also

For more information about CORBA POA policies see the Orbix documentation.

IIOp Tunnel Port

The IIOp tunnel transport allows you to send non-CORBA data over IIOp. This allows you to use a number of the CORBA services.

Namespace

The namespace under which the CORBA extensions are defined is `http://schemas.iona.com/bindings/iiop_tunnel`. If you are going to add a CORBA port by hand you will need to add this to your contract's definition element as shown below.

```
xmlns:iiop="http://schemas.iona.com/bindings/iiop_tunnel"
```

iiop:address

Synopsis

```
<iiop:address location="..."/>
```

Description

The `iiop:address` element is a child of a WSDL `port` element. It specifies the IOR for the CORBA object created for the service.

Attributes

The `iiop:address` element has one required attribute named `location`. The `location` attribute contains a string specifying the IOR. You have four options for specifying IORs in Artix contracts:

- Entering the object's IOR directly into the contract using the stringified IOR format:

```
IOR:22342...
```

- Entering a file location for the IOR using the following syntax:

```
file:///file_name
```

Note: The file specification requires three backslashes (///).

- Entering the object's name using the `corbaname` format:

```
corbaname:rir/NameService#object_name
```

When you use the `corbaname` format for specifying the IOR, Artix will look-up the object's IOR in the CORBA name service.

- Entering the port at which the service exposes itself, using the `corbaloc` syntax.

```
corbaloc:iiop:host:port/service_name
```

iiop:payload

Synopsis

```
<iiop:payload type="..." />
```

Description

The `iiop:payload` element is a child of the WSDL `port` element. It specifies the type of payload being passed through the IIOP tunnel. If the `iiop:payload` element is set, Artix will use the information to attempt codeset negotiation on the contents of the payload being sent through the tunnel. If you do not want codeset negotiation attempted, do not use this element in your IIOP Tunnel port definition.

Attributes

The `iiop:payload` element has a single required element named `type`. The `type` attribute specifies the type of data contained in the payload.

Examples

If your payload contains string data and you want Artix to attempt codeset negotiation you would use the following:

```
<iiop:payload type="string"/>
```

iiop:policy

Synopsis

```
<iiop:policy poaname="..."|persistent="..."|serviceid="..." />
```

Description

The `iiop:policy` element is a child of a WSDL `port` element. It specifies the POA policies the Artix service will use when creating the POA for the IIOP port. Each `iiop:policy` element can only specify one policy. Therefore to define multiple policies you must use multiple `iiop:policy` elements.

Attributes

The `iiop:policy` element uses attributes to specify the policy it is describing. The following attributes are used:

<code>poaname</code>	Specifies the POA name to use when creating the IIOP port. The default POA name is <code>ws_ORB</code> .
<code>persistent</code>	Specifies the value of the POA's persistence policy. The default is <code>false</code> ; the POA is not persistent.
<code>serviceid</code>	Specifies the value of the POA's ID. By default, Artix POAs are assigned their IDs by the ORB.

See also

For more information about CORBA POA policies see the Orbix documentation.

WebSphere MQ Port

Artix provides a number of WSDL extensions to configure a WebSphere MQ service.

In this chapter

This chapter discusses the following topics:

Artix Extension Elements	page 108
Attribute Details	page 113

Artix Extension Elements

Namespace

The WSDL extensions used to describe WebSphere MQ transport details are defined in the WSDL namespace

`http://schemas.ionas.com/transport/mq`. If you are going to use a WebSphere MQ port you need to include the following in the `definitions` tag of your contract:

```
xmlns:mq="http://schemas.ionas.com/transport/mq"
```

mq:client

Synopsis

```
<mq:client QueueManager="..." QueueName="..."
  ReplyQueueManager="..." ReplyQueueName="..."
  Server_Client="..." ModelQueueName="..."
  AliasQueueName="..." ConnectionName="..."
  ConnectionReusable="..." ConnectionFastPath="..."
  UsageStyle="..." CorrelationStyle="..." AccessMode="..."
  Timeout="..." MessageExpiry="..." MessagePriority="..."
  Delivery="..." Transactional="..." ReportOption="..."
  Format="..." MessageId="..." CorrelationId="..."
  ApplicationData="..." AccountingToken="..."
  ApplicationIdData="..." ApplicationOriginData="..."
  UserIdentification="..." />
```

Description

The `mq:client` element is used to configure a client endpoint for connecting to WebSphere MQ. For an MQ client endpoint that receives replies you must provide values for the `QueueManager`, `QueueName`, `ReplyQueueManager`, and `ReplyQueueName` attributes. If the endpoint is not going to receive replies, you do not need to supply settings for the reply queue.

Attributes

The `mq:client` element has the following attributes:

<code>QueueManager</code>	Specifies the name of the queue manager used for making requests.
---------------------------	---

QueueName	Specifies the name of the queue used for making requests.
ReplyQueueName	Specifies the name of the queue used for receiving responses.
ReplyQueueManager	Specifies the name of the queue manager used for receiving responses.
Server_Client	Specifies which MQ libraries are to be used.
ModelQueueName	Specifies the name of the queue to use as a model for creating dynamic queues.
AliasQueueName	Specifies the local name of the reply queue when the reply queue manager is not on the same host as the client's local queue manager.
ConnectionName	Specifies the name of the connection Artix uses to connect to its queue.
ConnectionReusable	Specifies if the connection can be used by more than one application. The default is <code>false</code> ; the connection is not reusable.
ConnectionFastPath	Specifies if the queue manager will be loaded in process. The default is <code>false</code> ; the queue manager runs as a separate process.
UsageStyle	Specifies if messages can be queued without expecting a response.
CorrelationStyle	Specifies what identifier is used to correlate request and response messages.
AccessMode	Specifies the level of access applications have to the queue.
Timeout	Specifies the amount of time, in milliseconds, between a request and the corresponding reply before an error message is generated.
MessageExpiry	Specifies the value of the MQ message descriptor's <code>Expiry</code> field. It specifies the lifetime of a message in tenths of a second. The default value is <code>INFINITE</code> ; messages never expire.
MessagePriority	Specifies the value of the MQ message descriptor's <code>Priority</code> field.

<code>Delivery</code>	Specifies the value of the MQ message descriptor's <code>Persistence</code> field.
<code>Transactional</code>	Specifies if transaction operations must be performed on the messages.
<code>ReportOption</code>	Specifies the value of the MQ message descriptor's <code>Report</code> field.
<code>Format</code>	Specifies the value of the MQ message descriptor's <code>Format</code> field.
<code>MessageId</code>	Specifies the value of the MQ message descriptor's <code>MsgId</code> field. A value must be specified if <code>CorrelationStyle</code> is set to <code>none</code> .
<code>CorrelationId</code>	Specifies the value for the MQ message descriptor's <code>CorrelId</code> field. A value must be specified if <code>CorrelationStyle</code> is set to <code>none</code> .
<code>ApplicationData</code>	Specifies any application-specific information that needs to be set in the message header.
<code>AccountingToken</code>	Specifies the value for the MQ message descriptor's <code>AccountingToken</code> field.
<code>ApplicationIdData</code>	Specifies the value for the MQ message descriptor's <code>ApplIdentityData</code> field.
<code>ApplicationOriginData</code>	Specifies the value for the MQ message descriptor's <code>ApplOriginData</code> field.
<code>UserIdentification</code>	Specifies the value for the MQ message descriptor's <code>UserIdentifier</code> field.

mq:server

Synopsis

```
<mq:server QueueManager="..." QueueName="..."
  ReplyQueueManager="..." ReplyQueueName="..."
  Server_Client="..." ModelQueueName="..."
  ConnectionName="..." ConnectionReusable="..."
  ConnectionFastPath="..." UsageStyle="..."
  CorrelationStyle="..." AccessMode="..." Timeout="..."
  MessageExpiry="..." MessagePriority="..." Delivery="..."
  Transactional="..." ReportOption="..." Format="..."
```

```

MessageId="..." CorrelationId="..." ApplicationData="..."
AccountingToken="..." ApplicationOriginData="..."
PropagateTransactions="..." />

```

Description

The `mq:server` element is used to configure a server endpoint for connecting to WebSphere MQ. For an MQ server endpoint you must provide values for the `QueueManager` and `QueueName` attributes.

Attributes

The `mq:server` element has the following attributes:

<code>QueueManager</code>	Specifies the name of the queue manager used for receiving requests.
<code>QueueName</code>	Specifies the name of the queue used to receive requests.
<code>ReplyQueueName</code>	Specifies the name of the queue where responses are placed. This setting is ignored if the client specifies a <code>ReplyToQ</code> in a request's message descriptor.
<code>ReplyQueueManager</code>	Specifies the name of the reply queue manager. This setting is ignored if the client specifies a <code>ReplyToQMgr</code> in a request's message descriptor.
<code>Server_Client</code>	Specifies which MQ libraries are to be used.
<code>ModelQueueName</code>	Specifies the name of the queue to use as a model for creating dynamic queues.
<code>ConnectionName</code>	Specifies the name of the connection Artix uses to connect to its queue.
<code>ConnectionReusable</code>	Specifies if the connection can be used by more than one application. The default is <code>false</code> ; the connection is not reusable.
<code>ConnectionFastPath</code>	Specifies if the queue manager will be loaded in process. The default is <code>false</code> ; the queue manager runs as a separate process.
<code>UsageStyle</code>	Specifies if messages can be queued without expecting a response.
<code>CorrelationStyle</code>	Specifies what identifier is used to correlate request and response messages.
<code>AccessMode</code>	Specifies the level of access applications have to the queue.

Timeout	Specifies the amount of time, in milliseconds, between a request and the corresponding reply before an error message is generated.
MessageExpiry	Specifies the value of the MQ message descriptor's <code>Expiry</code> field. It specifies the lifetime of a message in tenths of a second. The default value is <code>INFINITE</code> ; messages never expire.
MessagePriority	Specifies the value of the MQ message descriptor's <code>Priority</code> field.
Delivery	Specifies the value of the MQ message descriptor's <code>Persistence</code> field.
Transactional	Specifies if transaction operations must be performed on the messages.
ReportOption	Specifies the value of the MQ message descriptor's <code>Report</code> field.
Format	Specifies the value of the MQ message descriptor's <code>Format</code> field.
MessageId	Specifies the value of the MQ message descriptor's <code>MsgId</code> field. A value must be specified if <code>CorrelationStyle</code> is set to <code>none</code> .
CorrelationId	Specifies the value for the MQ message descriptor's <code>CorrelId</code> field. A value must be specified if <code>CorrelationStyle</code> is set to <code>none</code> .
ApplicationData	Specifies any application-specific information that needs to be set in the message header.
AccountingToken	Specifies the value for the MQ message descriptor's <code>AccountingToken</code> field.
ApplicationOriginData	Specifies the value for the MQ message descriptor's <code>ApplOriginData</code> field.
PropagateTransactions	Specifies if local MQ transactions should be included in flowed transactions. Default is <code>true</code> .

Attribute Details

Server_Client

Description

The `server_client` attribute specifies which shared libraries to load on systems with a full WebSphere MQ installation.

Parameters

[Table 9](#) describes the settings for this attribute for each type of WebSphere MQ installation.

Table 9: *Server_Client Settings for the MQ Transport*

MQ Installation	Server_Client Setting	Behavior
Full		The server shared library (<code>libmqm</code>) is loaded and the application will use queues hosted on the local machine.
Full	<code>server</code>	The server shared library (<code>libmqm</code>) is loaded and the application will use queues hosted on the local machine.
Full	<code>client</code>	The client shared library (<code>libmqic</code>) is loaded and the application will use queues hosted on a remote machine.
Client		The application will attempt to load the server shared library (<code>libmqm</code>) before loading the client shared library (<code>libmqic</code>). The application accesses queues hosted on a remote machine.
Client	<code>server</code>	The application will fail because it cannot load the server shared libraries.
Client	<code>client</code>	The client shared library (<code>libmqic</code>) is loaded and the application accesses queues hosted on a remote machine.

AliasQueueName

Description

The `AliasQueueName` attribute specifies the local name of the reply queue when the service's queue manager is running a different host from the client. Using this attribute ensures that the server will put the replies on the proper queue. Otherwise, the server will receive a request message with the `ReplyToQ` field set to a queue that is managed by a queue manager on a remote host and will be unable to send the reply.

Effect of AliasQueueName


When you specify a value for the `AliasQueueName` attribute in an `mq:client` element, you alter how Artix populates the request's `ReplyToQ` field and `ReplyToQMGr` field. Typically, Artix populates the reply queue information in the request's message descriptor with the values specified in `ReplyQueueManager` and `ReplyQueueName`. Setting `AliasQueueName` causes Artix to leave `ReplytoQMGr` empty and to set `ReplyToQ` to the value of `AliasQueueName`. When the `ReplyToQMGr` field of the message descriptor is left empty, the sending queue manager inspects the queue named in the `ReplyToQ` field to determine who its queue manager is and uses that value for `ReplyToQMGr`. The server puts the message on the remote queue that is configured as a proxy for the client's local reply queue.

Examples

If you had a system defined similar to that shown in [Figure 1](#), you would need to use the `AliasQueueName` attribute setting when configuring your WebSphere MQ client. In this set up the client is running on a host with a local queue manager `QMGrA`. `QMGrA` has two queues configured. `RqA` is a remote queue that is a proxy for `RqB` and `RplyA` is a local queue. The server is running on a different machine whose local queue manager is `QMGrB`. `QMGrB` also has two queues. `RqB` is a local queue and `RplyB` is a remote queue that is a proxy for

RplyA. The client places its request on RqA and expects replies to arrive on RplyA.

Figure 1: MQ Remote Queues

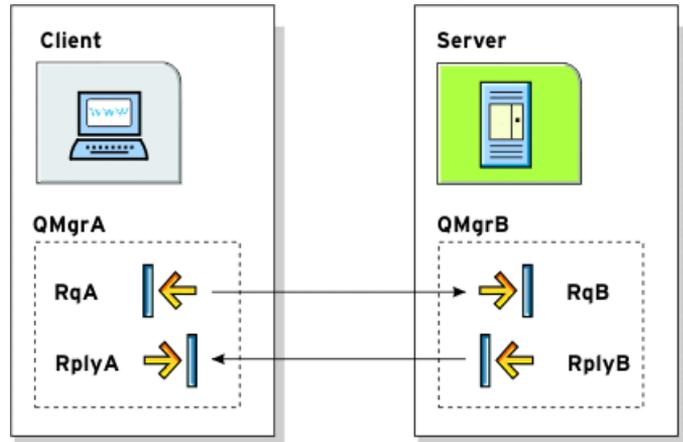

The Artix WebSphere MQ port definitions for the client and server for this deployment are shown in [Example 44](#). `AliasQueueName` is set to `RplyB` because that is the remote queue proxying for the reply queue in server's local queue manager. `ReplyQueueManager` and `ReplyQueueName` are set to the client's local queue manager so that it knows where to listen for responses. In this example, the server's `ReplyQueueManager` and `ReplyQueueName` do not need to be set because you are assured that the client is populating the request's message descriptor with the needed information for the server to determine where replies are sent.

Example 44: Setting Up WebSphere MQ Ports for Intercommunication

```
<mq:client QueueManager="QMgrA" QueueName="RqA"
  ReplyQueueManager="QMgrA" ReplyQueueName="RplyA"
  AliasQueueName="RplyB"
  Format="string" Convert="true"/>
<mq:server QueueManager="QMgrB" QueueName="RqB"
  Format="String" Convert="true"/>
```

UsageStyle

Description

The `UsageStyle` specifies if a message can be queued without expecting a response. The default value is `peer`.

Options

The valid settings for `UsageStyle` are described in [Table 10](#).

Table 10: *UsageStyle Settings*

Attribute Setting	Description
<code>peer</code>	Specifies that messages can be queued without expecting any response. This is the default.
<code>requester</code>	Specifies that the message sender expects a response message.
<code>responder</code>	Specifies that the response message must contain enough information to facilitate correlation of the response with the original message.

Examples

In [Example 45](#), the WebSphere MQ client wants a response from the server and needs to be able to associate the response with the request that generated it. Setting the `UsageStyle` to `responder` ensures that the server's response will properly populate the response message descriptor's `CorrelID` field according to the defined correlation style. In this case, the correlation style is set to `correlationId`.

Example 45: *MQ Client with UsageStyle Set*

```
<mq:client QueueManager="postmaster" QueueName="eddie"
  ReplyQueueManager="postmaster" ReplyQueueName="fred"
  UsageStyle="responder"
  CorrelationStyle="correlationId"/>
```

CorrelationStyle

Description

The `CorrelationStyle` attribute specifies how WebSphere MQ matches both the message identifier and the correlation identifier to select a particular message to be retrieved from the queue (this is accomplished by setting the corresponding `MQMO_MATCH_MSG_ID` and `MQMO_MATCH_CORREL_ID` in the

Options

MatchOptions field in MQGMO to indicate that those fields should be used as selection criteria).

The valid correlation styles for an Artix WebSphere MQ port are messageId, correlationId, and messageId copy.

Note: When a value is specified for ConnectionName, you cannot use messageID copy as the correlation style.

Table 11 shows the actions of MQGET and MQPUT when receiving a message using a WSDL specified message ID and a WSDL specified correlation ID.

Table 11: MQGET and MQPUT Actions

Artix Port Setting	Action for MQGET	Action for MQPUT
messageId	Set the CorrelId of the message descriptor to MessageID.	Copy MessageID onto the message descriptor's CorrelId.
correlationId	Set CorrelId of the message descriptor to CorrelationID.	Copy CorrelationID onto message descriptor's CorrelId.
messageId copy	Set MsgId of the message descriptor to messageID.	Copy MessageID onto message descriptor's MsgId.

AccessMode

Description

The AccessMode attribute controls the action of MQOPEN in the Artix WebSphere MQ transport.

Options

Table 12 describes the correlation between the Artix attribute settings and the MQOPEN settings.

Table 12: *Artix WebSphere MQ Access Modes*

Attribute Setting	Description
peek	Equivalent to MQOO_BROWSE. peek opens a queue to browse messages. This setting is not valid for remote queues.
send	Equivalent to MQOO_OUTPUT. send opens a queue to put messages into. The queue is opened for use with subsequent MQPUT calls.
receive (default)	Equivalent to MQOO_INPUT_AS_Q_DEF. receive opens a queue to get messages using a queue-defined default. The default value depends on the DefInputOpenOption queue attribute (MQOO_INPUT_EXCLUSIVE or MQOO_INPUT_SHARED).
receive exclusive	Equivalent to MQOO_INPUT_EXCLUSIVE. receive exclusive opens a queue to get messages with exclusive access. The queue is opened for use with subsequent MQGET calls. The call fails with reason code MQRC_OBJECT_IN_USE if the queue is currently open (by this or another application) for input of any type.
receive shared	Equivalent to MQOO_INPUT_SHARED. receive shared opens queue to get messages with shared access. The queue is opened for use with subsequent MQGET calls. The call can succeed if the queue is currently open by this or another application with MQOO_INPUT_SHARED.

MessagePriority

Description

The MessagePriority attribute specifies the value for the MQ message descriptor's Priority field. Its value must be greater than or equal to zero; zero is the lowest priority. Special values for MessagePriority include highest (9), high (7), medium (5), low (3) and lowest (0). The default is normal.

Delivery

Description

The `Delivery` attribute specifies the value of the MQ message descriptor's `Persistence` field.

Options

[Table 13](#) describes the settings for `Delivery`.

Table 13: *Delivery Attribute Settings*

Artix	WebSphere MQ
<code>persistent</code>	<code>MQPER_PERSISTENT</code>
<code>not persistent (Default)</code>	<code>MQPER_NOT_PERSISTENT</code>

To support transactional messaging, you must make the messages `persistent`.

Transactional

Description

The `Transactional` controls how messages participate in transactions and what role WebSphere MQ plays in the transactions.

Options

The values of the `Transactional` attribute are explained in [Table 14](#).

Table 14: *Transactional Attribute Settings*

Attribute Setting	Description
<code>none (Default)</code>	The messages are not part of a transaction. No rollback actions will be taken if errors occur.
<code>internal</code>	The messages are part of a transaction with WebSphere MQ serving as the transaction manager.
<code>xa</code>	The messages are part of a flowed transaction with WebSphere MQ serving as an enlisted resource manager.

Reliable MQ messages

When the `transactional` attribute to `internal` for an Artix service, the following happens during request processing:

1. When a request is placed on the service's request queue, MQ begins a transaction.
2. The service processes the request.
3. Control is returned to the server transport layer.
4. If no reply is required, the local transaction is committed and the request is permanently discarded.
5. If a reply message is required, the local transaction is committed and the request is permanently discarded only after the reply is successfully placed on the reply queue.
6. If an error is encountered while the request is being processed, the local transaction is rolled back and the request is placed back onto the service's request queue.

Examples

[Example 46](#) shows the settings for a WebSphere MQ server port whose requests will be part of transactions managed by WebSphere MQ. Note that the `Delivery` attribute must be set to `persistent` when using transactions.

Example 46: MQ Client Setup to use Transactions

```
<mq:server QueueManager="herman" QueueName="eddie"
  ReplyQueueManager="gomez" ReplyQueueName="lurch"
  UsageStyle="responder" Delivery="persistent"
  CorrelationStyle="correlationId"
  Transactional="internal"/>
```

ReportOption**Description**

The `ReportOption` attribute is mapped to the MQ message descriptor's `Report` field. It enables the application sending the original message to specify which report messages are required, whether the application message data is to be included in them, and how the message and correlation identifiers in the report or reply message are to be set. Artix only allows you to specify one `ReportOption` per Artix port. Setting more than one will result in unpredictable behavior.

Options

The values of this attribute are explained in [Table 15](#).

Table 15: *ReportOption Attribute Settings*

Attribute Setting	Description
none (Default)	Corresponds to <code>MQRO_NONE</code> . <code>none</code> specifies that no reports are required. You should never specifically set <code>ReportOption</code> to <code>none</code> ; it will create validation errors in the contract.
coa	Corresponds to <code>MQRO_COA</code> . <code>coa</code> specifies that confirm-on-arrival reports are required. This type of report is generated by the queue manager that owns the destination queue, when the message is placed on the destination queue.
cod	Corresponds to <code>MQRO_COD</code> . <code>cod</code> specifies that confirm-on-delivery reports are required. This type of report is generated by the queue manager when an application retrieves the message from the destination queue in a way that causes the message to be deleted from the queue.
exception	Corresponds to <code>MQRO_EXCEPTION</code> . <code>exception</code> specifies that exception reports are required. This type of report can be generated by a message channel agent when a message is sent to another queue manager and the message cannot be delivered to the specified destination queue. For example, the destination queue or an intermediate transmission queue might be full, or the message might be too big for the queue.
expiration	Corresponds to <code>MQRO_EXPIRATION</code> . <code>expiration</code> specifies that expiration reports are required. This type of report is generated by the queue manager if the message is discarded prior to delivery to an application because its expiration time has passed.

Table 15: *ReportOption Attribute Settings (Continued)*

Attribute Setting	Description
discard	Corresponds to MQRO_DISCARD_MSG. <code>discard</code> indicates that the message should be discarded if it cannot be delivered to the destination queue. An exception report message is generated if one was requested by the sender

Format

Description

The `Format` attribute is mapped to the MQ message descriptor's `Format` field. It specifies an optional format name to indicate to the receiver the nature of the data in the message.

Options

The value may contain any character in the queue manager's character set, but it is recommended that the name be restricted to the following:

- Uppercase A through Z
- Numeric digits 0 through 9

In addition, the `FormatType` attribute can take the special values `none`, `string`, `event`, `programmable command`, and `unicode`. These settings are described in [Table 16](#).

Table 16: *FormatType Attribute Settings*

Attribute Setting	Description
<code>none</code> (Default)	Corresponds to MQFMT_NONE. No format name is specified.
<code>string</code>	Corresponds to MQFMT_STRING. <code>string</code> specifies that the message consists entirely of character data. The message data may be either single-byte characters or double-byte characters.
<code>unicode</code>	Corresponds to MQFMT_STRING. <code>unicode</code> specifies that the message consists entirely of Unicode characters. (Unicode is not supported in Artix at this time.)

Table 16: *FormatType Attribute Settings (Continued)*

Attribute Setting	Description
event	Corresponds to MQFMT_EVENT. event specifies that the message reports the occurrence of an WebSphere MQ event. Event messages have the same structure as programmable commands.
programmable command	Corresponds to MQFMT_PCF. programmable command specifies that the messages are user-defined messages that conform to the structure of a programmable command format (PCF) message. For more information, consult the IBM Programmable Command Formats and Administration Interfaces documentation at http://publibfp.boulder.ibm.com/epubs/html/csqzac03/csqzac030d.htm#Header_12 .

When you are interoperating with WebSphere MQ applications hosted on a mainframe and the data needs to be converted into the systems native data format, you should set `Format` to `string`. Not doing so will result in the mainframe receiving corrupted data.

JMS Port

JMS is a powerful messaging system used by Java applications.

Namespace

The WSDL extensions used to describe JMS transport details are defined in the namespace `http://celtix.objectweb.org/transport/jms`. If you are going to use a JMS port you need to include the following in the `definitions` tag of your contract:

```
xmlns:jms="http://celtix.objectweb.org/transport/jms"
```

jms:address

Synopsis

```
<jms:address destinationStyle="..."
             jndiConnectionFactoryName="..."
             jndiDestinationName="..."
             jndiReplyDestinationName="..."
             connectionUserName="..." connectionPassword="...">
  <jms:JMSNamingProperty ... />
  ...
</jms:address>
```

Description

The `jms:address` element specifies the information needed to connect to a JMS system.

Attributes

The `jms:address` element has the following attributes:

<code>destinationStyle</code>	Specifies if the JMS destination is a JMS queue or a JMS topic.
<code>jndiConnectionFactoryName</code>	Specifies the JNDI name bound to the JMS connection factory to use when connecting to the JMS destination.
<code>jndiDestinationName</code>	Specifies the JNDI name bound to the JMS destination to which Artix connects.
<code>jndiReplyDestinationName</code>	Specifies the JNDI name bound to the JMS destinations where replies are sent. This attribute allows you to use a user defined destination for replies.
<code>connectionUserName</code>	Specifies the username to use when connecting to a JMS broker.
<code>connectionPassword</code>	Specifies the password to use when connecting to a JMS broker.

jms:JMSNamingProperty**Synopsis**

```
<jms:JMSNamingProperty name="..." value="..." />
```

Description

The `jms:JMSNamingProperty` element is a child of the `jms:address` element. It is used to provide the values used to populate the properties object used when connecting to a JNDI provider.

Attributes

The `jms:JMSNamingProperty` element has the following attributes:

<code>name</code>	Specifies the name of the JNDI property to set.
<code>value</code>	Specifies the value for the specified property.

JNDI property names

The following is a list of common JNDI properties that can be set:

- `java.naming.factory.initial`
- `java.naming.provider.url`
- `java.naming.factory.object`
- `java.naming.factory.state`
- `java.naming.factory.url.pkgs`
- `java.naming.dns.url`
- `java.naming.authoritative`

- `java.naming.batchsize`
- `java.naming.referral`
- `java.naming.security.protocol`
- `java.naming.security.authentication`
- `java.naming.security.principal`
- `java.naming.security.credentials`
- `java.naming.language`
- `java.naming.applet`

For more details on what information to use in these attributes, check your JNDI provider's documentation and consult the Java API reference material.

jms:client

Synopsis

```
<jms:client messageType="..." />
```

Description

The `jms:client` element is a child of the WSDL `port` element. It is used to specify the types of messages being used by a JMS client endpoint and the timeout value for a JMS client endpoint.

Attributes

The `jms:client` element has the following attributes:

<code>messageType</code>	Specifies how the message data will be packaged as a JMS message. <code>text</code> specifies that the data will be packaged as a <code>TextMessage</code> . <code>binary</code> specifies that the data will be packaged as an <code>ObjectMessage</code> .
--------------------------	--

jms:server

Synopsis

```
<jms:server useMessageIDAsCorrelationID="..."
    durableSubscriberName="..."
    messageSelector="..." transactional="..." />
```

Description

The `jms:server` element is a child of the WSDL `port` element. It specifies settings used to configure the behavior of a JMS service endpoint.

Attributes

The `javax.jms:server` element has the following attributes:

<code>useMessageIDAsCorrelationID</code>	Specifies whether JMS will use the message ID to correlate messages. The default is <code>false</code> .
<code>durableSubscriberName</code>	Specifies the name used to register a durable subscription.
<code>messageSelector</code>	Specifies the string value of a message selector to use.
<code>transactional</code>	Specifies whether the local JMS broker will create transactions around message processing. The default is <code>false</code> .

Tuxedo Port

Artix can connect to applications that use BEA's Tuxedo as their messaging backbone.

Namespace

The extensions used to describe a Tuxedo port are defined in the namespace `http://schemas.iona.com/transport/tuxedo`. When a Tuxedo endpoint is defined in a contract, the contract will need the following namespace declaration in the contract's `definition` element:

```
xmlns:tuxedo="http://schemas.iona.com/transport/tuxedo"
```

tuxedo:server

Synopsis

```
<tuxedo:server>
  <tuxedo:service ...>
    ...
  </tuxedo:service>
</tuxedo:server>
```

Description

The `tuxedo:server` element is a child of a WSDL `port` element. It contains the definition of a Tuxedo endpoint.

tuxedo:service

Synopsis

```
<tuxedo:service name="...">
```

```

    <tuxedo:input .../>
    ...
</tuxedo:service>

```

Description

The `tuxedo:service` element is the child of a `tuxedo:server` element. It specifies the bulletin board name used to post and receive messages. It has a number of `tuxedo:input` child elements that provide a map to the operations from which messages are routed.

Attributes

The `tuxedo:service` element has a single required attribute called `name`. The `name` attribute specifies the bulletin board name for the service.

tuxedo:input**Synopsis**

```
<tuxedo:input operation="..." />
```

Description

The `tuxedo:input` element specifies which of the operations bound to the port being defined are handled by the Tuxedo service.

Attributes

The `tuxedo:input` element has a single required attribute called `operation`. The `operation` attribute specifies the WSDL operation that is handled by the Tuxedo service. The value must correspond to the value of the `name` attribute of the appropriate WSDL `operation` element.

Tibco/Rendezvous Port

Artix provides a number of attributes to define a TIB/RV service.

In this chapter

This chapter discusses the following topics:

Artix Extension Elements	page 132
Attribute Details	page 136

Artix Extension Elements

Namespace

The extensions used to describe a Tibco/Rendezvous endpoint are defined in the namespace `http://schemas.iona.com/transport/tibrv`. When a Tibco endpoint is defined in a contract, the contract will need the following namespace declaration in the contract's `definition` element:

```
xmlns:tibrv="http://schemas.iona.com/transport/tibrv"
```

tibrv:port

Synopsis

```
<tibrv:port serverSubject="..." clientSubject="..."
  bindingType="..." callbackLevel="..."
  responseDispatchTimeout="..." transportService="..."
  transportNetwork="..." transportDaemon="..."
  transportBatchMode="..." cmSupport="..."
  cmTransportServerName="..." cmTransportClientName="..."
  cmTransportRequestOld="..." cmTransportLedgerName="..."
  cmTransportSyncLedger="..."cmTransportRelayAgent="..."
  cmTransportDefaultTimeLimit="..."
  cmListenerCancelAgreement="..."
  cmQueueTransportServerName="..."
  cmQueueTransportWorkerWeight="..."
  cmQueueTransportWorkerTasks="..."
  cmQueueTransportSchedulerWeight="..."
  cmQueueTransportSchedulerHeartbeat="..."
  cmQueueTransportSchedulerActivation="..."
  cmQueueTransportCompleteTime="..." />
```

Description

The `tibrv:port` element is the child of a WSDL `port` element. It specifies the properties used to configure an endpoint that use Tibco/Rendezvous as its messaging backbone. The element's attributes specify the information needed

to configure the transport layer. The `serverSubject` attribute is required to be set and its value must match on both the server side and the client side.

Attributes

The `tibrv:port` element has the following attributes:

<code>serverSubject</code>	Specifies the subject to which the server listens. This parameter must be the same between client and server.
<code>clientSubject</code>	Specifies the prefix to the subject that the client listens to. The default is to use a uniquely generated name.
<code>bindingType</code>	Specifies the message binding type.
<code>callbackLevel</code>	Specifies the server-side callback level when TIB/RV system advisory messages are received.
<code>responseDispatchTimeout</code>	Specifies the client-side response timeout.
<code>transportService</code>	Specifies the UDP service name or port for <code>TibrvNetTransport</code> .
<code>transportNetwork</code>	Specifies the binding network addresses for <code>TibrvNetTransport</code> .
<code>transportDaemon</code>	Specifies the TCP daemon port for <code>TibrvNetTransport</code> . The default is to use 7500 for the <code>TRDP</code> daemon, or 7550 for the <code>PGM</code> daemon.
<code>transportBatchMode</code>	Specifies if the TIB/RV transport uses batch mode to send messages. The default is <code>false</code> ; The endpoint will send messages as soon as they are ready.
<code>cmSupport</code>	Specifies if Certified Message Delivery support is enabled. The default is <code>false</code> ; CM support is disabled.
<code>cmTransportServerName</code>	Specifies the server's <code>TibrvCmTransport</code> correspondent name.

<code>cmTransportClientName</code>	Specifies the client TibrvCmTransport correspondent name. The default is to use a transient correspondent name.
<code>cmTransportRequestOld</code>	Specifies if the endpoint can request old messages on start-up. The default is <code>false</code> ; the endpoint cannot request old messages on start-up.
<code>cmTransportLedgerName</code>	Specifies the TibrvCmTransport ledger file. The default is to use an in-process ledger that is stored in memory.
<code>cmTransportSyncLedger</code>	Specifies if the endpoint uses a synchronous ledger. The default is <code>false</code> ; the endpoint does not use a synchronous ledger.
<code>cmTransportRelayAgent</code>	Specifies the endpoint's TibrvCmTransport relay agent. If this attribute is not set, the endpoint does not use a relay agent.
<code>cmTransportDefaultTimeLimit</code>	Specifies the default time limit for a Certified Message to be delivered. The default is no time limit.
<code>cmListenerCancelAgreements</code>	Specifies if Certified Message agreements are canceled when the endpoint disconnects. The default is <code>false</code> ; agreements remain in place after disconnecting.
<code>cmQueueTransportServerName</code>	Specifies the server's TibrvCmQueueTransport correspondent name.
<code>cmQueueTransportWorkerWeight</code>	Specifies the endpoint's TibrvCmQueueTransport <code>worker</code> weight. The default is <code>TIBRVCM_DEFAULT_WORKER_WEIGHT</code> .

<code>cmQueueTransportWorkerTasks</code>	Specifies the value of the endpoint's <code>TibrvCmQueueTransport worker tasks</code> parameter. The default is <code>TIBRVCM_DEFAULT_WORKER_TASKS</code> .
<code>cmQueueTransportSchedulerWeight</code>	Specifies the value of the <code>TibrvCmQueueTransport scheduler weight</code> parameter. The default is <code>TIBRVCM_DEFAULT_SCHEDULER_WEIGHT</code> .
<code>cmQueueTransportSchedulerHeartbeat</code>	Specifies the value of the <code>TibrvCmQueueTransport scheduler heartbeat</code> parameter. The default is <code>TIBRVCM_DEFAULT_SCHEDULER_HB</code> .
<code>cmQueueTransportSchedulerActivation</code>	Specifies the value of the <code>TibrvCmQueueTransport scheduler activation</code> parameter. The default is <code>TIBRVCM_DEFAULT_SCHEDULER_ACTIVE</code> .
<code>cmQueueTransportCompleteTime</code>	Specifies the value of the <code>TibrvCmQueueTransport complete time</code> parameter. The default is 0.

Attribute Details

bindingType

Description

The `bindingType` attribute specifies the message binding type.

Options

Artix TIB/RV ports support three types of payload formats as described in [Table 17](#).

Table 17: *TIB/RV Supported Payload formats*

Value	Payload Formats	TIB/RV Message Implications
msg	TibrvMsg	The message data is encapsulated in a TibrvMsg described by the binding section of the service's contract.
xml	SOAP, tagged data	The message data is encapsulated in a field of <code>TIBRVMSG_XML</code> with a null name and an ID of 0.
opaque	fixed record length data, variable record length data	The message data is encapsulated in a field of <code>TIBRVMSG_OPAQUE</code> with a null name and an ID of 0.

callbackLevel

Description

The `callbackLevel` attribute specifies the server-side callback level when TIB/RV system advisory messages are received.

Options

It has three settings:

- INFO
- WARN
- ERROR (default)

responseDispatchTimeout

Description

The `responseDispatchTimeout` attribute specifies the client-side response receive dispatch timeout. The default is `TIBRV_WAIT_FOREVER`.

Note: If only the `TibrvNetTransport` is used and there is no server return response for a request, then not setting a timeout value causes the client to block forever.

transportService

Description

The `transportService` attribute specifies the UDP service name or port for `TibrvNetTransport`. The default is `rendezvous`. If no corresponding entry exists in `/etc/services`, 7500 for the `TRDP` daemon, or 7550 for the `PGM` daemon will be used. This parameter must be the same for both client and server.

transportNetwork

Description

The `transportNetwork` attribute specifies the binding network addresses for `TibrvNetTransport`. The default is to use the interface IP address of the host for the `TRDP` daemon, 224.0.1.78 for the `PGM` daemon. This parameter must be interoperable between the client and the server.

cmTransportServerName

Description

The `cmTransportServerName` attribute specifies the server's `TibrvCmTransport` correspondent name. The default is to use a transient correspondent name. This parameter must be the same for both client and server if the client also uses Certified Message Delivery.

cmQueueTransportServerName

Description

The `cmQueueTransportServerName` attribute specifies the server's `TibrvCmQueueTransport` correspondent name. If this property is set, the server

listener joins to the distributed queue of the specified name. This parameter must be the same among the server queue members.

File Transfer Protocol Port

Artix can use an FTP server as a middle-tier message broker.

Namespace

The extensions used to describe a File Transfer Protocol (FTP) port are defined in the namespace `http://schemas.iona.com/transport/ftp`. When an FTP endpoint is defined in a contract, the contract will need the following namespace declaration in the contract's `definition` element:

```
xmlns:ftp="http://schemas.iona.com/transport/ftp"
```

ftp:port

Synopsis

```
<ftp:port host="..." port="..." requestLocation="..."
  replyLocation="..." connectMode="..." scanInterval="...">
  <ftp:properties>
    ...
  </ftp:properties>
</ftp:port>
```

Description

The `ftp:port` element is a child of a WSDL `port` element. It defines the connection details for an FTP endpoint. It may contain an [ftp:properties](#) element.

Attributes

The `ftp:port` element has the following attributes:

<code>host</code>	Specifies the domain name or IP address of the machine hosting the FTPD used by the endpoint.
<code>port</code>	Specifies the port number on which the endpoint will contact the FTPD.
<code>requestLocation</code>	Specifies the path on the FTPD host the endpoint will use for requests. The default is <code>/</code> .
<code>replyLocation</code>	Specifies the path on the FTPD host the endpoint will use for replies. The default is <code>/</code> .
<code>connectMode</code>	Specifies the connection mode used to connect to the FTPD. Valid values are <code>passive</code> and <code>active</code> . The default is <code>passive</code> .
<code>scanInterval</code>	Specifies the interval, in seconds, at which the request and reply directories are scanned for updates. The default is <code>5</code> .

ftp:properties**Synopsis**

```
<ftp:properties>
  <ftp:property ... />
  ...
</ftp:property>
```

Description

The `ftp:properties` element defines a number of file naming properties used by the endpoint for storing requests and replies. It contains one or more [ftp:property](#) elements.

ftp:property**Synopsis**

```
<ftp:property name="..." value="..." />
```

Description

The `ftp:property` element defines specific file naming properties to use when reading and writing messages on the FTPD host. The properties are defined by the implementation used for the naming scheme classes. Artix provides a default implementation. However, a custom naming scheme implementation may have different properties.

Attributes

The `ftp:property` element has the following attributes:

<code>name</code>	Specifies the name of the property to set.
<code>value</code>	Specifies the value of the property.

Default Naming Properties

The default naming implementation provided with Artix supports the following properties:

<code>staticFilemanes</code>	Determines if the endpoint uses a static, non-unique, naming scheme for its files. Valid values are <code>true</code> and <code>false</code> . The default is <code>true</code> .
<code>requestFilenamePrefix</code>	Specifies the prefix to use for file names when <code>staticFilemanes</code> is set to <code>false</code> .

Part III

Other Extensions

In this part

This part contains the following chapters:

Routing	page 145
Security	page 155
Codeset Conversion	page 159

Routing

Artix provides a number of WSDL extensions for defining how messages are routed between services.

Namespace

The Artix routing elements are defined in the `http://schemas.iona.com/routing` namespace. When describing routes in an Artix contract your contract's `definitions` element must have the following entry:

```
xmlns:routing="http://schemas.iona.com/routing"
```

routing:expression

Synopsis

```
<routing:expression name="..." evaluator="..."  
  ...  
</routing:expression>
```

Description

The `routing:expression` element is a child of the WSDL `definitions` element. It specifies an XPATH expression that evaluates messages for content-based routing.

Attributes

The `routing:expression` requires the following two attributes:

<code>name</code>	Specifies a string that is used to refer to the expression when defining routes.
-------------------	--

evaluator	Specifies the name of the grammar used in the expression. Currently the only valid value is <code>xpath</code> .
-----------	--

routing:route

Synopsis

```
<routing:route name="..." multiRoute="...">
  ...
</routing:route>
```

Description

The `routing:route` element is the root element of each route described in a contract.

Attributes

The `routing:route` element takes the following attributes:

name	Specifies a unique identifier for the route. This attribute is required.
multiRoute	An optional attribute that specifies how messages are sent to the listed destinations. Values are <code>fanout</code> , <code>failover</code> , or <code>loadBalance</code> . Default is to route messages to a single destination.

Options

Standard routes define a single source/destination pair. When the `multiRoute` attribute is specified, your route description will contain more than one destination.

Setting the `multiRoute` attribute has the following effects:

- `fanout` instructs Artix to send messages from the source to all the listed destinations.
 - `failover` instructs Artix to move through the list of destinations until it can successfully send the message.
 - `loadBalance` instructs Artix to use a round-robin algorithm to spread messages across all of the listed destinations.
-

routing:source

Synopsis

```
<routing:source service="..." port="..." />
```

Description

The `routing:source` element is a child of a `routing:route` element. It specifies the port from which the route will redirect messages. A route can have several

source elements as long as they all meet the compatibility rules for port-based routing.

Attributes

The `routing:source` element requires two attributes:

<code>service</code>	Specifies the WSDL <code>service</code> element in which the source port is defined.
<code>port</code>	Specifies the name of the WSDL <code>port</code> element from which messages are being received. The router will create a proxy to listen for messages on this port.

routing:query

Synopsis

```
<routing:query expression="...">
  <routing:destination id="..." ... />
  ...
</routing:query>
```

Description

The `routing:query` element is a child of a `routing:route` element. It specifies the destinations for a content-based route. The child `routing:destination` elements must use the `id` attribute to specify the value used to select the destination.

Attributes

The `routing:query` element has one attribute:

<code>expression</code>	Specifies the value of the <code>name</code> attribute from the <code>routing:expression</code> element defining the XPath expression used to select the destination of the message. The query selects the destination with the <code>id</code> value that matches the result of applying the expression to the message content.
-------------------------	--

routing:destination

Synopsis

```
<routing:destination id="..." service="..."
  port="..." route="..." />
```

Description

The `routing:destination` element is a child of a `routing:route` element. It specifies the port to which the source messages are directed. The destination must be compatible with all of the source elements.

Attributes

The `routing:destination` element has the following attributes:

<code>id</code>	Specifies the value of the content-based routing query that triggers the destination. This attribute is required when the element is the child of a <code>routing:query</code> element and ignored otherwise.
<code>service</code>	Specifies the WSDL <code>service</code> element in which the destination port is defined.
<code>port</code>	Specifies the name of the port WSDL element to which messages are routed.
<code>route</code>	Specifies a linked route to use for selecting the ultimate destination. When this attribute is used, you should not use the <code>service</code> attribute or the <code>port</code> attribute.

routing:transportAttribute**Synopsis**

```
<routing:transportAttribute>
  ...
</routing:transportAttribute>
```

Description

The `routing:transportAttribute` element is a child of a `routing:route` element. It defines routing rules based on the transport attributes set in a message's header when using HTTP, CORBA, or WebSphere MQ. The criteria for determining if a message meets the transport attribute rule are specified using the following child elements:

- `routing:equals`
- `routing:greater`
- `routing:less`
- `routing:startswith`
- `routing:endswith`
- `routing:contains`
- `routing:empty`
- `routing:nonempty`

A message passes the rule if it meets each criterion specified by the child elements.

Transport attribute rules are defined after all of the operation-based routing rules and before any destinations are listed.

Examples

[Example 47](#) shows a route using transport attribute rules based on HTTP header attributes. Only messages sent to the server whose `UserName` is equal to `JohnQ` will be passed through to the destination port.

Example 47: Transport Attribute Rules

```
<routing:route name="httpTransportRoute">
  <routing:source service="tns:httpService"
    port="tns:httpPort"/>
  <routing:transportAttributes>
    <routing:equals
      contextName="http-conf:HTTPServerIncomingContexts"
      contextAttributeName="UserName"
      value="JohnQ"/>
    </routing:transportAttributes>
  <routing:destination service="tns:httpDest"
    port="tns:httpDestPort"/>
</routing:route>
```

routing:equals

Synopsis

```
<routing:equals contextName="..."
  contextAttributeName="..."
  value="..."
  ignorecase="..." />
```

Description

The `routing:equals` element is a child of a [routing:transportAttribute](#) element. It defines a rule that is triggered when the specified attribute equals the value given. It applies to string or numeric attributes.

Attributes

The `routing:equals` element has the following attributes:

<code>contextName</code>	Specifies the QName of the context in which the desired transport attributes are stored.
<code>contextAttributeName</code>	Specifies the QName of the transport attribute the rule evaluates.
<code>value</code>	Specifies the value against which the specified attribute is evaluated.
<code>ignorecase</code>	Specifies whether the case of characters in a string are ignored. The default is <code>no</code> ; case is considered when evaluating string data.

routing:greater

Synopsis

```
<routing:greater contextName="..."
                 contextAttributeName="..."
                 value="..." />
```

Description

The `routing:greater` element is a child of a [routing:transportAttribute](#) element. It defines a rule that is triggered when the value of the specified attribute is greater than the value given. It applies to numeric attributes.

Attributes

The `routing:greater` element has the following attributes:

<code>contextName</code>	Specifies the QName of the context in which the desired transport attributes are stored.
<code>contextAttributeName</code>	Specifies the QName of the transport attribute the rule evaluates.
<code>value</code>	Specifies the value against which the specified attribute is evaluated.

routing:less

Synopsis

```
<routing:less contextName="..."
              contextAttributeName="..."
              value="..." />
```

Description

The `routing:less` element is a child of a [routing:transportAttribute](#) element. It defines a rule that is triggered when the value of the specified attribute is less than the value given. It applies to numeric attributes.

Attributes

The `routing:less` element has the following attributes:

<code>contextName</code>	Specifies the QName of the context in which the desired transport attributes are stored.
<code>contextAttributeName</code>	Specifies the QName of the transport attribute the rule evaluates.
<code>value</code>	Specifies the value against which the specified attribute is evaluated.

routing:startswith

Synopsis

```
<routing:startswith contextName="..."
                    contextAttributeName="..."
                    value="..."
                    ignorecase="..." />
```

Description

The `routing:startswith` element is a child of a [routing:transportAttribute](#) element. It applies to string attributes and tests whether the attribute starts with the specified value.

Attributes

The `routing:startswith` element has the following attributes:

<code>contextName</code>	Specifies the QName of the context in which the desired transport attributes are stored.
<code>contextAttributeName</code>	Specifies the QName of the transport attribute the rule evaluates.
<code>value</code>	Specifies the value against which the specified attribute is evaluated.
<code>ignorecase</code>	Specifies whether the case of characters in a string are ignored. The default is <code>no</code> ; case is considered when evaluating string data.

routing:endswith

Synopsis

```
<routing:endswith contextName="..."
                  contextAttributeName="..."
                  value="..."
                  ignorecase="..." />
```

Description

The `routing:endswith` element is a child of a [routing:transportAttribute](#) element. It applies to string attributes and tests whether the attribute ends with the specified value.

Attributes

The `routing:endswith` element has the following attributes:

<code>contextName</code>	Specifies the QName of the context in which the desired transport attributes are stored.
--------------------------	--

<code>contextAttributeName</code>	Specifies the QName of the transport attribute the rule evaluates.
<code>value</code>	Specifies the value against which the specified attribute is evaluated.
<code>ignorecase</code>	Specifies whether the case of characters in a string are ignored. The default is <code>no</code> ; case is considered when evaluating string data.

routing:contains

Synopsis

```
<routing:contains contextName="..."
                  contextAttributeName="..."
                  value="..."
                  ignorecase="..." />
```

Description

The `routing:contains` element is a child of a [routing:transportAttribute](#) element. It applies to string or list attributes. For strings, it tests whether the attribute contains the value. For lists, it tests whether the value is a member of the list.

Attributes

The `routing:contains` element has the following attributes:

<code>contextName</code>	Specifies the QName of the context in which the desired transport attributes are stored.
<code>contextAttributeName</code>	Specifies the QName of the transport attribute the rule evaluates.
<code>value</code>	Specifies the value against which the specified attribute is evaluated.
<code>ignorecase</code>	Specifies whether the case of characters in a string are ignored. The default is <code>no</code> ; case is considered when evaluating string data.

routing:empty

Synopsis

```
<routing:empty contextName="..."
               contextAttributeName="..." />
```

Description

The `routing:empty` element is a child of a [routing:transportAttribute](#) element. It applies to string or list attributes. For lists, it tests whether the list is empty. For strings, it tests for an empty string.

Attributes

The `routing:empty` element has the following attributes:

- `contextName` Specifies the QName of the context in which the desired transport attributes are stored.
- `contextAttributeName` Specifies the QName of the transport attribute the rule evaluates.

routing:nonempty

Synopsis

```
<routing:nonempty contextName="..."
                  contextAttributeName="..." />
```

Description

The `routing:nonempty` element is a child of a [routing:transportAttribute](#) element. It applies to string or list attributes. For lists, it passes if the list is not empty. For strings, it passes if the string is not empty.

Attributes

The `routing:nonempty` element has the following attributes:

- `contextName` Specifies the QName of the context in which the desired transport attributes are stored.
- `contextAttributeName` Specifies the QName of the transport attribute the rule evaluates.

Transport Attribute Context Names

The `contextName` attribute is specified using the QName of the context in which the attribute is defined. The contexts shipped with Artix are described in [Table 18](#).

Table 18: *Context QNames*

Context QName	Details
<code>http-conf:HTTPServerIncomingContexts</code>	Contains the attributes for HTTP messages being received by a server.

Table 18: *Context QName*

Context QName	Details
corba:corba_input_attributes	Contains the data stored in the CORBA principle
mq:MQConnectionAttributes	Contains the attributes used to connect to an MQ queue.
mq:MQIncomingMessageAttributes	Contains the attributes in the message header of an MQ message.
bus-security	Contains the attributes used by the IONA security service to secure your services.

Security

Artix uses a special WSDL extension element to specify security policies for endpoints.

Namespace

The elements Artix uses for specifying security policies are defined in the `http://schemas.iona.com/bus/security` namespace. When defining security policies in an Artix contract your contract's `definition` element must have the following entry:

```
xmlns:bus-security="http://schemas.iona.com/bus/security"
```

bus-security:security

Synopsis

```
<bus-security:security enableSecurity="..."
    is2AuthorizationActionRoleMapping="..."
    enableAuthorization="..."
    authenticationCacheSize="..."
    authenticationCacheTimeout ="..."
    securityType="..."
    securityLevel="..."
    authorizationRealm="..."
    defaultPassword="..." />
```

Description

The `bus-security:security` element is a child of a WSDL `port` element. It's attributes specify security policies for the endpoint.

Attributes

The `bus-security:security` element has the following attributes:

<code>enableSecurity</code>	Specifies if the service should load the ASP plug-in. Default is <code>false</code> .
<code>is2AuthorizationActionRoleMapping</code>	Specifies the URL of the action role mapping file the Artix security framework uses to authenticate requests for this endpoint.
<code>enableAuthorization</code>	Specifies if the endpoint should use the Artix security framework for authentication. Default is <code>false</code> .
<code>enableSSO</code>	Specifies if the service can use single-sign on (SSO). Default is <code>false</code> .
<code>authenticationCacheSize</code>	Specifies the maximum number of credentials stored in the authentication cache. A value of <code>-1</code> (the default) means unlimited size. A value of <code>0</code> disables the cache.
<code>authenticationCacheTimeout</code>	Specifies the time (in seconds) after which a credential is considered stale. A value of <code>-1</code> (the default) means an infinite time-out. A value of <code>0</code> disables the cache.
<code>securityLevel</code>	<p>Specifies the level from which security credentials are picked up.</p> <p>The following options are supported by the Artix security framework:</p> <ul style="list-style-type: none"> • <code>MESSAGE_LEVEL</code>—Get security information from the transport header. This is the default. • <code>REQUEST_LEVEL</code>—Get the security information from the message header.

<code>authenticationCacheSize</code>	Specifies the maximum number of credentials stored in the authentication cache. A value of <code>-1</code> (the default) means unlimited size. A value of <code>0</code> disables the cache.
<code>authenticationCacheTimeout</code>	Specifies the time (in seconds) after which a credential is considered stale. A value of <code>-1</code> (the default) means an infinite time-out. A value of <code>0</code> disables the cache.
<code>securityLevel</code>	<p>Specifies the level from which security credentials are picked up.</p> <p>The following options are supported by the Artix security framework:</p> <ul style="list-style-type: none">• <code>MESSAGE_LEVEL</code>—Get security information from the transport header. This is the default.• <code>REQUEST_LEVEL</code>—Get the security information from the message header.

See also

For more information about Artix security policies see [The Artix Security Guide](#).

Codeset Conversion

For transports that do not natively support codeset conversion Artix has the ability to perform codeset conversion.

Namespace

The elements Artix uses for defining codeset conversion rules are defined in the `http://schemas.iona.com/bus/i18n/context` namespace. When defining codeset conversion rules in an Artix contract your contract's `definition` element must have the following entry:

```
xmlns:i18n-context="http://schemas.iona.com/bus/i18n/context"
```

`i18n-context:client`

Synopsis

```
<i18n-context:client LocalCodeSet="..." OutboundCodeSet="..."  
    InboundCodeSet="..." />
```

Description

The `i18n-context:client` element is a child of a WSDL `port` element. It specifies codeset conversion rules for Artix endpoints that are acting as servers.

Attributes

The `i18n-context:client` element has the following attributes for defining how message codesets are converted:

<code>LocalCodeSet</code>	Specifies the client's native codeset. Default is the codeset specified by the local system's locale setting.
<code>OutboundCodeSet</code>	Specifies the codeset into which requests are converted. Default is the codeset specified in <code>LocalCodeSet</code> .
<code>InboundCodeSet</code>	Specifies the codeset into which replies are converted. Default is the codeset specified in <code>OutboundCodeSet</code> .

i18n-context:server**Synopsis**

```
<i18n-context:server LocalCodeSet="..." OutboundCodeSet="..."
    InboundCodeSet="..." />
```

Description

The `i18n-context:server` element is a child of a WSDL `port` element. It specifies codeset conversion rules for Artix endpoints that are acting as servers.

Attributes

The `i18n-context:server` element has the following attributes for defining how message codesets are converted:

<code>LocalCodeSet</code>	Specifies the server's native codeset. Default is the codeset specified by the local system's locale setting.
<code>OutboundCodeSet</code>	Specifies the codeset into which replies are converted. Default is the codeset specified in <code>InboundCodeSet</code> .
<code>InboundCodeSet</code>	Specifies the codeset into which requests are converted. Default is the codeset specified in <code>LocalCodeSet</code> .

Index

A

- adding a SOAP header 8
- arrays
 - mapping to a fixed binding 52
 - mapping to a tagged binding 59
 - mapping to a TibrvMsg 71
 - mapping to CORBA 27
- Artix contexts
 - using in a TibrvMsg 76
- Artix reference
 - mapping to CORBA 33
- attribute based routing 148

B

- bus-security:security 155
 - authenticationCacheSize attribute 156, 157
 - authenticationCacheTimeout attribute 156, 157
 - enableAuthorization attribute 156
 - enableSecurity attribute 156
 - enableSSO attribute 156
 - is2AuthorizationActionRoleMapping attribute 156
 - securityLevel attribute 156, 157

C

- choice complexType
 - mapping to a fixed binding 49
 - mapping to a tagged binding 61
- complex types
 - mapping to a TibrvMsg 74
 - mapping to CORBA 20
- corba:address 101
 - location attribute 101
- corba:alias 26
 - name attribute 26
 - repositoryID attribute 26
 - type attribute 26
- corba:anonsequence 30
 - bound attribute 30
 - elemtype attribute 30
 - name attribute 30
 - type attribute 30
- corba:array 27

- bound attribute 27
- elemtype attribute 27
- name attribute 27
- repositoryID attribute 27
- type attribute 27
- corba:binding 16
 - bases attribute 16
 - repositoryID attribute 16
- corba:case 25
 - label attribute 25
- corba:enumerator 22
- corba:exception 29
 - name attribute 29
 - repositoryID attribute 29
 - type attribute 29
- corba:fixed 22
 - digits attribute 23
 - name attribute 23
 - repositoryID attribute 23
 - scale attribute 23
 - type attribute 23
- corba:member 20
 - idltype attribute 20
 - name attribute 20
- corba:object
 - binding attribute 33
 - name attribute 34
 - repositoryID attribute 34
 - type attribute 34
- corba:operation 16
 - name attribute 17
- corba:param 17
 - idltype attribute 17
 - mode attribute 17
 - name attribute 17
- corba:policy 102
 - persistent attribute 102
 - poaname attribute 102
 - serviceid attribute 102
- corba:raises 18
 - exception attribute 18
- corba:return 17
 - idltype attribute 18

- name attribute 18
- corba:sequence 28
 - bound attribute 28
 - elemtype attribute 28
 - name attribute 28
 - repositoryID attribute 28
- corba:typeMapping 19
 - targetNamespace attribute 19
- corba:union 24
 - discriminator attribute 24
 - name attribute 24
 - repositoryID attribute 24
 - type attribute 24
- corba:unionbranch 24
 - default attribute 25
 - idltype attribute 24
 - name attribute 24

D

- defining a fixed message body 44
- defining a tagged message body 57
- defining a TibrvMsg 74
- durable subscriptions 128

E

- enumerations
 - mapping to a fixed binding 48
 - mapping to a tagged binding 58
 - mapping to CORBA 21
- exceptions
 - mapping to CORBA 18, 29
 - mapping to SOAP 9

F

- failover routing 146
- fanout routing 146
- fixed:binding 43
 - encoding attribute 44
 - justification attribute 43
 - padHexCode attribute 44
- fixed:body 44
 - encoding attribute 45
 - justification attribute 45
 - padHexCode attribute 45
- fixed:case 50
 - fixedValue attribute 51
 - name attribute 51
- fixed:choice 50

- discriminatorName attribute 50
 - name attribute 50
- fixed:enumeration 48
 - fixedValue attribute 49
 - value attribute 49
- fixed:field 45
 - bindingOnly attribute 46
 - fixedValue attribute 46
 - format attribute 46
 - name attribute 45
 - size attribute 46
- fixed:operation 44
 - discriminator attribute 44
- fixed:sequence 52
 - counterName attribute 53
 - name attribute 53
 - occurs attribute 53
- ftp:port 139
 - connectMode 140
 - host 140
 - port 140
 - replyLocation 140
 - requestLocation 140
 - scanInterval 140
- ftp:properties 140
- ftp:property 140
 - name 141
 - value 141

H

- http:address 84
 - location attribute 84
- http-conf:client 85
 - Accept attribute 91
 - AcceptEncoding attribute 93
 - AcceptLanguage attribute 92
 - Authorization attribute 91
 - AuthorizationType attribute 91
 - AutoRedirect attribute 86
 - BrowserType attribute 98
 - CacheControl attribute 95
 - cache-extension directive 96
 - max-age directive 95
 - max-stale directive 96
 - min-fresh directive 96
 - no-cache directive 95
 - no-store directive 95
 - no-transform directive 96
 - only-if-cached directive 96

- ClientCertificate attribute 87
- ClientCertificateChain attribute 87
- ClientPrivateKey attribute 88
- ClientPrivateKeyPassword attribute 88
- ConnectionAttempts attribute 87
- Connection attribute 95
- ContentType attribute 86
- Cookie attribute 87
- Host attribute 94
- Password attribute 86
- ProxyAuthorization attribute 99
- ProxyAuthorizationType attribute 99
- ProxyPassword attribute 87
- ProxyServer attribute 99
- ProxyUserName attribute 87
- ReceiveTimeout attribute 86
- Referer attribute 98
- SendTimeout attribute 86
- TrustedRootCertificate attribute 88
- UserName attribute 86
- UseSecureSockets attribute 100
- http-conf:server 88
 - CacheControl attribute 95
 - cache-extension directive 98
 - max-age directive 97
 - must-revalidate directive 97
 - no-cache directive 97
 - no-store directive 97
 - no-transform directive 97
 - private directive 97
 - proxy-revalidate directive 97
 - public directive 97
 - s-maxage directive 98
 - ContentEncoding attribute 94
 - ContentLocation attribute 89
 - ContentType attribute 89
 - HonorKeepAlive attribute 89
 - ReceiveTimeout attribute 88
 - RedirectURL attribute 100
 - SendTimeout attribute 88
 - ServerCertificate 90
 - ServerCertificateChain 100
 - ServerPrivateKey attribute 90
 - ServerPrivateKeyPassword attribute 90
 - ServerType attribute 89
 - SuppressClientReceiveErrors attribute 89
 - SuppressClientSendErrors attribute 89
 - TrustedRootCertificate attribute 90
 - UseSecureSockets attribute 100

- I**
- i18n-context:client 159
 - InboundCodeSet 160
 - LocalCodeSet 160
 - OutboundCodeSet 160
- i18n-context:server 160
 - InboundCodeSet 160
 - LocalCodeSet 160
 - OutboundCodeSet 160
- IDL types
 - fixed 22
 - Object 33
 - sequence 28
 - typedef 26
- iiop:address 103
 - location attribute 103
- iiop:payload 104
 - type attribute 104
- iiop:policy 105
 - persistent attribute 105
 - poaname attribute 105
 - serviceid attribute 105
- IOR 101, 103

- J**
- jms:address 125
 - connectionPassword attribute 126
 - connectionUserName attribute 126
 - destinationStyle attribute 126
 - jndiConnectionFactoryName attribute 126
 - jndiDestinationName attribute 126
 - jndiReplyDestinationName 126
- jms:client 127
 - messageType attribute 127
- jms:JMSNamingProperty 126
 - name attribute 126
 - value attribute 126
- jms:server 127
 - durableSubscriberName attribute 128
 - messageSelector attribute 128
 - transactional attribute 128
 - useMessageIDAsCorrelationID attribute 128
- JNDI
 - connection factory 126

- L**
- load balancing 146

M

message broadcasting 146
 mime:content 11
 part attribute 11
 type attribute 11
 mime:multipartRelated 10
 mime:part 11
 name attribute 11
 mq:client 108
 AccessMode attribute 117
 AccountingToken attribute 110
 AliasQueueName attribute 114
 ApplicationData attribute 110
 ApplicationIdData attribute 110
 ApplicationOriginData attribute 110
 ConnectionFastPath attribute 109
 ConnectionName attribute 109
 ConnectionReusable attribute 109
 CorrelationId attribute 110
 CorrelationStyle attribute 116
 Delivery attribute 119
 Format attribute 122
 MessageExpiry attribute 109
 MessageId attribute 110
 MessagePriority attribute 118
 ModelQueueName attribute 109
 QueueManager attribute 108
 QueueName attribute 109
 ReplyQueueManager attribute 109
 ReplyQueueName attribute 109
 ReportOption attribute 120
 Server_Client attribute 113
 Timeout attribute 109
 Transactional attribute 119
 UsageStyle attribute 116
 UserIdentification attribute 110
 mq:server 111
 AccessMode attribute 117
 AccountingToken attribute 112
 ApplicationData attribute 112
 ApplicationOriginData attribute 112
 ConnectionFastPath attribute 111
 ConnectionName attribute 111
 ConnectionReusable attribute 111
 CorrelationId attribute 112
 CorrelationStyle attribute 116
 Delivery attribute 119
 Format attribute 122
 MessageExpiry attribute 112

MessageId attribute 112
 MessagePriority attribute 118
 ModelQueueName attribute 111
 PropagateTransactions attributes 112
 QueueManager attribute 111
 QueueName attribute 111
 ReplyQueueManager attribute 111
 ReplyQueueName attribute 111
 ReportOption attribute 120
 Server_Client attribute 113
 Timeout attribute 112
 Transactional attribute 119
 UsageStyle attribute 116

P

POA policies 102, 105
 port address
 HTTP 84
 primitive types
 mapping to a fixed binding 45
 mapping to a tagged binding 58
 mapping to a TibrvMsg 65, 75
 mapping to CORBA 14
 mapping to FML 39

R

reply queue
 queue manager 109, 111
 queue name 109, 111
 request queue
 queue manager 108, 111
 queue name 109, 111
 routing:contains 152
 contextAttributeName attribute 152
 contextName attribute 152
 ignorecase attribute 152
 value attribute 152
 routing:destination 147
 id attribute 148
 port attribute 148
 route attribute 148
 service attribute 148
 routing:empty 152
 contextAttributeName attribute 153
 contextName attribute 153
 routing:endswith 151
 contextAttributeName attribute 152
 contextName attribute 151

- ignorecase attribute 152
- value attribute 152
- routing:equals 149
 - contextAttributeName attribute 149
 - contextName attribute 149
 - ignorecase attribute 149
 - value attribute 149
- routing:expression 145
 - evaluator attribute 146
 - name attribute 145
- routing:greater 150
 - contextAttributeName attribute 150
 - contextName attribute 150
 - value attribute 150
- routing:less 150
 - contextAttributeName attribute 150
 - contextName attribute 150
 - value attribute 150
- routing:nonempty 153
 - contextAttributeName attribute 153
 - contextName attribute 153
- routing:query 147
- routing:route 146
 - multiRoute attribute 146
 - failover 146
 - fanout 146
 - loadBalance 146
 - name attribute 146
- routing:source 146
 - port attribute 147
 - service attribute 147
- routing:startswith 151
 - contextAttributeName attribute 151
 - contextName attribute 151
 - ignorecase attribute 151
 - value attribute 151
- routing:transportAttribute 148

S

- sequence complexType
 - mapping to a fixed binding 52
 - mapping to a tagged binding 59
- service failover 146
- soap:address 84
 - location attribute 84
- soap:binding 4
 - style attribute 4
 - transport attribute 5
- soap:body 6

- encodingStyle attribute 7
- namespace attribute 7
- parts attribute 8
 - use attribute 6
 - encoded 7
 - literal 7
- soap:fault 9
 - name attribute 9
 - use attribute 9
 - encoded 7
 - literal 7
- soap:header 8
 - encodingStyle attribute 8
 - message attribute 8
 - namespace attribute 9
 - part attribute 8
 - use attribute 8
 - encoded 7
 - literal 7
- soap:operation 5
 - soapAction attribute 6
 - style attribute 5
- specifying a password
 - HTTP 86
- specifying a user name
 - HTTP 86

T

- tagged:binding 55
 - fieldNameValueSeparator attribute 56
 - fieldSeparator attribute 56
 - flattened attribute 56
 - ignoreCase attribute 57
 - ignoreUnknownElements attribute 56
 - messageEnd attribute 56
 - messageStart attribute 56
 - scopeType attribute 56
 - selfDescribing attribute 56
 - unscopedArrayElement attribute 56
- tagged:body 57
- tagged:case 62
 - name attribute 62
- tagged:choice 61
 - alias attribute 61
 - discriminatorName attribute 61
 - name attribute 61
- tagged:enumeration 58
 - value attribute 58
- tagged:field 58

- alias attribute 58
 - name attribute 58
 - tagged:operation 57
 - discriminator attribute 57
 - discriminatorStyle attribute 57
 - tagged:sequence 59
 - alias attribute 60
 - name attribute 60
 - occurs attribute 60
 - tibrv:array 71
 - elementName attribute 71
 - integralAsSingleField attribute 71
 - loadSize attribute 72
 - sizeName attribute 72
 - tibrv:binding 67
 - stringAsOpaque attribute 68
 - stringEncoding attribute 68
 - tibrv:context 76
 - tibrv:field 75
 - alias attribute 75
 - element attribute 75
 - id attribute 75
 - maxOccurs attribute 75
 - minOccurs attribute 75
 - name attribute 75
 - type attribute 75
 - value attribute 75
 - tibrv:input 69
 - messageNameFieldPath attribute 69
 - messageNameFieldValue attribute 69
 - stringAsOpaque attribute 69
 - stringEncoding attribute 69
 - tibrv:msg 74
 - alias attribute 74
 - element attribute 75
 - id attribute 75
 - maxOccurs attribute 75
 - minOccurs attribute 75
 - name attribute 74
 - tibrv:operation 68
 - tibrv:output 70
 - messageNameFieldPath attribute 70
 - messageNameFieldValue attribute 70
 - stringAsOpaque attribute 71
 - stringEncoding attribute 70
 - tibrv:port 132
 - bindingType attribute 136
 - callbackLevel attribute 136
 - clientSubject attribute 133
 - cmListenerCancelAgreements attribute 134
 - cmQueueTransportCompleteTime attribute 135
 - cmQueueTransportSchedulerActivation attribute 135
 - cmQueueTransportSchedulerHeartbeat attribute 135
 - cmQueueTransportSchedulerWeight attribute 135
 - cmQueueTransportServerName attribute 137
 - cmQueueTransportWorkerTasks attribute 135
 - cmQueueTransportWorkerWeight attribute 134
 - cmSupport attribute 133
 - cmTransportClientName attribute 134
 - cmTransportDefaultTimeLimit attribute 134
 - cmTransportLedgerName attribute 134
 - cmTransportRelayAgent attribute 134
 - cmTransportRequestOld attribute 134
 - cmTransportServerName attribute 137
 - cmTransportSyncLedger attribute 134
 - responseDispatchTimeout attribute 137
 - serverSubject attribute 133
 - transportBatchMode attribute 133
 - transportDaemon attribute 133
 - transportNetwork attribute 137
 - transportService attribute 137
 - timeouts
 - HTTP 86
 - MQ 109, 112
 - transactions
 - MQ 119
 - tuxedo:binding 40
 - tuxedo:field 41
 - id attribute 41
 - name attribute 41
 - tuxedo:fieldTable 40
 - type attribute 41
 - tuxedo:input 130
 - operation attribute 130
 - tuxedo:operation 41
 - tuxedo:server 129
 - tuxedo:service 130
 - name attribute 130
- ## U
- unions
 - mapping to a fixed binding 50
 - mapping to a tagged binding 61
 - mapping to CORBA 24

X

- xformat:binding 79
 - rootNode attribute 79
- xformat:body 80
 - rootNode attribute 80

